


Effect of added authentication traffic on ordinary reception

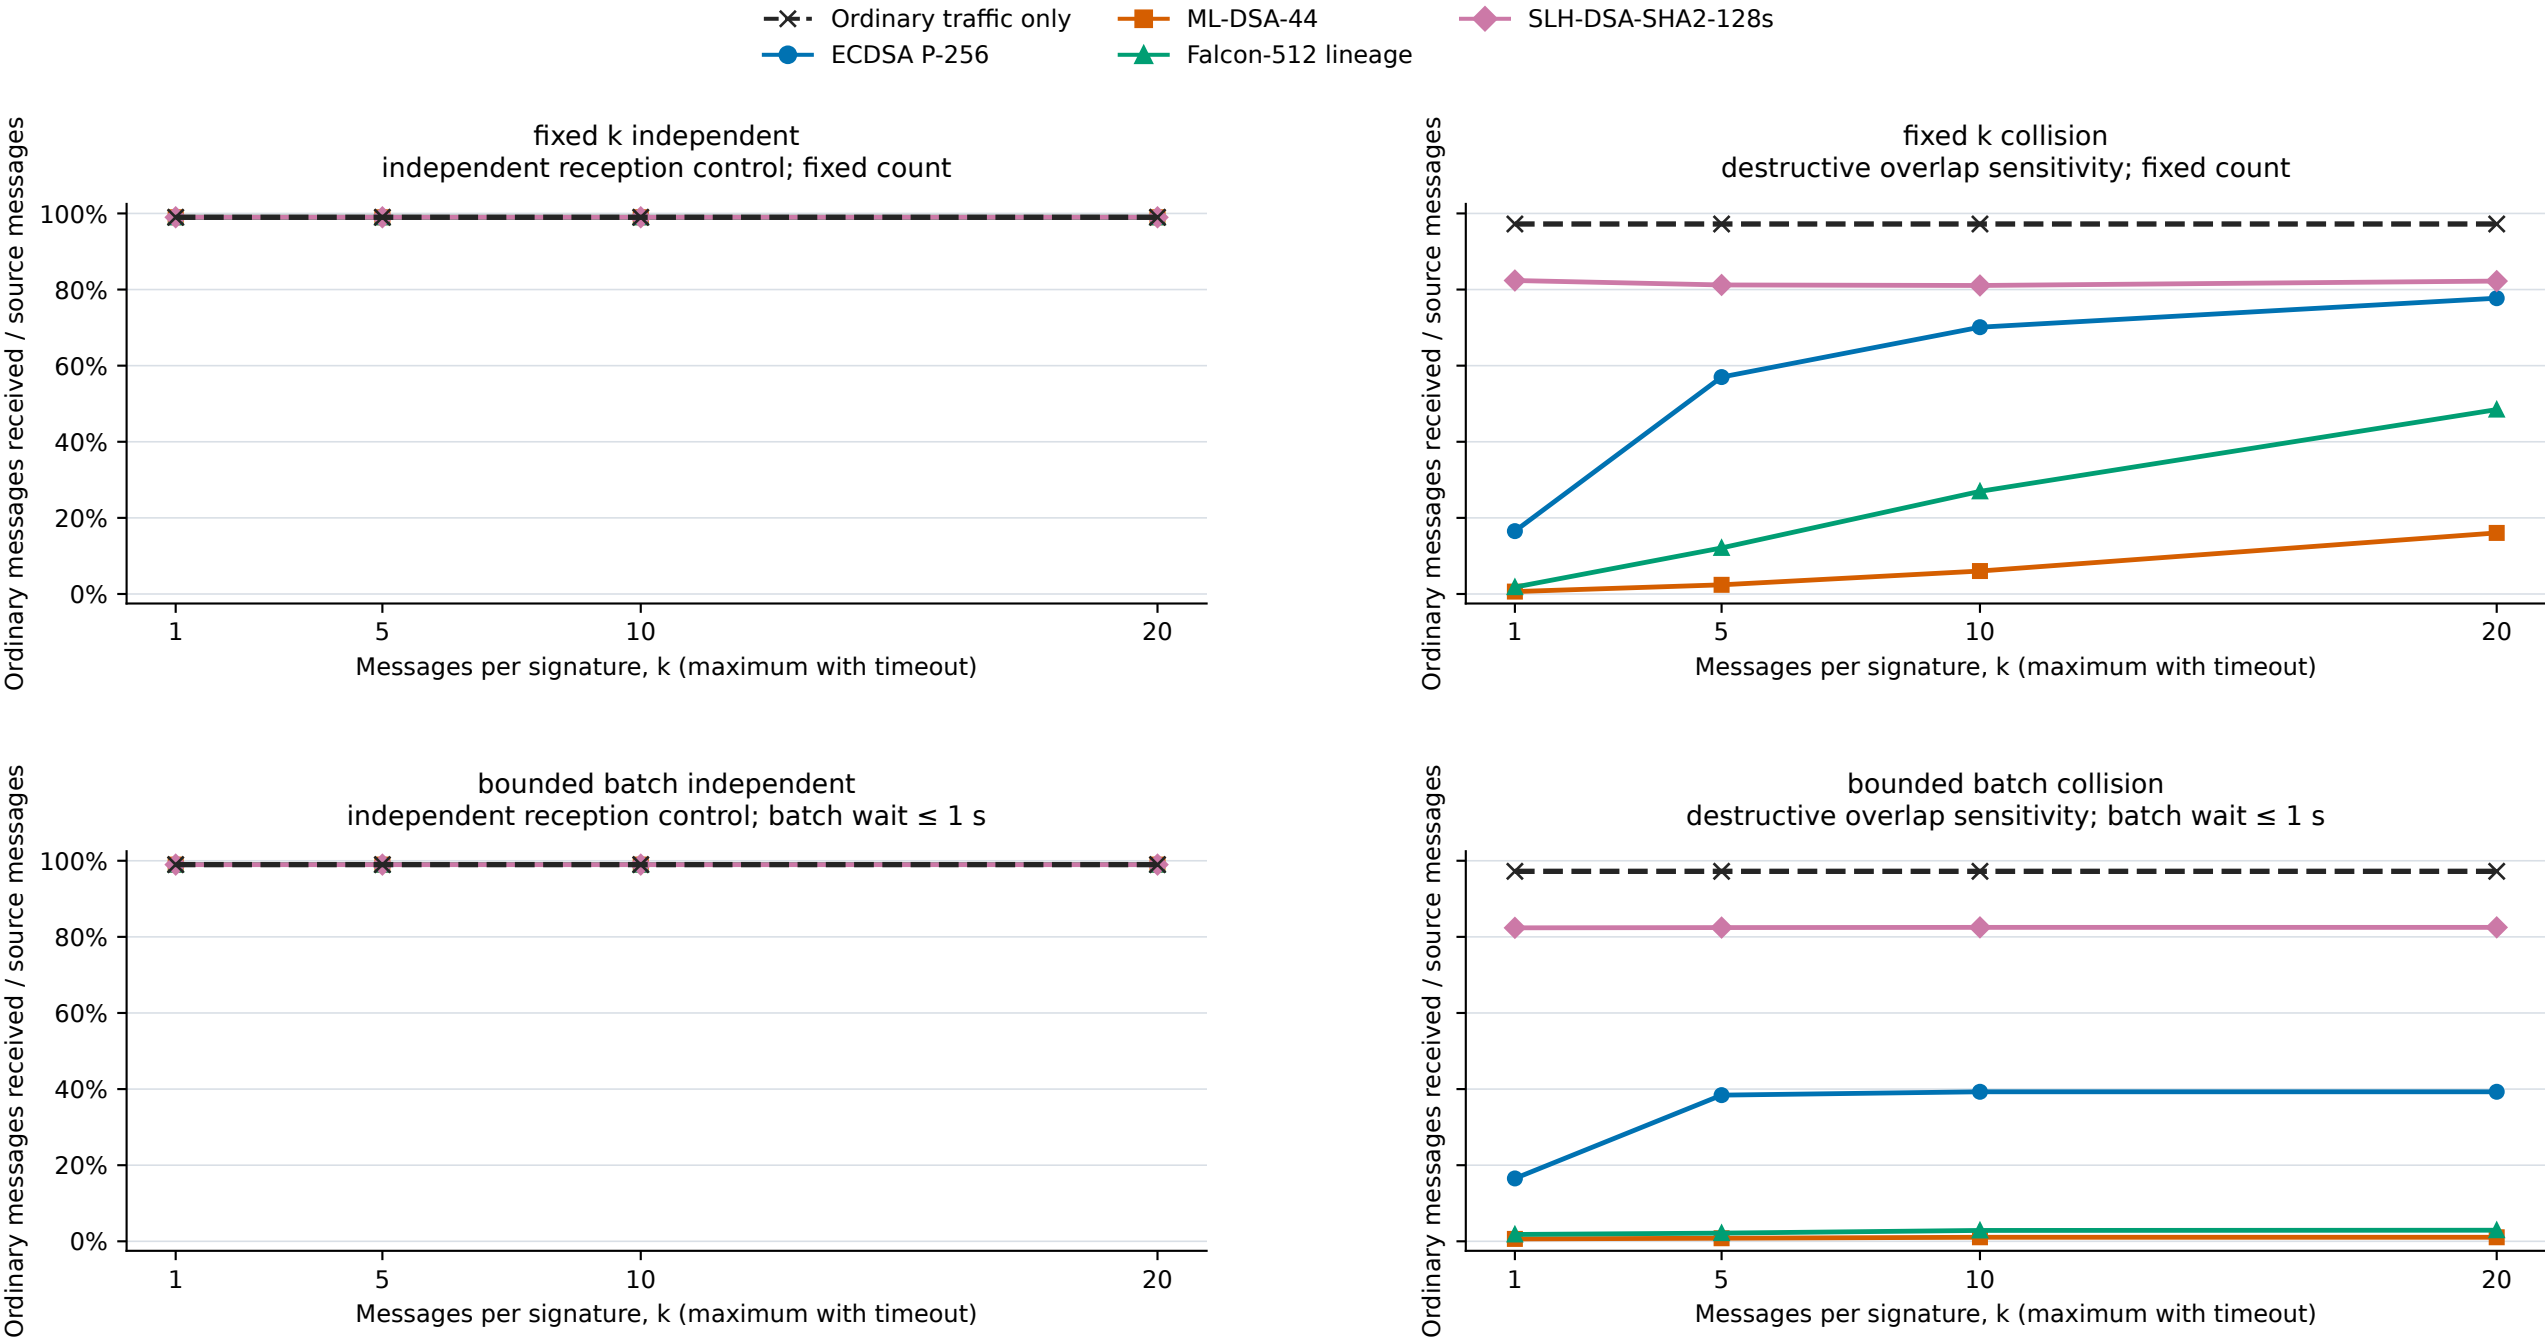

Dashed baseline and colored authentication cases share the same original transmissions and exogenous loss draws; denominator is all source messages. Original emissions are never held for signing. Differences here reflect reception loss from modeled added traffic, not an airborne transmission delay. Follow-up after capture: 60 s; finite observation horizon, with no authentication-age expiry. One deterministic seed (1); no confidence intervals. Destructive overlap is an uncalibrated sensitivity model: one collision domain, all overlaps erased, no power/capture effects. Hardware profiles: sender embedded_reference; receiver embedded_reference. Composite embedded references mix platforms and include lineage proxies; no aircraft WCET claim.