

SC-20e INTEGRATING SOUND LEVEL METER

- Type 1 integrating sound level meter according to EN 60651 and EN 60804.
- Easy to use.
- Measures all parameters at the same time: L_S , L_F , L_{eqT} , $L_{eq1''}$, L_{Cpk} , L_1 , L_5 , L_{10} , L_{50} , L_{90} , L_{95} , L_{99} , maximum values, duration of measurement and L_{eqt} with programmable t.
- 23 – 130 dB measurement range.
- One single scale (no scale changes).
- A and C frequency weightings.
- Allows you to store the measurement results in the memory and save all the measured parameters second by second for 3 hours.
- Equipped with AUTOSTORE recording for long-duration (1 week) L_{eq} measurements.
- Includes software to transfer all measured and recorded parameters to a PC.
- Removable preamplifier, CNR-012 extension cable and TK-1000 outdoor kit.

The **SC-20e** is an easy to use, high performance Type 1 integrating-averaging sound level meter. It measures all functions simultaneously and displays the chosen one on screen when the functions selector is activated. Once one measurement is completed, they may all be consulted together with their maximum values and percentiles. The **SC-20e** needs no scale changes as its single scale encompasses the entire measurement range.

The **SC-20e** may be connected to a computer. The **SC-20e** is supplied with a programme for PC or compatible unit that permits communication with the **SC-20e**, graphical and numerical presentations, storing results on the hard disk, statistical analyses and so on. The unit may also be connected to a printer to print out the values of the function selected. At the end of each printout a summary appears with the value of all the functions and a statistical analysis.

The DC output of the **SC-20e** maintains a constant tension equivalent to the value displayed on screen. This output allows you to connect the unit to a graphic recorder.

The AC output gives you the preamplifier output signal without frequency weighting. This output may be used for the calibrated recording of the measured signal on DAT or magnetic tape.

The **CESVA SC-20e** integrating-averaging sound level meter allows you to make RECORDINGS of the measured data, store MEMORIES of the final results of the measurements and make AUTOSTORE recordings of the equivalent continuous level. A RECORDING stores all the measured data second by second. A MEMORY saves only the final result of a measurement. The AUTOSTORE recordings allow you, for a programmable period, to store consecutive equivalent continuous level measurements corresponding to an integration time, which is also programmable. All the data stored in the sound level meter's internal memory (recordings, memories and autostore recordings) may be retrieved only by using the PC software designed for the **SC-20e** sound level meter.

The **SC-20e** preamplifier is removable, allowing it to be detached and placed at a distance from the **SC-20e** using the CNR-012 extension cable. There is also an outdoor kit (TK-1000) for taking measurements in the open air.



TECHNICAL SPECIFICATIONS

STANDARDS AND REGULATIONS

The **SC-20e** complies with the following standards:

- EN 60651:1994 (A1:1994) type 1
- EN 60804:1996 (A2:1997) type 1
- **CE** mark. Complies with 73/23/EEC low tension standards and CEM 89/336/EEC mod standards for 93/68/EEC

MEASUREMENT RANGE

L_F , L_S , L_E , L_{eqT} , $L_{eq1''}$, L_{eqt}

Limits: 0 – 137 dB

Upper crest factor limit 3: 130 dB

L_{Cpk}

Limits: 70 – 140 dB

ELECTRICAL NOISE

Electrical noise

Freq. Wei. A and C: 14.5 and 22.0 dB (typical)

Elec. noise + thermal μ phone C-130

Freq. Wei. A and C: 19.0 and 23.0 dB (typical)

Elec. noise + thermal μ phone C-250

Freq. Wei. A and C: 19.3 and 23.3 dB (typical)

FREQUENCY WEIGHTING

Complies with

EN 60651:1994(A1:1994) standard as class 1

A and C weightings: class 1.

AC OUTPUT

Frequency weighting: linear

Sensitivity at 137 dB and 1 kHz:

3.8 Vrms (typical)

Upper limit: 4.5 Vrms (typical)

Output impedance: 300 Ω

DC OUTPUT

Sensitivity: 10 mV/dB

Upper limit: 1.4 V (140 dB)

Output impedance: 100 Ω

Maximum error: ± 4 mV (± 0.4 dB compared to the on-screen value)

SERIAL INTERFACE

9-pin sub-D connector

Velocity: 9600 bauds

Data bits: 8 bits

Stop bits: 1 bit

Parity: None

MICROPHONE

Model: **CESVA** C-130

$\frac{1}{2}$ " condenser microphone

Polarization: 200 V

Nominal capacity: 22.5 pF

Nominal sensitivity: 16 mV/Pa in reference conditions.

Model: **CESVA** C-250

$\frac{1}{2}$ " condenser microphone

Polarization: 0 V (pre-polarized)

Nominal capacity: 17.0 pF

Nominal sensitivity: 46.4 mV/Pa in reference conditions.

TIME WEIGHTING

L_F , L_S , according to class 1 tolerances.

PARAMETERS

Functions: L_F , L_S , L_E , L_{Cpk} , L_{eqT} , $L_{eq1''}$, L_{eqt}

Resolution: 0.1 dB

MEMORY

Storage capacity:

Memories: 1,999 registers

Recordings: 190 minutes

AUTOSTORE recordings: 168 h

BATTERY

One 9-volt 6LF22 battery

Normal duration in constant use:

Alkaline: 5 h Lithium: 15 h

DIMENSIONS and WEIGHT

335 x 82 x 19 mm

With battery 565 g without 510 g


Windows Software® 9x/Me/2000/NT

The **SC-20e** is supplied with free software that allows you to visualise on a PC screen and in real time all the data measured by the sound level meter and retrieve the data stored in the sound meter memory.

The software allows you to generate complete reports of the measurements, visualise all the data numerically, graphically, and statistically, and make advanced calculations of acoustic parameters.



Main menu

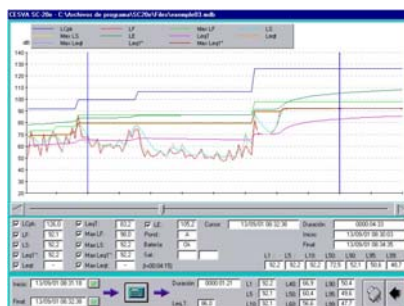

Acquisition and memories

Report printout

STANDARD ACCESSORIES

Case **FNS030**

Wind screen **PVM05**

9-volt battery

PC programme **SFT-021**

PC connector cable **CNRS232**, printer adaptor **A232P**

OPTIONAL ACCESSORIES

CB-5

Sound calibrator

TR-40

Tripod

ML-50

Transporting briefcase (49 x 36 x 14 cm)

ML-10

Transporting briefcase (30 x 38 x 8 cm)

A-400

Mains feed 220V to 9 V

A-101

Battery feed 12 V to 9 V

CNR-012

Microphone extension cable

TK-1000

Outdoor kit

DICESVA S. L.

Villar, 20 - 08041 Barcelona (Spain)

Tel. (34) 934 335 240 - Fax. (34) 933 479 310

e-mail: info@cesva web: www.cesva.com

The characteristics, technical specifications and accessories may vary without prior notice.