

PIPELINE EQUIPMENT, Inc.--Extrusion Division

CUSTOMER: Pipeline Equipment Inc.
8403 S 89th W Ave

Tulsa Ok 74131

CUSTOMER JOB NO.: 74769

CUSTOMER P.O. NO.: 74769-04

CUSTOMER PROJECT:

8403 South 89th West Ave.

Tulsa, Ok. 74131

SPECIFICATION : WPHY-65

HEAT TREATMENT : Normalize

P.E.I.-EXTRUSION JOB NO : 225-001

20" x .594" x 4" SXH x 20" x .594" x

API5LX-65

CERTIFICATE OF COMPLIANCE / CONFORMANCE REPORT

The finished product was produced in the U.S.A.

Material manufactured and tested in accordance with purchase order requirements and specification(s).

225-001

DESCRIPTION : 20" O.D. x .594" Wall x (2) 4.500" O.D. x .337" Wall x API5LX-65

Base Material : Supplied Header material: 20" O.D. x 1.031" Wall} x API5LX-65

Heat Treatment : As Required.

Testing : U/T prior to drill

Testing : 65000 Yield

Testing : 77000 Tensile

Testing : Charpy Impacts - Type A - V - Notch per ASTM A-370

Testing : Charpy Impacts Criteria Meeting 20 Foot Pounds Min. Avg. // No Values Below 15 Foot Pounds // @ -20 ° F. Temp.

Testing : PT Extruded Outlet Area 100% per acceptance standards ASME Code, Section VIII, Div.I

Design Conditions : B31.8 ; 1,800 PSIG; 100 °F. Temp.; .000" C.A.; 0.5" D.F.

Comments : Both ends back tapered to .594" wall

MARK NO.: QTY

MK# 20 x 4 Right Hand 2

DESCRIPTION

20" x .594" x (2) 4" XH x API5LX-65 x 5'-0" Long

SPEC.

WPHY-65

HEAT SYMBOLS


945427

The undersigned certifies, to the best of his (our) knowledge, that the contents of this report is correct and accurate and that all above test results and operations performed are in compliance with requirements of the applicable sections of the above stated specifications and purchase orders.

Giller 2/23/26

Job No.: 226-001
Mk. No.: (SEE MK. No.)
Material: WPHY-65
Heat No.: 94543

RN 2-20-26

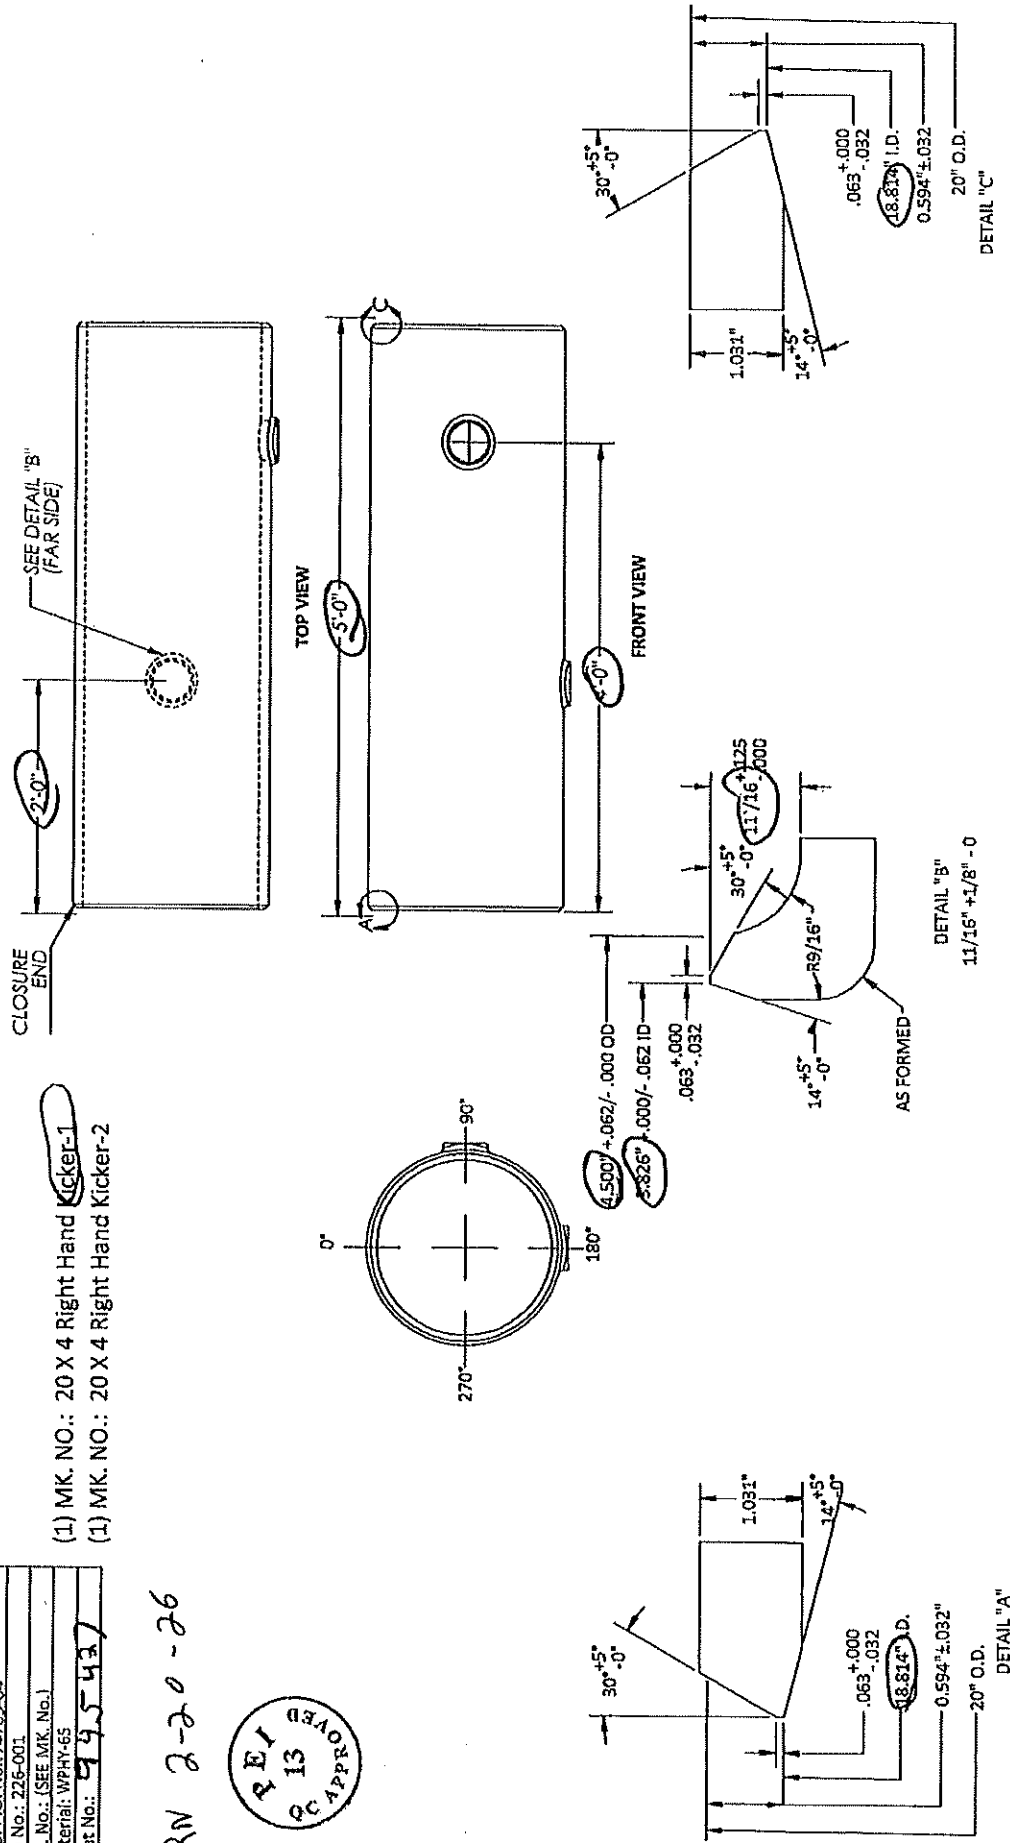

NPS: 20" x .594" x 4" XH x 20" x .594"
Header Size: 20" X 1.031"
Extrusion Size: 4.500" O.D. X .337"
Material: API 5L X65 WPHY-65
Design Press. 1800 PSIG @ 100° F
Code: B31.8 D.F. D.5

Pipeline Equipment, Inc.

Extrusion Division

NOTE:



1. DIE TOLERANCE $\pm .032$.
2. HEIGHTS EXCEEDING LISTED OUTLET HEIGHT TOLERANCES ARE ALLOWED.
3. OUTLET LOCATION TOLERANCES $\pm 1/8"$.

P.E.D. Job No.: 226-001
Customer: PIPELINE
Cust. Ref. No.: 74769-04
Date: 5/5/2025 By: N
Dwr. No.:

TAG: P.O. No.: 74769-04
Job No.: 226-001
Mk. No.: (SEE MK. No.)
Material: WPHY-65
Heat No.: 945437

(1) MK. NO.: 20 X 4 Right Hand Kicker-1
(1) MK. NO.: 20 X 4 Right Hand Kicker-2

RN 2-20-26

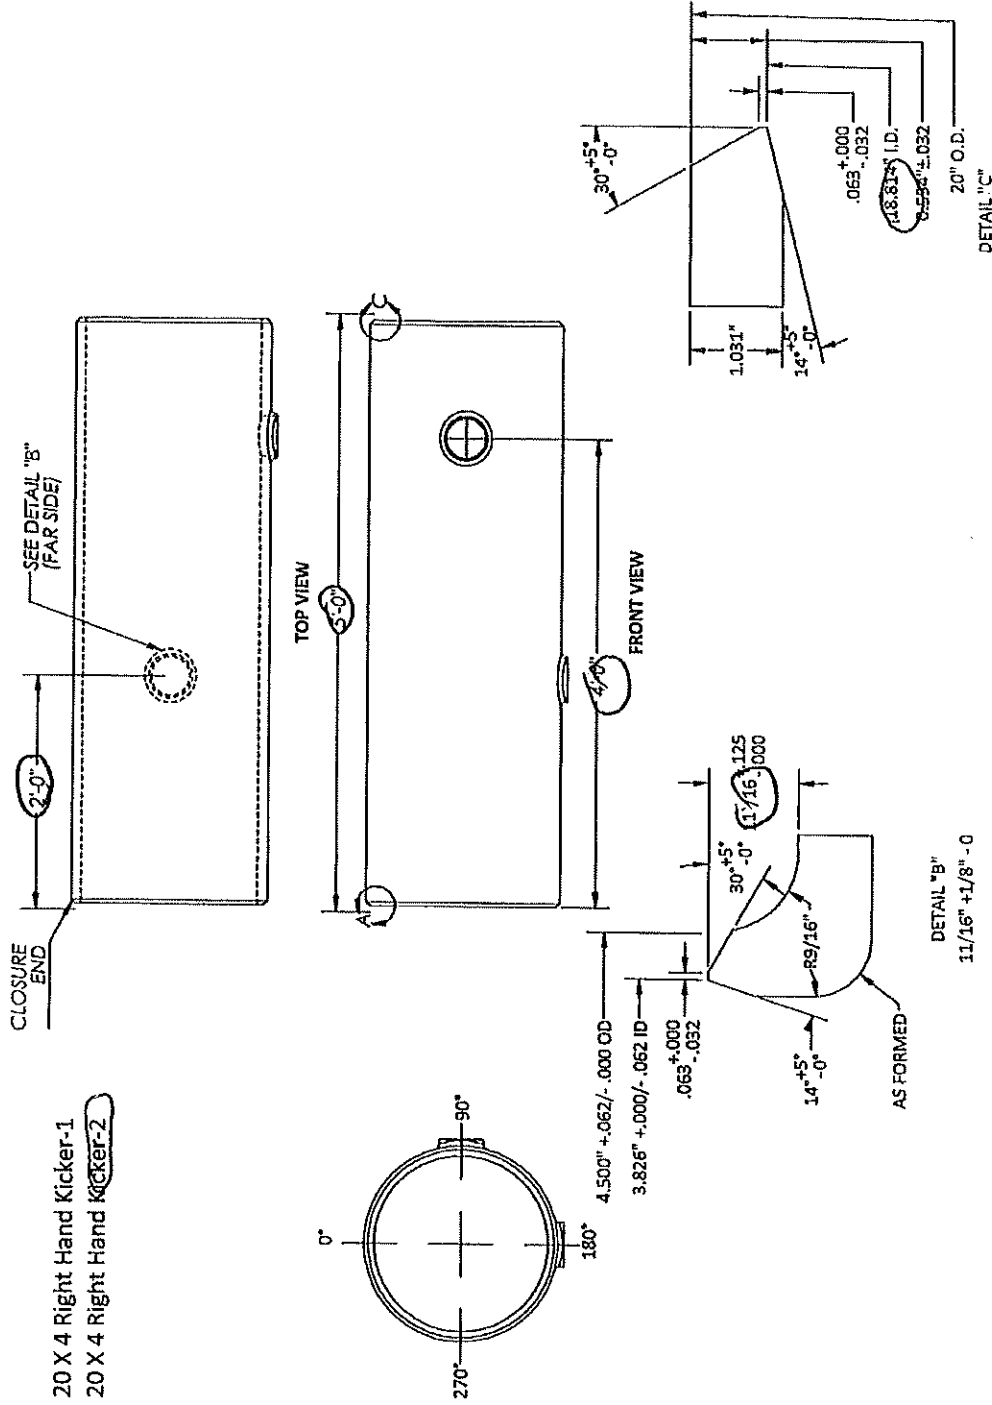

Extrusion Division

- NOTE:
1. DIE TOLERANCE $\pm .032$.
 2. HEIGHTS EXCEEDING LISTED OUTLET
 3. OUTLET LOCATION TOLERANCES $\pm 1/8$ ".

NPS: 20" x 594" x 4" XH x 20" x .594"
Header Size: 20" x 1.031"
Extrusion Size: 4.500" O.D. x .337"
Material: API 5L X65 WPHY-65
Design Press: 1800 PSIG @ 100° F
Code: B31.8 D.F. 0.5

P.E.D. Job No.: 226-001
Customer: PIPELINE
Cust. Ref. No.: 74769-04
Date: 5/5/2025 By: NB
Dwg. No.:

8403 South 89th West Avenue
Tulsa, OK 74131

Dye Penetrant Examination

PEI Job # 226-001

Purchase Order # 74769-04

Customer Name PFD

Customer Job #

Pipe Size 20" x 1.031"

Date 02/19/26

Item Material WPHY-65

Type of Item _____ Kicker _____

Type of Surface Carbon Steel

Method

Solvent Removable ☐Water Washable ☒Post Emulsifying ☐

Type

Visible ☒

Flourescent ☐

Examination Material	Manufacturer	Type	Batch #	Minimum Dwell / Dry Time
Cleaner	WATER			UNTIL DRY
Penetrant	Sherwin	Dubl-Chek	BC34-K47	5 MIN.
Developer	Sherwin	Dubl-Chek	BC527-C6	UNTIL DRY

Relevant Indications, Evaluation

[illegible]

Performed In Accordance With ☒ ASME V & ASME VIII Div 1 / ASME VII Div 2

☐ Other (specify) _____

Examiner Robbie Nichols

Date 2-23-26

ASNT-TC-1A Level II

Certification Expiration	04/01/27
---------------------------------	-----------------

Witnessed By G. H. ...

Date 2/19/26

Approved By

Date _____

STRESS TECH

THERMAL PROCESSING

HEAT CHART & CERTIFICATION

CUSTOMER : [PIPELINE EQUIPMENT INC]

Order: 4432

PURCHASE ORDER # 22600202

DATE:02 /14/26

DESCRIPTION SERVICE QTY


1400 1HR AIR STILL COOL

FURNACE #69 7.5 MIN TRULINE CHART
CALIBRATION DATE 5-26-25

20"KICKER HT# 945427 MK.NO 20X4
RIGHT HAND KICKER-1-2

WT#

CUSTOMER REQUIREMENT

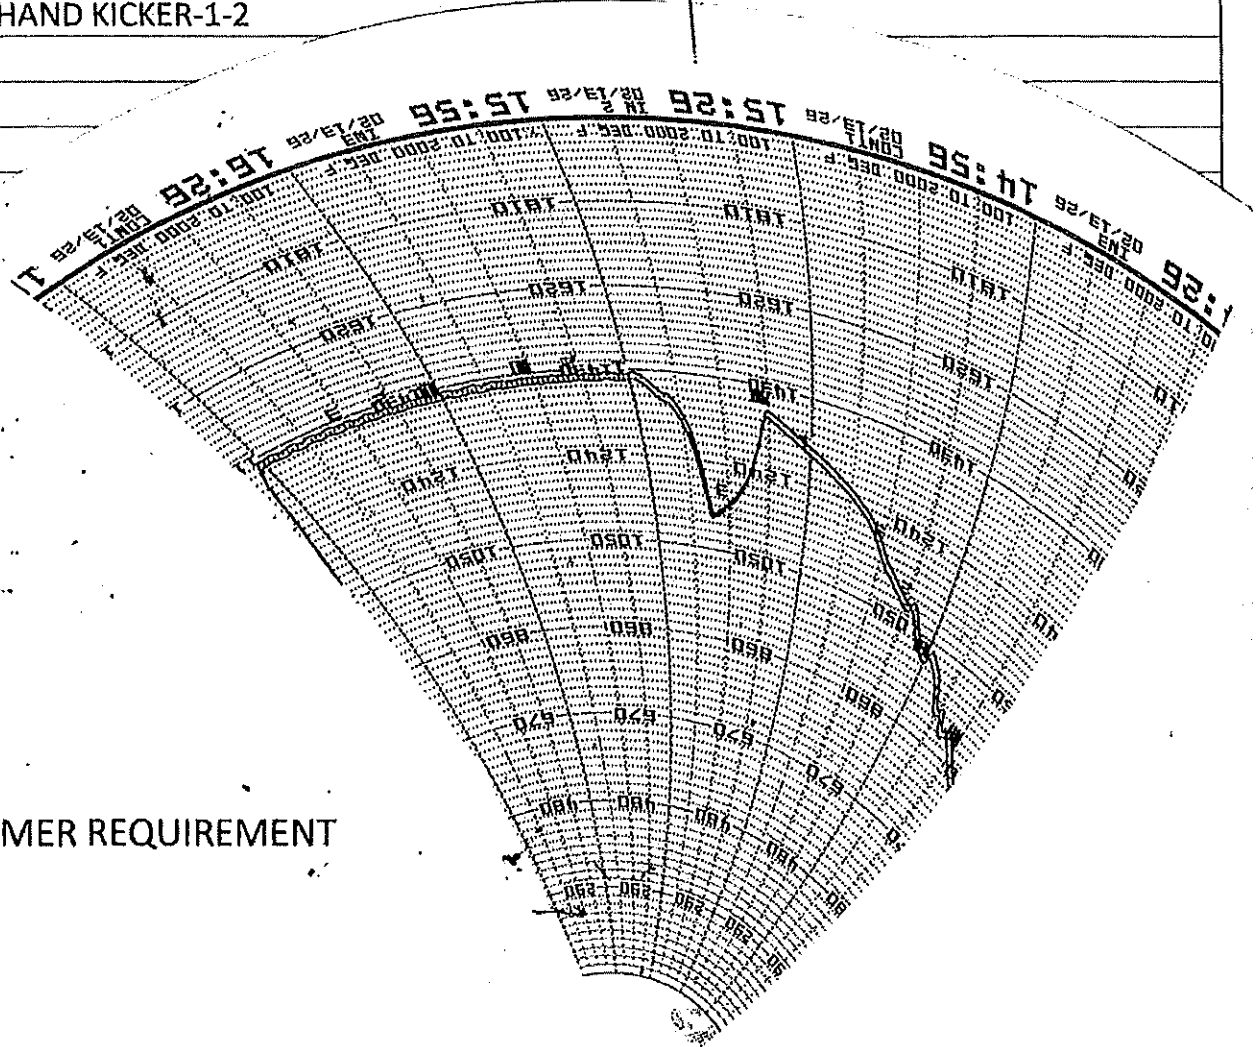



ULTRASONIC THICKNESS LONGITUDINAL INSPECTION REPORT

US3067-UT5-527
Page 1 of 1

Procedure: NDT 4.1 Rev 12		Client: PIPELINE EQUIPMENT INC	Date: 2026-Feb-12
Technique: Standard		Apave #: TUN2600518	Job #: 226-001
Code/Standard: Customer Specification		Item Inspected: Cylinder prior to pulling	PO #: 226-001
Nominal Thickness: .844	Other: 1.031	Location: Tulsa	
Material Type: Carbon Steel	Surface Condition: Polished	Method of Scanning: Continuous scan or grid	Scanning Surface: O.D.
Probe Model: Olympus	Serial #: 122035	Angle: 0°	Type: Single
		Frequency (MHz): 2.25	Crystal Size: 1
Equipment Manufacturer: Olympus		Type: 650	Serial #: 1109091107
Annual Calibration (Linearity) Date: 2025-Jul-15		Cable Type: RG174	Length: 5 Ft
Standardization	1) Type: IIW	Material: 1018 CS	Serial #: U23001
Block(s):	2) Type: IIW	Material: 1018 CS	Serial #: U23001
Standardization Block Temperature: 65 °F		Couplant: UTX	Batch #: 65-002
		Reference Gain: 6 db	
Skin Temperature: ☒ Below 200 °F ☐ Over 200 °F (exact temperature): 60 °F			

Inspection Results: No indications found . Ultrasonic inspection is acceptable per customers requirements.

1- MK#12 X 4 RHK-1==>12.750" OD X 0.844" WALL X WPHY-52 X 5'0" LONG W/(2) 4" OUTLETS. HT#210483

1- MK#12 X 4 RHK-2==>12.750" OD X 0.844" WALL X WPHY-52 X 5'0" LONG W/(2) 4" OUTLETS. HT#210483

1- MK#20 X 4 RHK-1==>20" OD X 1.031" WALL X WPHY-65 X 5'0" LONG W/(2) 4" OUTLETS. HT#945427

1- MK#20 X 4 RHK-2==>20" OD X 1.031" WALL X WPHY-56 X 5'0" LONG W/(2) 4" OUTLETS. HT#945427

Remarks/Limitations:

Personnel: Mike Carman

Consumables:

Interpretation By: Mike Carman	SNT-TC-1A: II	Client Representative: <i>Given</i>
(Print)	(Level)	(Print)
<i>MP</i>	CERT #: 336	I am in full agreement with report contents.
(Sign)		(Sign)

Our Core Values revolve around our Safety and Quality Practices. We will always take care of our employees and customers.

1-855-567-5511

www.irisndt.com

info.us@irisndt.com

PED 226-001

MK20X4P.H.K-1

HT945427

WPMY765

1800PS1C

100°F

0.5-D.F

20X594X4X11

PED 226-001

MK20X4-R.H.K.2

HT-945427

WPHY-65

1800 P.S.I.G

100°F

0.5 D.F

20X.594X4XH