



Monday Sep-08-2025

Flowserve Facility:

Flowserve Nordstrom / Valbart Valves
1511 Jefferson St.
Sulphur Springs, TX 75482

To:

cmtrs@flowserve.com

CERTIFICATE OF CONFORMANCE

SERIAL #	HEAT #	PO #	Description	Valve Type	Class	End Connection
61-698884	698884	662668300	10" 2349 A SP	PLUG	900	FLG
61-698884	3224674AB0	662668300	10" 2349 A SP	PLUG	900	FLG
61-698884	AA2716	662668300	10" 2349 A SP	PLUG	900	FLG
61-698885	698885	662668300	10" 2349 A SP	PLUG	900	FLG
61-698885	3224674AB0	662668300	10" 2349 A SP	PLUG	900	FLG
61-698885	AA2717	662668300	10" 2349 A SP	PLUG	900	FLG
61-698886	698886	662668300	10" 2349 A SP	PLUG	900	FLG
61-698886	3224674AB0	662668300	10" 2349 A SP	PLUG	900	FLG
61-698886	AA2716	662668300	10" 2349 A SP	PLUG	900	FLG
61-698887	698887	662668300	10" 2349 A SP	PLUG	900	FLG
61-698887	3224674AB0	662668300	10" 2349 A SP	PLUG	900	FLG
61-698887	V7557	662668300	10" 2349 A SP	PLUG	900	FLG

We hereby certify that all the subject valves/parts/sealant have been manufactured in conformance with the applicable requirements of Flowserve Sulphur Springs Operation (FSSO) specifications and that the valve/parts/sealant materials for component parts meet the applicable requirements of FSSO drawings and ASTM specifications, ASME B16.34 (if Applicable), API Q1 10th edition, and API 6D 25th edition (if applicable to the API monogram). Flowserve Dynamic Balanced Valves are provided with a Pressure balance feature unless specifically identified in the Valve description. All valves/parts/sealant meet all the requirements of the customer purchase order.



SULPHUR SPRINGS OPERATION
PLUG VALVE TEST RECORD

SIZE: 10	PRESSURE: 900
FIGURE NUMBER: H2349 A SP	
B/M NO.: F01700482	
ASSEMBLY ORDER NO.: H3600623	

VALVE TESTED PER RMP: 61196
REV: 19
E.I DRAWING NO.: 21700482

API SERIAL NO.:	61-698884
MMN SERIAL NO.:	B96136
BODY SERIAL NO.:	
BODY HEAT NO.:	AA2716
BODY RADIOGRAPH NO.:	X
COVER HEAT NO.:	3224674AB0
STEM JOB NO.:	X
PLUG JOB NO.:	X
TYPE OF OPERATOR:	OHM-TECH
SEALANT:	950

TEST PRESSURES, PSIG	OPERATION	SHELL	SEAT
2250		3400	2445
TEST DURATION TIME, MIN.		15	5

TEST RESULTS		ACCEPTANCE
SHELL HYDROSTATIC TEST	PASSED: ☒ FAILED: ☐	NO LEAKAGE
PRESS. GAUGE RANGE & ID. No.	HYDRO-2	
DIFFERENTIAL PRESSURE TORQUE	AA= SEAT 19 FT-LBS.	MAX: 27
	AB= SEAT 18 FT-LBS.	
SEAT HYDROSTATIC	AA= SEAT PASSED: ☒ FAILED: ☐	NO LEAKAGE
	AB= SEAT PASSED: ☒ FAILED: ☐	
PRESS. GAUGE RANGE & ID. No.	HYDRO-2	
SEAT AIR (IF SPECIFIED)	AA= SEAT PASSED: ☐ FAILED: ☐	NO LEAKAGE
	AB= SEAT PASSED: ☐ FAILED: ☐	
PRESS. GAUGE RANGE & ID. No.		
SHELL AIR TEST	PASSED: ☐ FAILED: ☐	

SPECIAL TESTS PER ENGINEERING INSTRUCTION


FINAL INSPECTION TORQUE TESTS - ZERO PRESSURE			
INITIAL BREAK MAX.	FT-LBS.	RUNNING	6 FT-LBS.
ACTUAL	FT-LBS.	ACTUAL	14 FT-LBS.

DATE TESTED:	TESTED BY:	ACCEPTED BY:	CUSTOMER WITNESS BY:
9/5/25	J POTTS	MM	<i>[Signature]</i>

[Signature] 9-5-25


FILE NAME : HYDRO 2(SHELL) (073734) (09052025)
JOB# : H3600623
BODY HEAT# : AA271
COVER HEAT# : NA
BODY S/N : B96136
EMPLOYEE NAME : J POTTS
API S/N : 61 698884
MISC 1 : FLOWERVE
MISC 2 : 10 IN H2349 A SP

CHART START TIME (HHMMSS) : 71324
CHART START DATE (MMDDYYYY) 9052025
TEST START ELAPSED SECONDS : 169
TEST END ELAPSED SECONDS : 1069
CHART RECORD END ELAPSED SECONDS : 1107
CHART MAX LENGTH HOURS : 24
HIGH PRESSURE TRANSMITTERS WERE USED

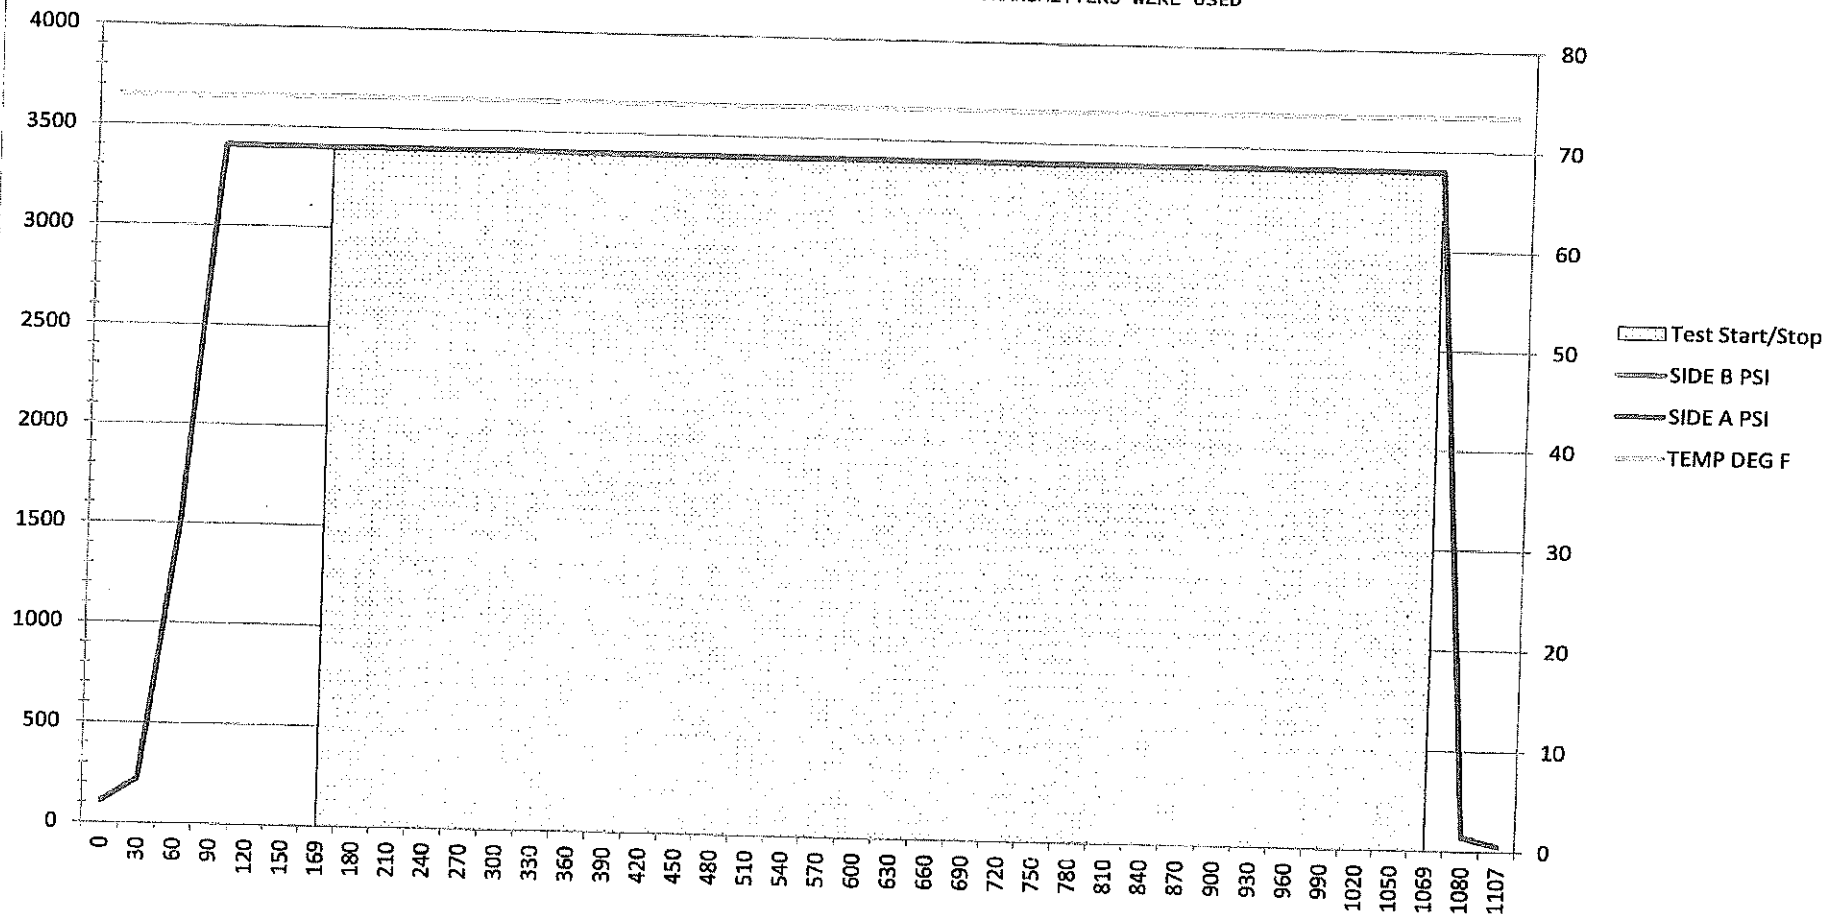


FILE NAME : HYDRO 2(B_HST)(075958)(09052025)
JOB# : H3600623
BODY HEAT# : AA27186
COVER HEAT# : NA
BODY S/N : B96136
EMPLOYEE NAME : J POTTS
API S/N : 61 698884
MISC 1 : FLOWERVE
MISC 2 : 10 IN H2349 A SP


CHART START TIME (HHMMSS) : 75037
CHART START DATE (MMDDYYYY) 9052025
TEST START ELAPSED SECONDS : 135
TEST END ELAPSED SECONDS : 435
CHART RECORD END ELAPSED SECONDS : 495
CHART MAX LENGTH HOURS : 24
HIGH PRESSURE TRANSMITTERS WERE USED

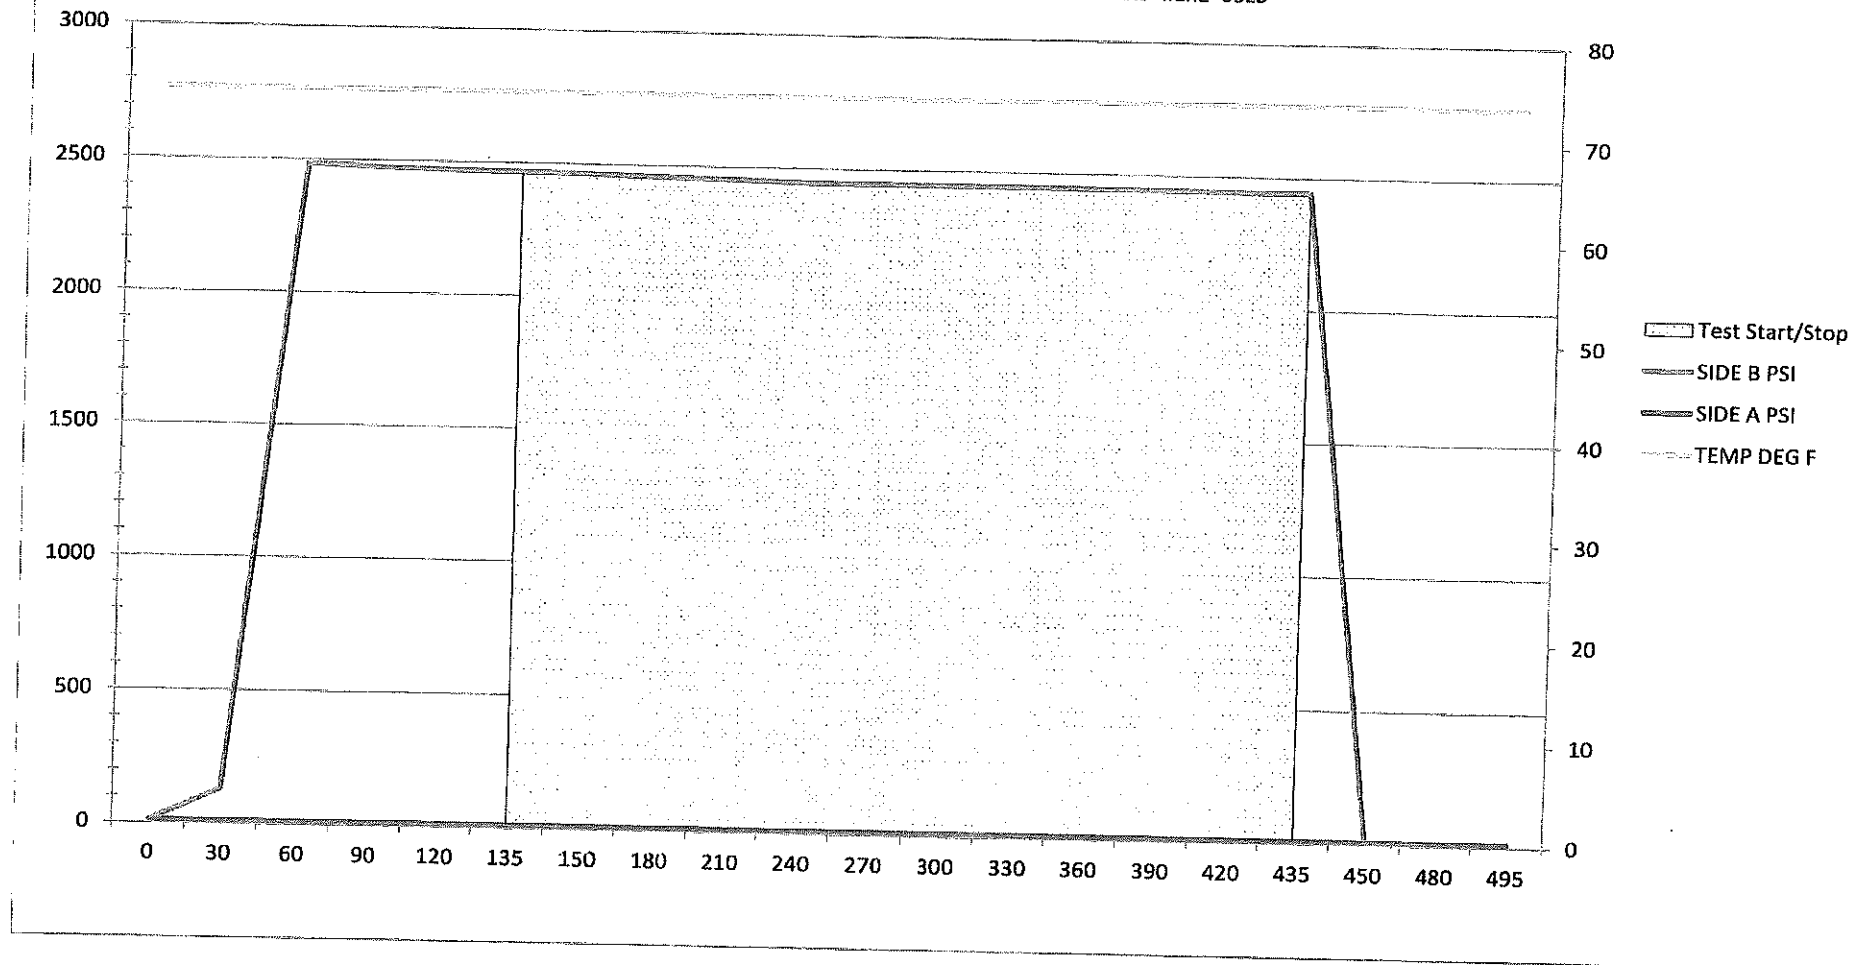

FILE NAME : HYDRO 2(A_HST)(075008)(09052025)
JOB# : H3600623
BODY HEAT# : AA27126
COVER HEAT# : NA
BODY S/N : 896136
EMPLOYEE NAME : J POTTS
API S/N : 61 698884
MISC 1 : FLOWSERVE
MISC 2 : 10 IN H2349 A SP

CHART START TIME (HHMMSS) : 74116
CHART START DATE (MMDDYYYY) 9052025
TEST START ELAPSED SECONDS : 160
TEST END ELAPSED SECONDS : 460
CHART RECORD END ELAPSED SECONDS : 520
CHART MAX LENGTH HOURS : 24
HIGH PRESSURE TRANSMITTERS WERE USED

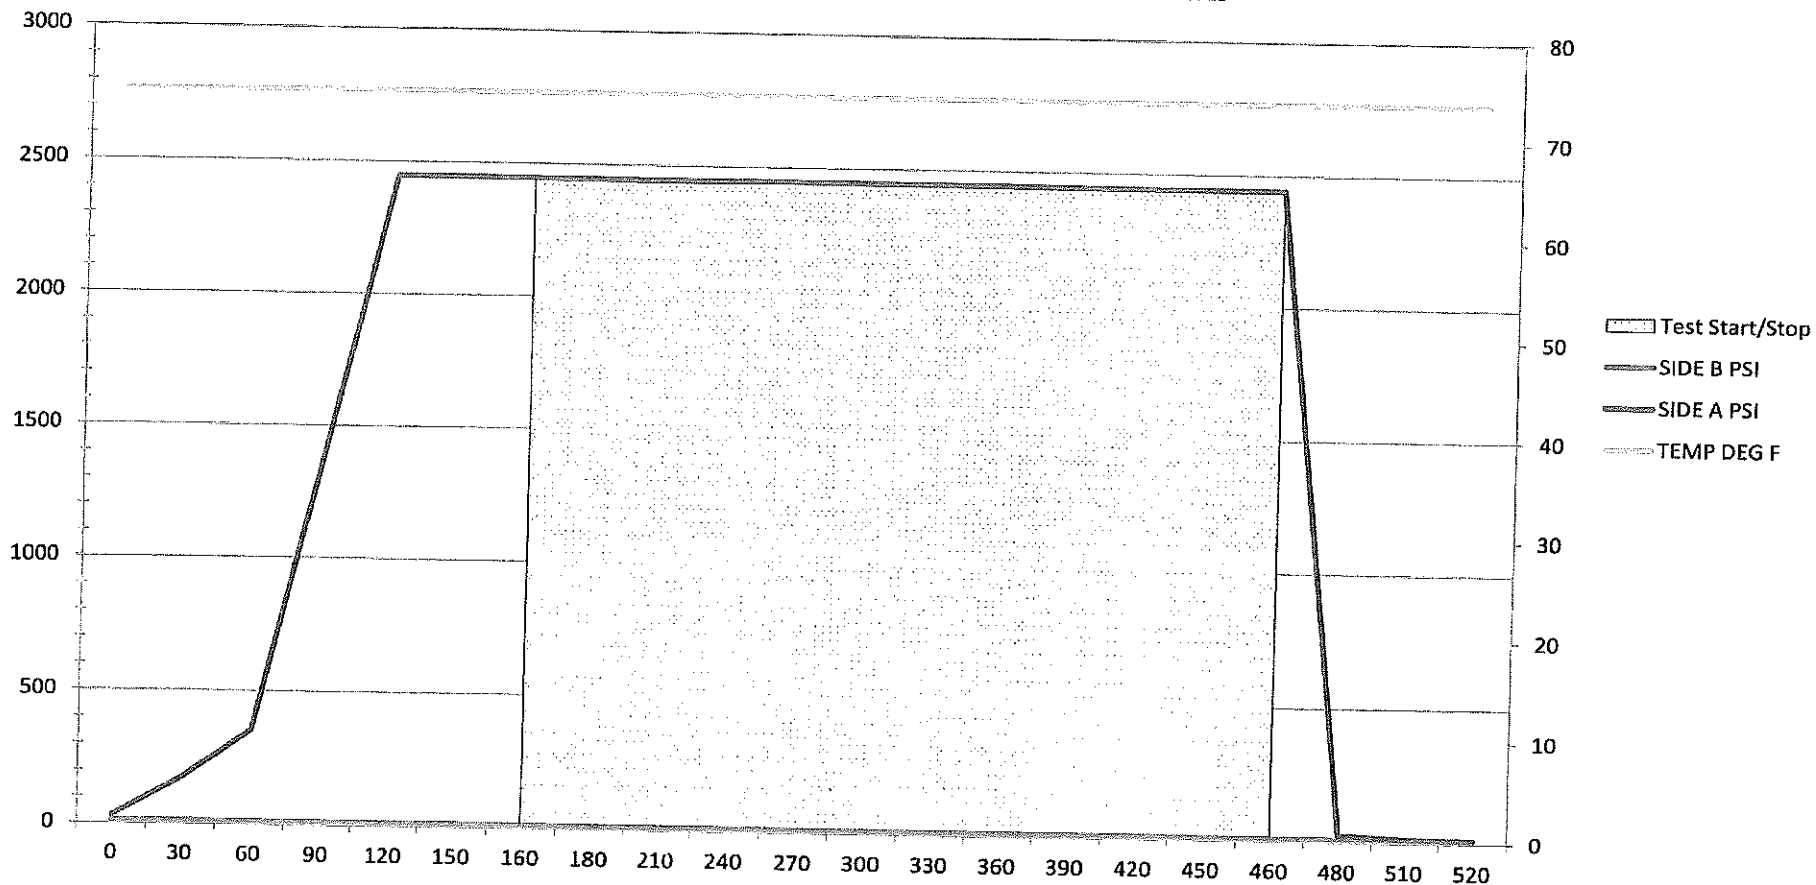



NAKODA ENGINEERS



TEST CERTIFICATE AS PER EN 10204 3.1

TC No.:	0454	Date: 23/05/2025		
Customer:	FLOWSERVE INDIA CONTROLS PRIVATE LIMITED	Purchase order ref:	10124208	Date: 18-03-2025
Material Specification & year of edition	ASTM A516 Gr.70	Invoice/Delivery challan ref:	NEB/0454/25-26	Date: 23-05-2025

PART DETAILS

Item Code	Size/Description	No. of Plates	Plate no.	Heat no.	Mill supplier	Mill TC reference
N122327	COVER MCD 10" CL 900 GR.70 FIG NO.2349		AB0			
		5		3224674	JINDAL STEEL & POWER LIMITED	0000006169

CHEMICAL ANALYSIS %

Specification value	C	S	P	Mn	Si	Cu	Ni	Cr	Mo	V	Cb	Ti	CE
Minimum	0.000	0.000	0.000	0.790	0.130	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Maximum	0.300	0.025	0.025	1.500	0.450	0.430	0.430	0.340	0.130	0.040	0.030	0.040	0.430
Mill TC value	0.160	0.004	0.021	1.380	0.270	0.035	0.011	0.098	0.006	0.001	0.016	0.013	0.410
Tested value	0.199	0.010	0.024	1.134	0.374	0.003	0.000	0.000	0.000	0.000	0.000	0.000	0.400

Chemical Test done at OMEGA INSPECTION & ANALYTICAL LABORATORY Lab TC ref: TC NO:OIAL/2025/04/00631 DATE:09.04.2025

MECHANICAL ANALYSIS

Specification value	Yield Strength @ 0.2% offset method	Tensile Strength	Elongation in 2"	RA	Hardness (BHN)	Impact at -50 Deg F Min: 27 Joules Single specimen; Avg : 27 Joules			
Minimum	38 Ksi (260 Mpa)	70 Ksi (485 Mpa)	21%						
Maximum	-	90 Ksi (620 Mpa)	-		233 (99 HRB)	1	2	3	Average
Mill TC value	54.82 Ksi (378 Mpa)	76.73 Ksi (529 Mpa)	35%		158				
Tested value	43.00 Ksi (297 Mpa)	76.00 Ksi (527 Mpa)	28%		81, 78, 79 (HRBW)	116	120	124	120
Mechanical Test done at	OMEGA INSPECTION & ANALYTICAL LABORATORY				TC NO:OIAL/2025/04/00631 DATE:09.04.2025				

Heat Treatment condition: Normalized at 910±10 C, Soaking time 1min/mm or 60min whichever is more & air cooled.

MARKING

The plates are marked as "A516 GR 70", "N122327" (3224674AB0).

The Material conforms to ASTM A516-17 Gr.70 , NACE MR0175-2021/ISO 15156-1:2020 and Flowserve Specification: RMC25024-REV.08/00.

We hereby certify that the items mentioned above have been Visually, Dimensionally Inspected, Tested and found to be in accordance with Specification requirements.

	Supplier/Client (RAGUL S)	Approved by Supplier/Quality Incharge (RAGUL S)	
REVIEWED / NOTED - SWATNESSO - P. Raghav RAGUL S			660



VEEYES ALLOYS - PLANT 2

ISO 9001:2015
04 100 000538

INSPECTION CERTIFICATE AS PER EN 10204:2004 Type 3.1

Customer : FLOWSERVE INDIA CONTROLS PVT LTD (NORDSTROM)
KANCHIPURAM 603 209

T.C. No : FD/AA2716/25
T.C.Date : 30/04/2025

P.Order : 10124314 Dt. 22/03/2025

Rev No : Dt:-

Heat No : AA2716
Pour Date : 16/04/2025

Specification : ASTM A216/A216M Gr WCC-2021 [UNS J02503]

CASTING PROCESSED BY ELECTRIC INDUCTION MELTING
FOUNDRY IDENTIFICATION : VSF

CHEMICAL COMPOSITION % (ASTM A731-2021)											
Element%	C	Mn	Si	P	S	Cr	Ni	Mo	Cu	V	#CE
Minimum	---	---	---	---	---	---	---	---	---	---	---
Maximum	0.230	1.20	0.600	0.025	0.020	0.500	0.500	0.200	0.300	0.030	0.420
Actual Value	0.210	1.02	0.430	0.020	0.007	0.070	0.060	0.010	0.010	0.009	0.401

#TRE	N	Al
---	---	---
1.00	0.015	0.080
0.159	0.008	0.054

HEAT TREATMENT : Normalizing - Heated to 920°C soaked for 4.00 hrs and air cooled

MECHANICAL PROPERTIES (ASTM A370-2024a)(Room temperature:22°C)									
Requirements	Yield Strength		Tensile Strength		% Elongation	% Reduction	Hardness	Bend Test	Impact Test in (J)
	Kg/1mm ²	Ksi	Kg/1mm ²	Ksi	GL:50 mm	In Area	HBW	At 90° D=11	Size : (10mm X 10mm X 55mm)
Minimum	28.04	40	49.46	70	22	35	---	-	-
Maximum	---	---	66.79	95	---	---	233	-	1
Actual Value	34.98	50	52.82	75	35.72	62.33	152.153,153 AVG:153	Passed	2

3	Avg
---	---

ITEM DESCRIPTION

SL.No.	Description	Drawing No.	Part No.	Pour Sl. No.	Quantity
1	10" CL 900 FL BODY [F.NO.2349]	122717 / REV.15	N122717WCC	1, 2	2

RECEIVED / NOTED
SUBMITTED
P. R. SATHYANARAYANA
R. RAJATH

VEEYES ALLOYS PRIVATE LIMITED
603

Remarks : Visual inspection as per MSS SP-55-2011, level of Type II-XII a found Satisfactory.
No surface irregularities to Type I found, surface irregularities to Type II-XII do not exceed example "a"
#CE = C+Mn/6+Cr+Mo+V/5+Ni+Cu/15 & *TRE = Cr+Ni+Mo+Cu+V.
This Material conforms to NACE MR0175-2021/ ISO15156-2-2020, FTTDC001R8 & Material Spec No:RMC90012-Rev15 Requirements.
Carbon steel fully killed & fine grained condition. The castings are free from radioactive contamination / radiation.
QA system have undergone Specific Assessment of Materials according to Annex-1, Clause 4.3 of PED/2014/68/ EU
Certified By TUV Nord Vide Certificate No:0045/202/WZ/1291/24/Rev.1 Valid till May 2027.

We Conform that the above material was manufactured, sampled, tested and inspected in accordance with the drawings, customer order requirements, material specification ASTM A216/A216M Gr WCC-2021 [UNS J02503] and was found to meet the requirements & released for dispatch.

S. Paul
S. Balasubramanian
Sr. Chemist
Prepared by

M. Jayakumar
Manager QA/QC
Approved by

