



Monday Sep-08-2025

Flowserve Facility:

Flowserve Nordstrom / Valbart Valves
1511 Jefferson St.
Sulphur Springs, TX 75482

To:

cmtrs@flowserve.com

CERTIFICATE OF CONFORMANCE

SERIAL #	HEAT #	PO #	Description	Valve Type	Class	End Connection
61-698884	698884	662668300	10" 2349 A SP	PLUG	900	FLG
61-698884	3224674AB0	662668300	10" 2349 A SP	PLUG	900	FLG
61-698884	AA2716	662668300	10" 2349 A SP	PLUG	900	FLG
61-698885	698885	662668300	10" 2349 A SP	PLUG	900	FLG
61-698885	3224674AB0	662668300	10" 2349 A SP	PLUG	900	FLG
61-698885	AA2717	662668300	10" 2349 A SP	PLUG	900	FLG
61-698886	698886	662668300	10" 2349 A SP	PLUG	900	FLG
61-698886	3224674AB0	662668300	10" 2349 A SP	PLUG	900	FLG
61-698886	AA2716	662668300	10" 2349 A SP	PLUG	900	FLG
61-698887	698887	662668300	10" 2349 A SP	PLUG	900	FLG
61-698887	3224674AB0	662668300	10" 2349 A SP	PLUG	900	FLG
61-698887	V7557	662668300	10" 2349 A SP	PLUG	900	FLG

We hereby certify that all the subject valves/parts/sealant have been manufactured in conformance with the applicable requirements of Flowserve Sulphur Springs Operation (FSSO) specifications and that the valve/parts/sealant materials for component parts meet the applicable requirements of FSSO drawings and ASTM specifications, ASME B16.34 (if Applicable), API Q1 10th edition, and API 6D 25th edition (if applicable to the API monogram). Flowserve Dynamic Balanced Valves are provided with a Pressure balance feature unless specifically identified in the Valve description. All valves/parts/sealant meet all the requirements of the customer purchase order.

Documentation Technician
Justin McKee



SULPHUR SPRINGS OPERATION
PLUG VALVE TEST RECORD

SIZE: 10	PRESSURE: 900	API SERIAL NO.:	6-1-698886
FIGURE NUMBER: H2349 A SP		MMN SERIAL NO.: B96257	
BM NO.: F01700482		BODY SERIAL NO.:	
ASSEMBLY ORDER NO.: H3600623		BODY HEAT NO.: AA2716	
		BODY RADIOGRAPH NO.: X	
		COVER HEAT NO.: 3224674AB0	
VALVE TESTED PER RMP: 61196		STEM JOB NO.: X	
	REV: 19	PLUG JOB NO.: X	
E.I. DRAWING NO.: 21700482		TYPE OF OPERATOR: OHM-TECH	
		SEALANT: 950	

	OPERATION	SHELL	SEAT
TEST PRESSURES, PSIG	2250	3400	2445
TEST DURATION TIME, MIN.		15	5

TEST RESULTS		ACCEPTANCE
SHELL HYDROSTATIC TEST	PASSED: ☒ FAILED: ☐	NO LEAKAGE
PRESS. GAUGE RANGE & ID. No.	HYDRO-2	
DIFFERENTIAL PRESSURE TORQUE	AA= SEAT 18 FT-LBS. AB= SEAT 17 FT-LBS.	MAX: 27
SEAT HYDROSTATIC	AA= SEAT PASSED: ☒ FAILED: ☐ AB= SEAT PASSED: ☒ FAILED: ☐	NO LEAKAGE
PRESS. GAUGE RANGE & ID. No.	HYDRO-2	
SEAT AIR (IF SPECIFIED)	AA= SEAT PASSED: ☐ FAILED: ☐ AB= SEAT PASSED: ☐ FAILED: ☐	NO LEAKAGE
PRESS. GAUGE RANGE & ID. No.		
SHELL AIR TEST	PASSED: ☐ FAILED: ☐	


SPECIAL TESTS PER ENGINEERING INSTRUCTION

FINAL INSPECTION TORQUE TESTS - ZERO PRESSURE			
INITIAL BREAK MAX.	FT-LBS.	RUNNING	FT-LBS.
ACTUAL	FT-LBS.	ACTUAL	FT-LBS.
		4	

DATE TESTED:	TESTED BY:	ACCEPTED BY:	CUSTOMER WITNESS BY:
9/5/25	J POTTS	W	<i>Signatures</i>


FILE NAME : HYDRO 2(SHELL) (091946) (09052025)
JOB# : H3600623
BODY HEAT# : AA2716
COVER HEAT# : NA
BODY S/N : B96257
EMPLOYEE NAME : J POTTS
API S/N : 61 698886
MISC 1 : FLOWSERVE
MISC 2 : 10 IN H2349 A SP

CHART START TIME (HHMMSS) : 90043
CHART START DATE (MMDDYYYY) 9052025
TEST START ELAPSED SECONDS : 161
TEST END ELAPSED SECONDS : 1061
CHART RECORD END ELAPSED SECONDS : 1121
CHART MAX LENGTH HOURS : 24
HIGH PRESSURE TRANSMITTERS WERE USED

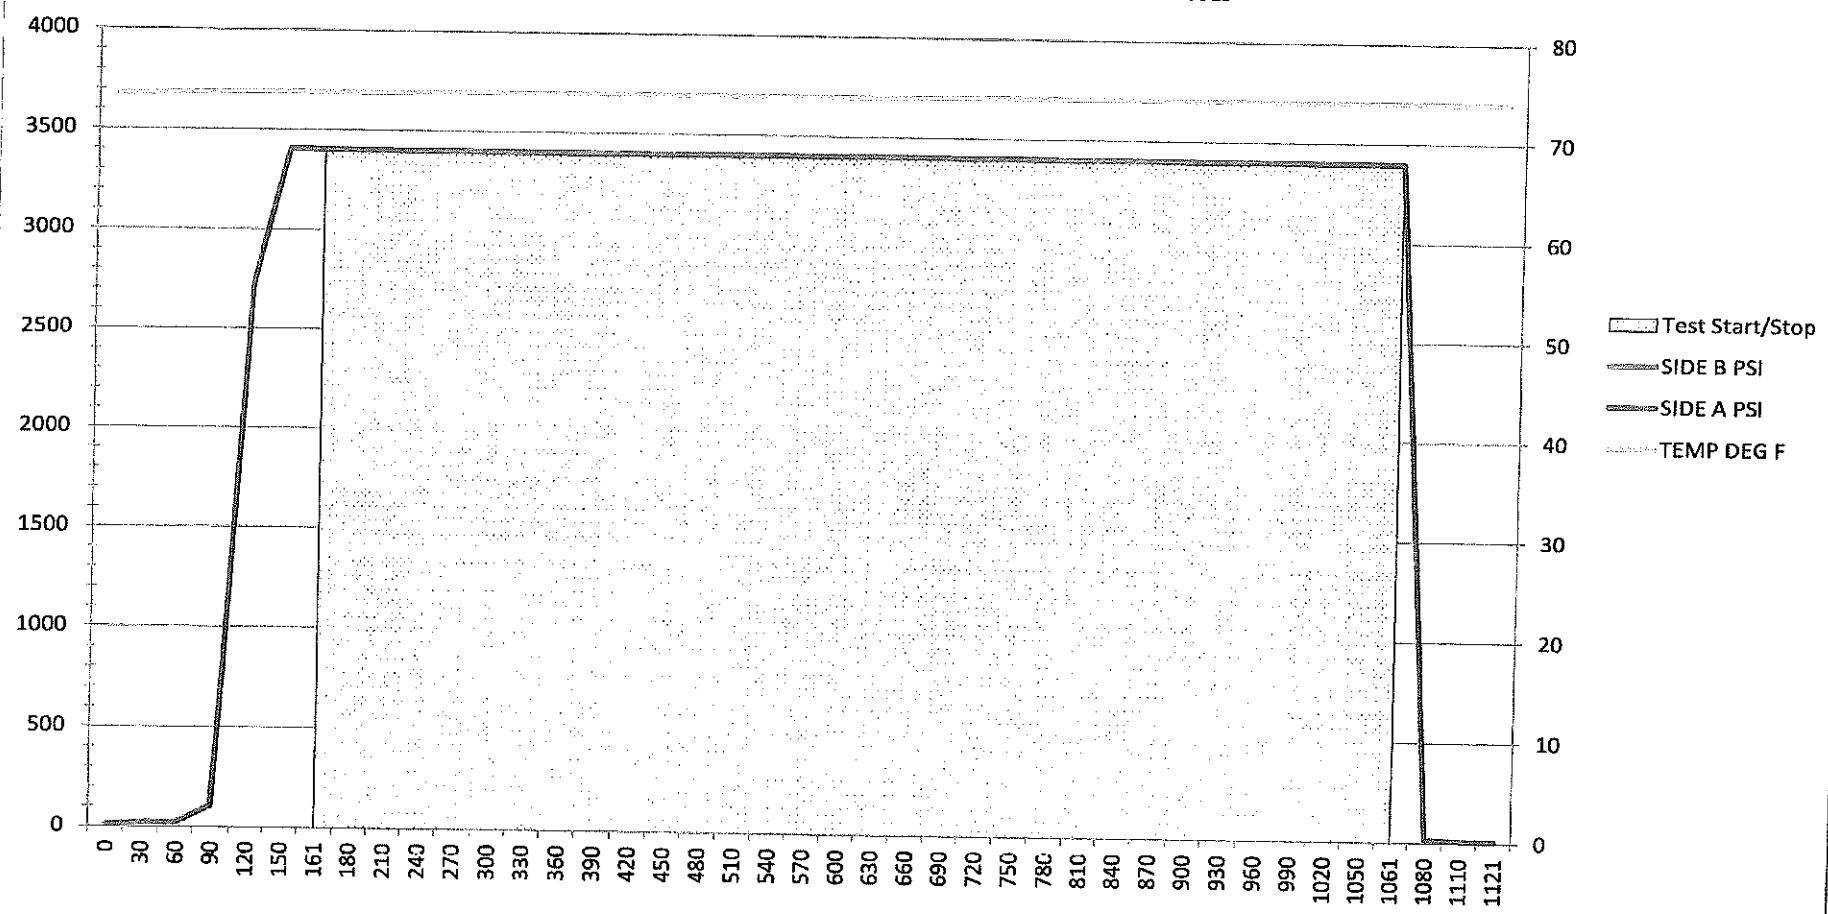


FILE NAME : HYDRO 2(A_HST) (092837) (09052025)
JOB# : H3600623
BODY HEAT# : AA2716
COVER HEAT# : NA
BODY S/N : B96257
EMPLOYEE NAME : J POTTS
API S/N : 61 698886
MISC 1 : FLOWSERVE
MISC 2 : 10 IN H2349 A SP


CHART START TIME (HHMMSS) : 92047
CHART START DATE (MMDDYYYY) 9052025
TEST START ELAPSED SECONDS : 108
TEST END ELAPSED SECONDS : 408
CHART RECORD END ELAPSED SECONDS : 468
CHART MAX LENGTH HOURS : 24
HIGH PRESSURE TRANSMITTERS WERE USED

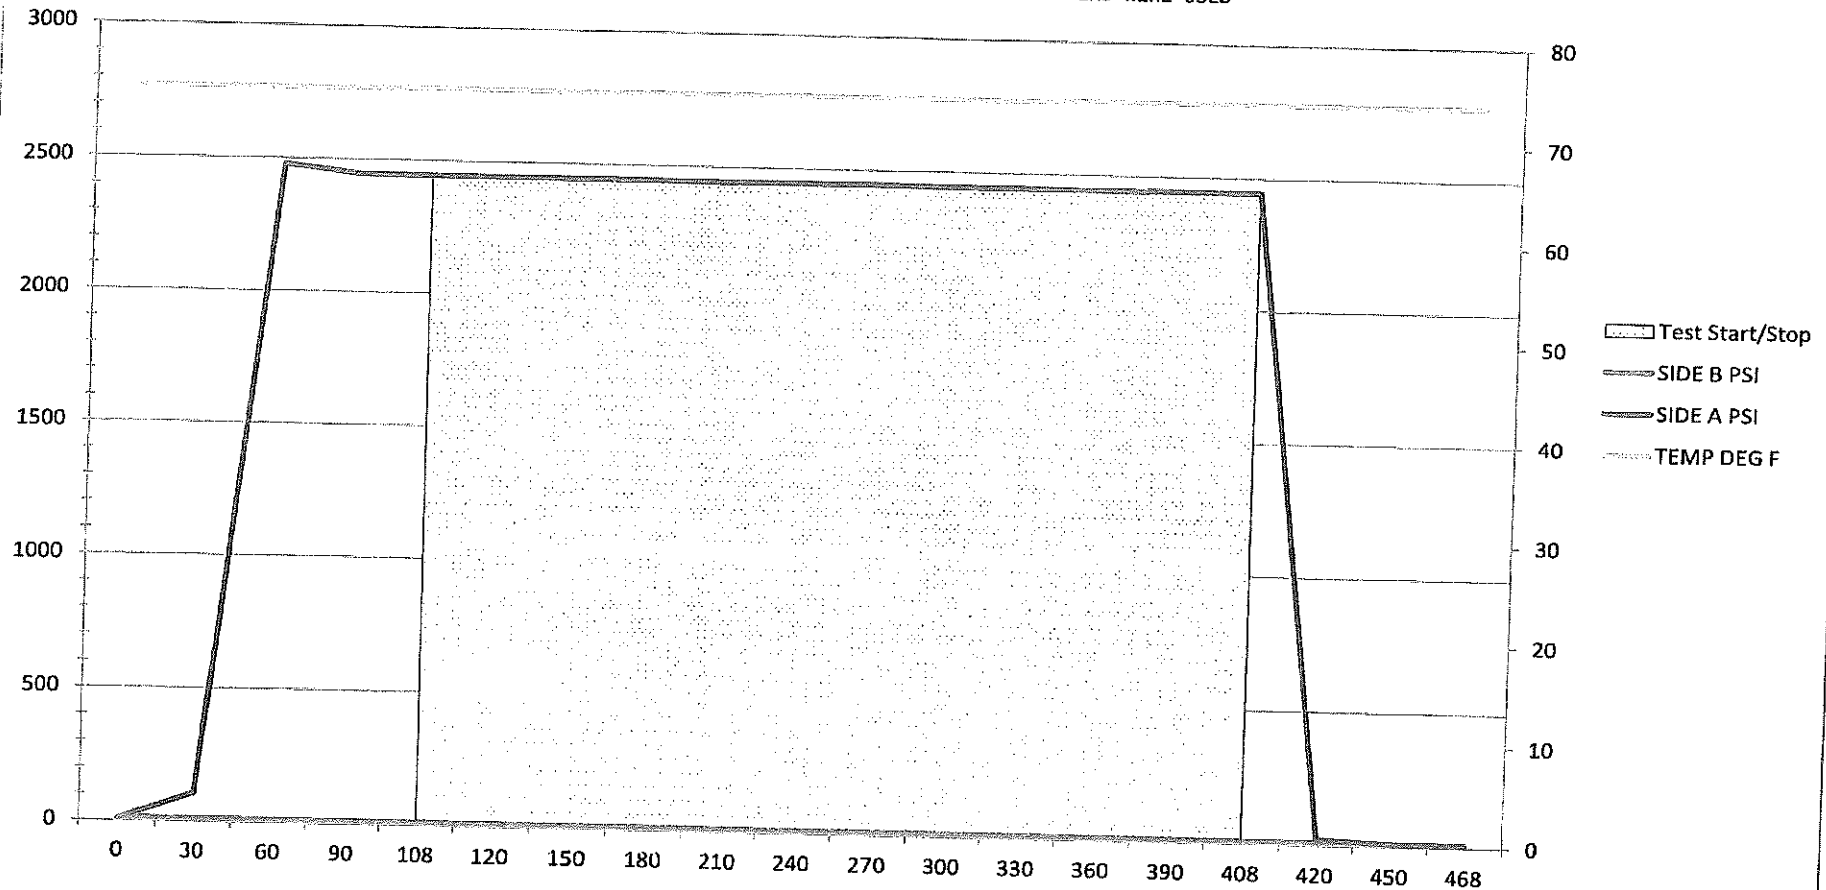

FILE NAME : HYDRO 2(B_HST) (093624) (09052025)
JOB# : H3600623
BODY HEAT# : AA2716
COVER HEAT# : NA
BODY S/N : B96257
EMPLOYEE NAME : J POTTS
API S/N : 61 698886
MISC 1 : FLOWSERVE
MISC 2 : 10 IN H2349 A SP

CHART START TIME (HHMMSS) : 92856
CHART START DATE (MMDDYYYY) 9052025
TEST START ELAPSED SECONDS : 87
TEST END ELAPSED SECONDS : 387
CHART RECORD END ELAPSED SECONDS : 447
CHART MAX LENGTH HOURS : 24
HIGH PRESSURE TRANSMITTERS WERE USED

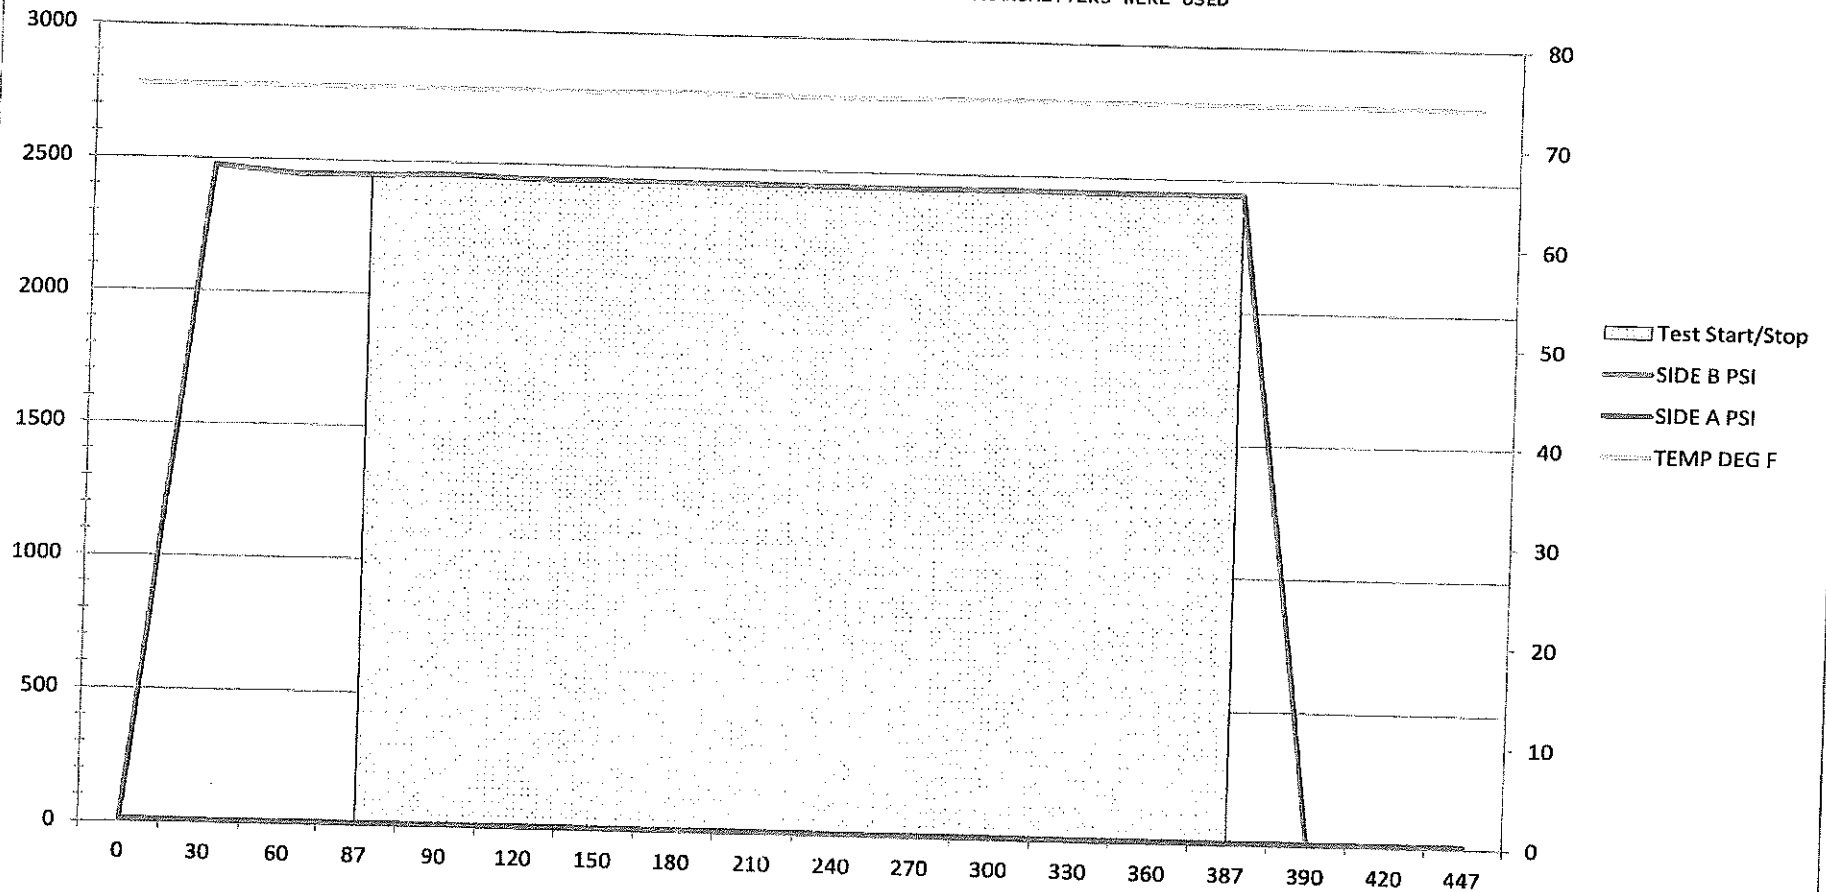



NAKODA ENGINEERS



TEST CERTIFICATE AS PER EN 10204 3.1

TC No.:	0454	Date: 23/05/2025	
Customer:	FLOWSERVE INDIA CONTROLS PRIVATE LIMITED	Purchase order ref:	10124208
Material Specification & year of edition	ASTM A516 Gr.70	Invoice/Delivery challan ref:	NEB/0454/25-26
		Date:	23-05-2025

PART DETAILS

Item Code	Size/Description	No. of Plates	Plate no.	Heat no.	Mill supplier	Mill TC reference
N122327	COVER MCD 10" CL 900 GR.70 FIG NO.2349	5	ASB	3224674	JINDAL STEEL & POWER LIMITED	0000006169

CHEMICAL ANALYSIS %

Specification value	C	S	P	Mn	Si	Cu	Ni	Cr	Mo	V	Cb	Ti	CE
Minimum	0.000	0.000	0.000	0.790	0.130	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Maximum	0.300	0.025	0.025	1.500	0.450	0.430	0.430	0.340	0.130	0.040	0.030	0.040	0.430
Mill TC value	0.160	0.004	0.021	1.380	0.270	0.035	0.011	0.098	0.006	0.001	0.016	0.013	0.410
Tested value	0.199	0.010	0.024	1.134	0.374	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.400

Chemical Test done at OMEGA INSPECTION & ANALYTICAL LABORATORY Lab TC ref: TC NO:OIAL/2025/04/00631 DATE:09.04.2025

MECHANICAL ANALYSIS

Specification value	Yield Strength @ 0.2% offset method	Tensile Strength	Elongation in 2"	RA	Hardness (BHN)	Impact at -50 Deg F Min: 27 Joules Single specimen ; Avg : 27 Joules			
Minimum	38 KSI (260 Mpa)	70 KSI (485 Mpa)	21%						
Maximum	-	90 KSI (620 Mpa)	-		233 (99 HRB)	1	2	3	Average
Mill TC value	54.82 KSI (378 Mpa)	76.73 KSI (529 Mpa)	35%		155	116	120	124	120
Tested value	43.00 KSI (297 Mpa)	76.00 KSI (527 Mpa)	28%		81, 78, 79 (HRBW)				

Mechanical Test done at OMEGA INSPECTION & ANALYTICAL LABORATORY TC NO:OIAL/2025/04/00631 DATE:09.04.2025

Heat Treatment condition: Normalized at 910±10°C, Soaking time 1min/m or 60min whichever is more & air cooled.

MARKING

The plates are marked as "A516 GR 70", "N122327" (3224674AB0).

The Material conforms to ASTM A516-17 Gr.70, NACE MR0175-2021/ISO 15156-1:2020 and Flowserve Specification: RMC25024-REV.08/00.

We hereby certify that the items mentioned above have been Visually, Dimensionally Inspected, Tested and found to be in accordance with Specification requirements.

	Supplier/Client (RAGUL S)
	Approved by Supplier/Client Incharge (RAGUL S)
	REVIEWED / NOTED - SWITNESSED - P. R. SIVANANDAN 660

