



Monday Sep-08-2025

Flowserve Facility:

Flowserve Nordstrom / Valbart Valves
1511 Jefferson St.
Sulphur Springs, TX 75482

To:

cmtrs@flowserve.com

CERTIFICATE OF CONFORMANCE

SERIAL #	HEAT #	PO #	Description	Valve Type	Class	End Connection
61-698884	698884	662668300	10" 2349 A SP	PLUG	900	FLG
61-698884	3224674AB0	662668300	10" 2349 A SP	PLUG	900	FLG
61-698884	AA2716	662668300	10" 2349 A SP	PLUG	900	FLG
61-698885	698885	662668300	10" 2349 A SP	PLUG	900	FLG
61-698885	3224674AB0	662668300	10" 2349 A SP	PLUG	900	FLG
61-698885	AA2717	662668300	10" 2349 A SP	PLUG	900	FLG
61-698886	698886	662668300	10" 2349 A SP	PLUG	900	FLG
61-698886	3224674AB0	662668300	10" 2349 A SP	PLUG	900	FLG
61-698886	AA2716	662668300	10" 2349 A SP	PLUG	900	FLG
61-698887	698887	662668300	10" 2349 A SP	PLUG	900	FLG
61-698887	3224674AB0	662668300	10" 2349 A SP	PLUG	900	FLG
61-698887	V7557	662668300	10" 2349 A SP	PLUG	900	FLG

We hereby certify that all the subject valves/parts/sealant have been manufactured in conformance with the applicable requirements of Flowserve Sulphur Springs Operation (FSSO) specifications and that the valve/parts/sealant materials for component parts meet the applicable requirements of FSSO drawings and ASTM specifications, ASME B16.34 (if Applicable), API Q1 10th edition, and API 6D 25th edition (if applicable to the API monogram). Flowserve Dynamic Balanced Valves are provided with a Pressure balance feature unless specifically identified in the Valve description. All valves/parts/sealant meet all the requirements of the customer purchase order.

Documentation Technician
Justin McKee



SULPHUR SPRINGS OPERATION
PLUG VALVE TEST RECORD

SIZE: 10	PRESSURE: 900
FIGURE NUMBER: H2349 A SP	
B/M NO.: F01700482	
ASSEMBLY ORDER NO.: H3600623	

VALVE TESTED PER RMP: 61196
REV: 19
E.I DRAWING NO.: 21700482

API SERIAL NO.:	61-698887
MMN SERIAL NO.:	B96138
BODY SERIAL NO.:	
BODY HEAT NO.:	V7557
BODY RADIOGRAPH NO.:	X
COVER HEAT NO.:	3224674AB0
STEM JOB NO.:	X
PLUG JOB NO.:	X
TYPE OF OPERATOR:	OHM-TECH
SEALANT:	950

TEST PRESSURES, PSIG	OPERATION	SHELL	SEAT
2250		3400	2445
TEST DURATION TIME, MIN.		15	5

TEST RESULTS		ACCEPTANCE
SHELL HYDROSTATIC TEST		
PRESS. GAUGE RANGE & ID. No.	PASSED: ☒ FAILED: ☐	NO LEAKAGE
HYDRO-2		
DIFFERENTIAL PRESSURE TORQUE		
AA= SEAT	17 FT-LBS.	MAX: 27
AB= SEAT	19 FT-LBS.	
SEAT HYDROSTATIC		
AA= SEAT	PASSED: ☒ FAILED: ☐	NO LEAKAGE
AB= SEAT	PASSED: ☒ FAILED: ☐	
PRESS. GAUGE RANGE & ID. No.		
HYDRO-2		
SEAT AIR (IF SPECIFIED)	AA= SEAT PASSED: ☐ FAILED: ☐	NO LEAKAGE
	AB= SEAT PASSED: ☐ FAILED: ☐	
PRESS. GAUGE RANGE & ID. No.		
SHELL AIR TEST		
PASSED: ☐ FAILED: ☐		

SPECIAL TESTS PER ENGINEERING INSTRUCTION


FINAL INSPECTION TORQUE TESTS - ZERO PRESSURE			
INITIAL BREAK MAX.	FT-LBS.	RUNNING	6 FT-LBS.
ACTUAL	FT-LBS.	ACTUAL	4 FT-LBS.

DATE TESTED:	TESTED BY:	ACCEPTED BY:	CUSTOMER WITNESS BY:
9/5/25	J POTTS	MM	<i>[Signature]</i>

[Signature] 9-5-25


FILE NAME : HYDRO 2(B_HST) (103257) (09052025)
JOB# : H3600623
BODY HEAT# : V7557
COVER HEAT# : NA
BODY S/N : 896138
EMPLOYEE NAME : J POTTS
API S/N : 61 698887
MISC 1 : FLOWSERVE
MISC 2 : 10 IN H2349 A SP

CHART START TIME (HHMMSS) : 102314
CHART START DATE (MMDDYYYY) 9052025
TEST START ELAPSED SECONDS : 137
TEST END ELAPSED SECONDS : 437
CHART RECORD END ELAPSED SECONDS : 497
CHART MAX LENGTH HOURS : 24
HIGH PRESSURE TRANSMITTERS WERE USED

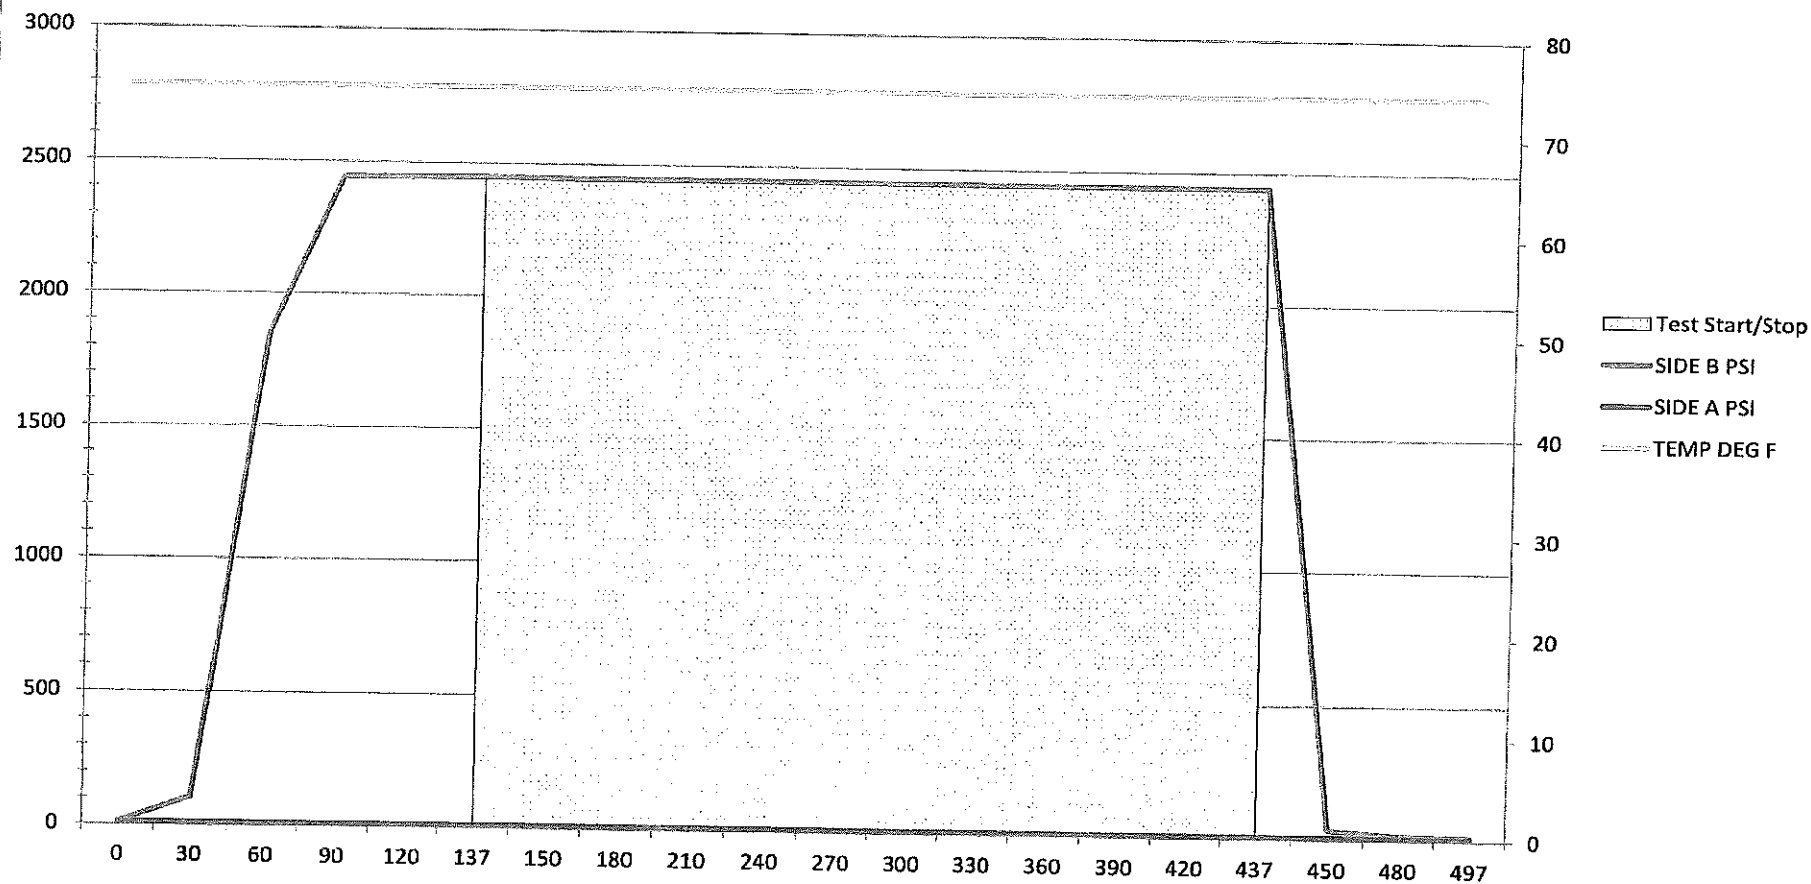


FILE NAME : HYDRO 2(A_HST)(101902)(09052025)
JOB# : H3600623
BODY HEAT# : V7557
COVER HEAT# : NA
BODY S/N : B96138
EMPLOYEE NAME : J POTTS
API S/N : 61 698887
MISC 1 : FLOWSERVE
MISC 2 : 10 IN H2349 A SP


CHART START TIME (HHMMSS) : 100959
CHART START DATE (MMDDYYYY) 9052025
TEST START ELAPSED SECONDS : 176
TEST END ELAPSED SECONDS : 476
CHART RECORD END ELAPSED SECONDS : 536
CHART MAX LENGTH HOURS : 24
HIGH PRESSURE TRANSMITTERS WERE USED

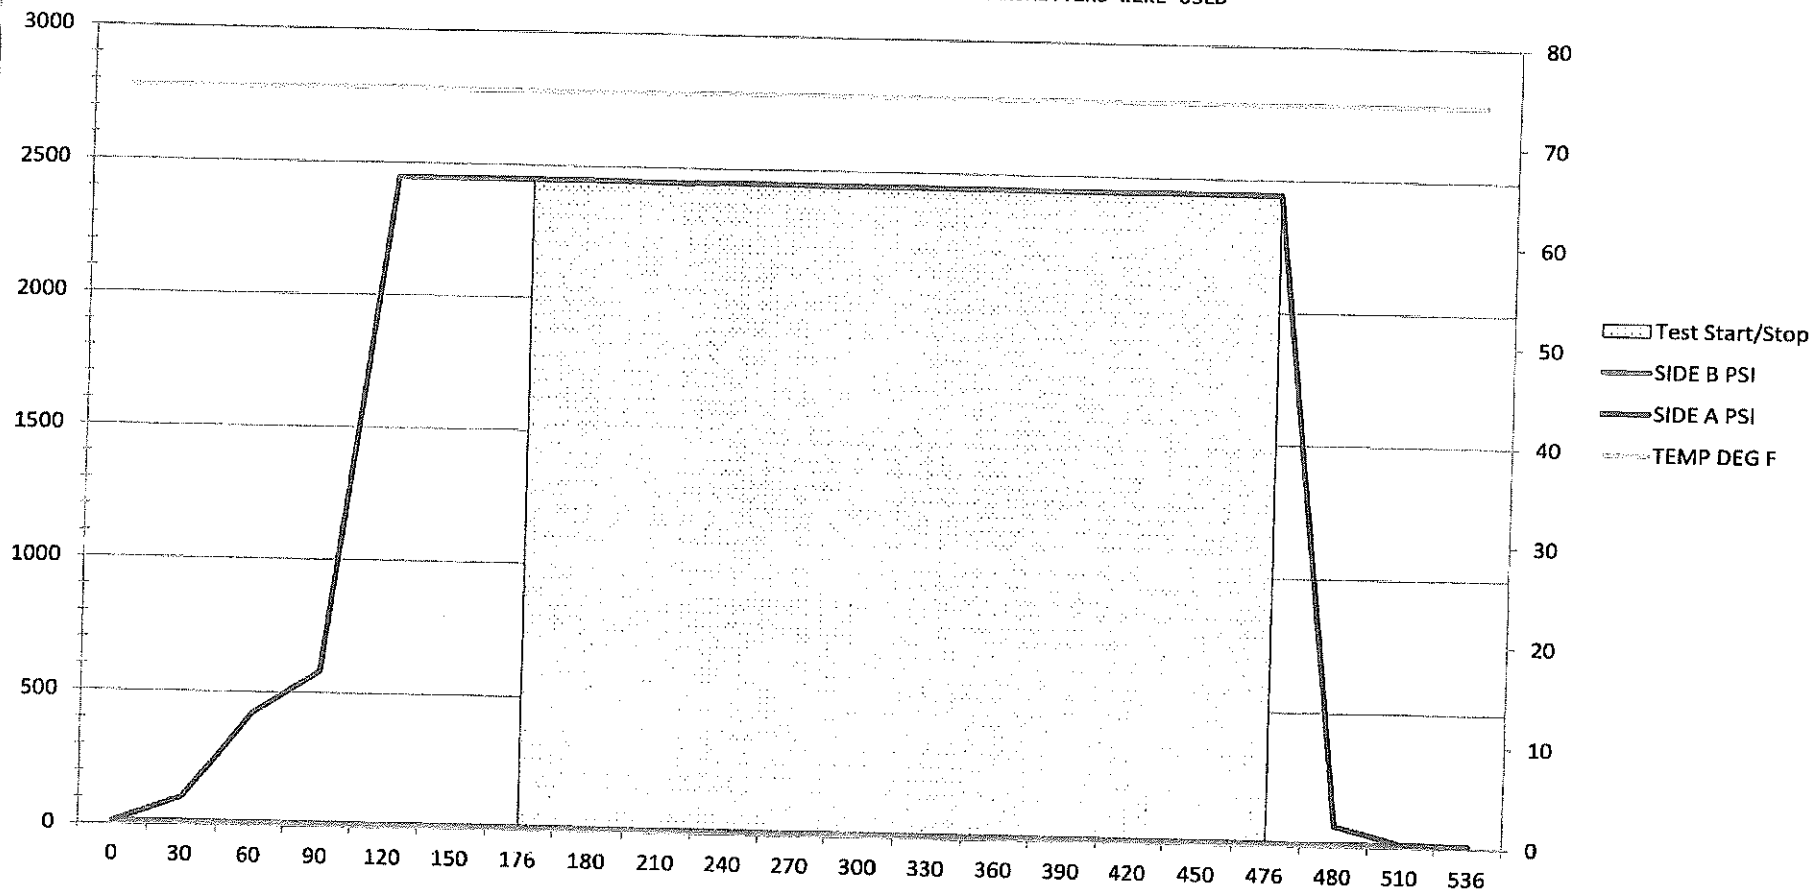

FILE NAME : HYDRO 2(SHELL) (100941) (09052025)
JOB# : H3600623
BODY HEAT# : V7557
COVER HEAT# : NA
BODY S/N : B96138
EMPLOYEE NAME : J POTTS
API S/N : 61 698887
MISC 1 : FLOWSERVE
MISC 2 : 1.0 IN H2349 A SP

CHART START TIME (HHMMSS) : 94938
CHART START DATE (MMDDYYYY) 9052025
TEST START ELAPSED SECONDS : 190
TEST END ELAPSED SECONDS : 1090
CHART RECORD END ELAPSED SECONDS : 1150
CHART MAX LENGTH HOURS : 24
HIGH PRESSURE TRANSMITTERS WERE USED

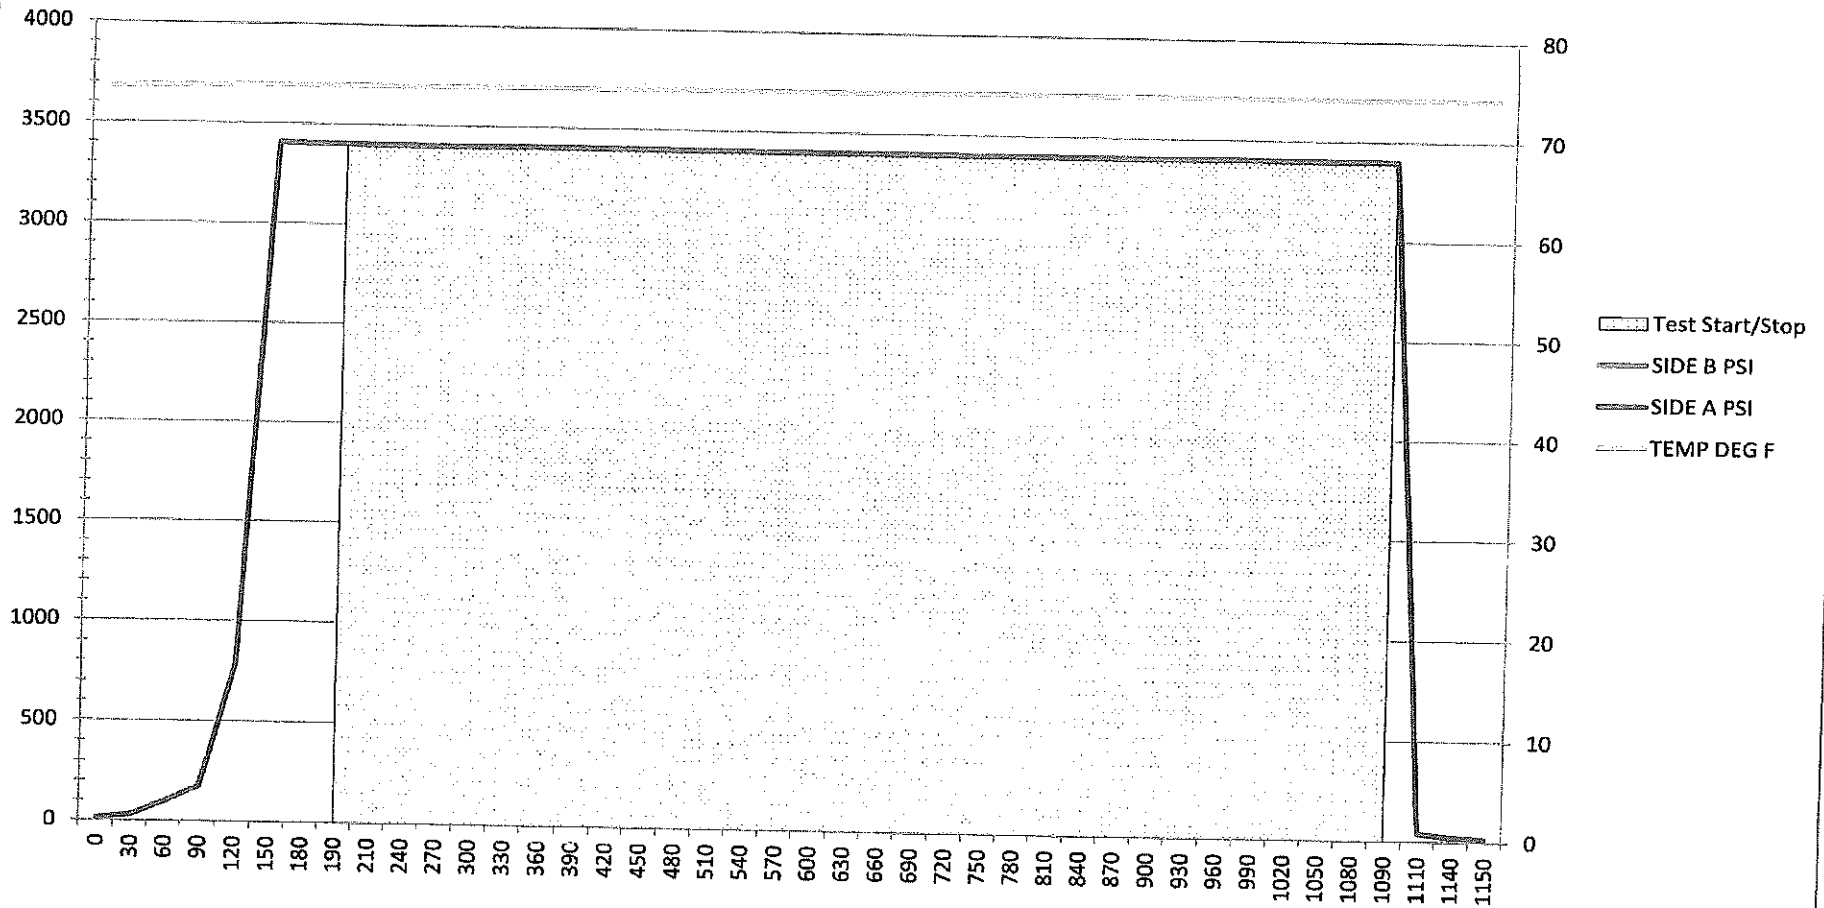



NAKODA ENGINEERS



TEST CERTIFICATE AS PER EN 10204 3.1

TC No.:	0454	Date: 23/05/2025		
Customer:	FLOWERVE INDIA CONTROLS PRIVATE LIMITED	Purchase order ref:	10124208	Date: 18-03-2025
Material Specification & year of edition	ASTM A516 Gr. 70	Invoice/Delivery challan ref:	NEB/0454/25-26	Date: 23-05-2025

PART DETAILS

Item Code	Size/Description	No. of Plates	Plate no.	Heat no.	Mill supplier	Mill TC reference
N122327	COVER MCD 10" CL 900 GR. 70 FIG NO.2349	5	AB0	3224674	JINDAL STEEL & POWER LIMITED	0000006169

CHEMICAL ANALYSIS %

Specification value	C	S	P	Mn	Si	Cu	Ni	Cr	Mo	V	Cb	Ti	CE
Minimum	0.000	0.000	0.000	0.790	0.130	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Maximum	0.300	0.025	0.025	1.500	0.450	0.430	0.430	0.340	0.130	0.040	0.030	0.040	0.430
Mill TC value	0.160	0.004	0.021	1.380	0.270	0.035	0.011	0.098	0.006	0.001	0.016	0.013	0.410
Tested value	0.199	0.010	0.024	1.134	0.374	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.400

Chemical Test done at

OMEGA INSPECTION & ANALYTICAL LABORATORY

Lab TC ref:

TC NO:OIAL/2025/04/00631 DATE:09.04.2025

MECHANICAL ANALYSIS

Specification value	Yield Strength @ 0.2% offset method	Tensile Strength	Elongation in 2"	RA	Hardness (BHN)	Impact at -50 Deg F Min: 27 Joules Single Specimen : Avg : 27 Joules			
Minimum	38 Ksi (260 Mpa)	70 Ksi (485 Mpa)	21%		-				
Maximum	-	90 Ksi (620 Mpa)	-		233 (99 HRB)	1	2	3	Average
Mill TC value	54.82 Ksi (378 Mpa)	76.73 Ksi (529 Mpa)	35%		156				
Tested value	43.00 Ksi (297 Mpa)	76.00 Ksi (527 Mpa)	28%		81, 78, 79 (HRBW)	116	120	124	120

Mechanical Test done at

OMEGA INSPECTION & ANALYTICAL LABORATORY

TC NO:OIAL/2025/04/00631 DATE:09.04.2025

Heat Treatment condition: Normalized at 910±10°C, Soaking time 1min/mm or 60min whichever is more & air cooled.

MARKING

The plates are marked as "A516 GR 70", "N122327" (3224674AB0).

The Material conforms to ASTM A516-17 Gr.70, NACE MR0175-2021/ISO 15156-1:2020 and Flowserve Specification: RMC25024-REV.08/00.


We hereby certify that the items mentioned above have been Visually, Dimensionally Inspected, Tested and found to be in accordance with Specification requirements.



Supplier: Cymity (RAGUL S)



Approved by Supplier Quality Incharge (RAGUL S)

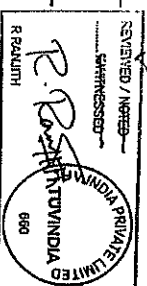



VEEYES FOUNDRY

ISO 9001:2015
04 100 000538

INSPECTION CERTIFICATE

AS PER EN 10204 3.1

Customer : FLOWSERVE INDIA CONTROLS PVT LTD (NORDSTROM)
KANCHIPURAM 603 209

T.C. No : FDN/7557/23
T.C. Date : 12/05/2023

P.Order : 10110758 Dt. 04/04/2023

Rev No : - Dt -

Specification : ASTM A216/A216M Gr WCC-2021 [UNS J02503]

Heat No : V7557
Pour Date : 17/04/2023

CASTING PROCESSED BY INDUCTION MELTING
FOUNDRY IDENTIFICATION : VSF

CHEMICAL COMPOSITION %

Element%	C	Mn	Si	P	S	Cr	Ni	Mo	Cu	V	#CE	*TRE	N	Al
Minimum	---	---	---	---	---	---	---	---	---	---	---	---	---	---
Maximum	0.230	1.20	0.600	0.025	0.020	0.500	0.500	0.200	0.300	0.030	0.420	1.00	0.015	0.080
Actual Value	0.200	1.04	0.450	0.016	0.008	0.060	0.030	0.010	0.010	0.006	0.390	0.116	0.007	0.054

HEAT TREATMENT : Normalizing : Heated to 920°C Soaked for 4.00 hrs and air cooled.

MECHANICAL PROPERTIES (ASTM A370-2022) (Room temperature:22°C)

Requirments	Yield Strength Kgf/mm ²	Ksi	Tensile Strength Kgf/mm ²	Ksi	% Elongation GL: 50 mm	% Reduction In Area	Hardness HBW	Bend Test AT 90° D=11	Impact Test in J Size : (10mm X 10mm X 55mm)
	0.2 % Rp		-		-	-	ASTM E10-2018		
Minimum	28.04	40	49.46	70	22	35	---	-	
Maximum	---	---	66.79	95	---	---	233	-	1 2 3 Avg
Actual Value	34.06	48	53.54	76	34.92	62.13	155 153 155 AVG:154	Passed	- - -

ITEM DESCRIPTION

SL.No.	Description	Drawing No.	Part No.	Pour Sl. No.	Quantity
1	10" CL 900 FL BODY [F.NO.2349]	122717 / REV.15	N122717WCC	1, 2	2

REVIEWED / INKED
SWITNESSED
R. Balakrishnan
R. BALAKRISHNAN
660

Remarks : Visual inspection as per MSS SP-55-2011, level of Type II-XII a found Satisfactory.
No surface irregularities to Type I found, surface irregularities to Type II-XII do not exceed example "a".
#CE= C+Mn/6+Cr+Mo+V/5+Ni+Cu/15 & *TRE = Cr+Ni+Mo+Cu+V.
This Material conforms to NACE MR0175-2021/ ISO15156-2-2020,FTDC001R7 & Material Spec No:RMC90012-Rev15 Requirements.
Carbon steel fully killed & fine grained condition. The castings are free from radioactive contamination / radiation.
QA system have undergone Specific Assessment of Materials according to Annex-1, Clause 4.3 of PED/2014/68/ EU Certified By TUV Nord Vide Certificate No:07-202-1409 WZ-1291/21 Valid till January 2024.

We Conform that the above material was manufactured, sampled, tested and inspected in accordance with the drawings, customer order requirements , material specification ASTM A216/A216M Gr WCC-2021 [UNS J02503] and was found to meet the requirements & released for dispatch.

S. Balasubramanian
Sr. Chemist
Prepared by

M. Jeyakumar
Manager QA/QC
Approved by

