



Thursday Sep-18-2025

Flowserve Facility:

Flowserve Nordstrom / Valbart Valves
1511 Jefferson St.
Sulphur Springs, TX 75482

cmtrs@flowserve.com

To:

CERTIFICATE OF CONFORMANCE

SERIAL #	HEAT #	PO #	Description	Valve Type	Class	End Connection
61-699311	699311	662668300	10" 2349 A SP	PLUG	900	FLG
61-699311	3224674AB0	662668300	10" 2349 A SP	PLUG	900	FLG
61-699311	AA2717	662668300	10" 2349 A SP	PLUG	900	FLG

We hereby certify that all the subject valves/parts/sealant have been manufactured in conformance with the applicable requirements of Flowserve Sulphur Springs Operation (FSSO) specifications and that the valve/parts/sealant materials for component parts meet the applicable requirements of FSSO drawings and ASTM specifications, ASME B16.34 (If Applicable), API Q1 10th edition, and API 6D 25th edition.(if applicable to the API monogram). Flowserve Dynamic Balanced Valves are provided with a Pressure balance feature unless specifically identified in the Valve description. All valves/parts/sealant meet all the requirements of the customer purchase order.

Documentation Technician
Justin McKee



SULPHUR SPRINGS OPERATION
PLUG VALVE TEST RECORD

SIZE: 10	PRESSURE: 900	API SERIAL NO.: 61-699311
FIGURE NUMBER: H2349 A SP		MMN SERIAL NO.: B98326
B/M NO.: F01700482		BODY SERIAL NO.: X
ASSEMBLY ORDER NO.: H3605432		BODY HEAT NO.: AA2717
		BODY RADIOGRAPH NO.: X
		COVER HEAT NO.: 3324674AB0
		STEM JOB NO.: X
		PLUG JOB NO.: X
		TYPE OF OPERATOR: OHM-TECH
		SEALANT: 950

VALVE TESTED PER RMP: 61196
REV: 19
E.I DRAWING NO.: 21700482

	OPERATION	SHELL	SEAT
TEST PRESSURES, PSIG	2250	3400	2445
TEST DURATION TIME, MIN.		15	5

TEST RESULTS			ACCEPTANCE
SHELL HYDROSTATIC TEST PRESS. GAUGE RANGE & ID. No.			PASSED: ☒ FAILED: ☐ HYDRO-2 NO LEAKAGE
DIFFERENTIAL PRESSURE TORQUE	AA= SEAT	18 FT-LBS.	MAX: 27
	AB= SEAT	19 FT-LBS.	
SEAT HYDROSTATIC	AA= SEAT	PASSED: ☒ FAILED: ☐	NO LEAKAGE
	AB= SEAT	PASSED: ☒ FAILED: ☐	
PRESS. GAUGE RANGE & ID. No.			HYDRO-2
SEAT AIR (IF SPECIFIED)	AA= SEAT	PASSED: ☐ FAILED: ☐	NO LEAKAGE
	AB= SEAT	PASSED: ☐ FAILED: ☐	
PRESS. GAUGE RANGE & ID. No.			
SHELL AIR TEST			PASSED: ☐ FAILED: ☐


SPECIAL TESTS PER ENGINEERING INSTRUCTION

FINAL INSPECTION TORQUE TESTS – ZERO PRESSURE				
INITIAL BREAK MAX.	FT-LBS.	RUNNING	4	FT-LBS.
ACTUAL	FT-LBS.	ACTUAL	3	FT-LBS.

DATE TESTED:	TESTED BY:	ACCEPTED BY:	CUSTOMER WITNESS BY:
9/17/25	J POTTS	<i>mm</i>	<i>Rogan Johnson ACI 9-17-25</i>


FILE NAME : HYDRO 2(SHELL) (144953) (09172025)
 JOB# : H3605432
 BODY HEAT# : AA2717
 COVER HEAT# : NA
 BODY S/N : B98326
 EMPLOYEE NAME : J POTTS
 API S/N : 61 699311
 MISC 1 : FLOWSERVE
 MISC 2 : 10 IN H2349 A SP

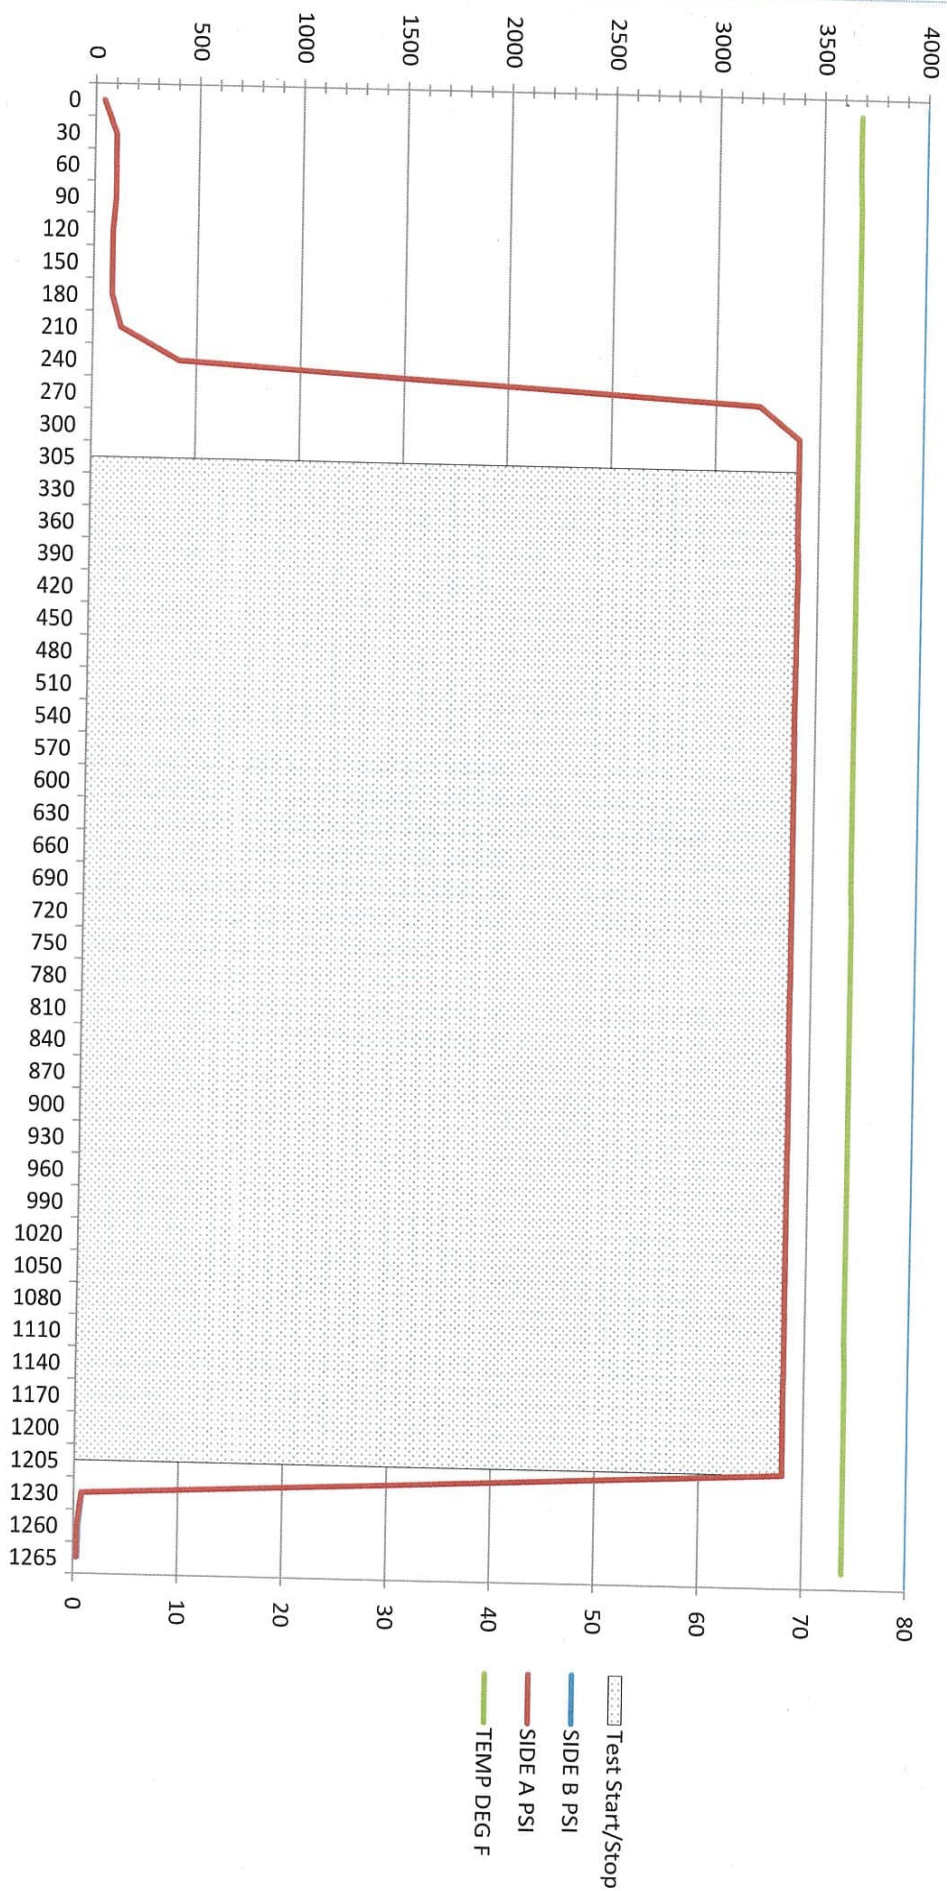CHART START TIME (HHMMSS) : 142845
 CHART START DATE (MMDDYYYY) : 9172025
 TEST START ELAPSED SECONDS : 305
 TEST END ELAPSED SECONDS : 1205
 CHART RECORD END ELAPSED SECONDS : 1265
 CHART MAX LENGTH HOURS : 24
 HIGH PRESSURE TRANSMITTERS WERE USED



FILE NAME : HYDRO 2(ALHST) (145933) (09172025)
 JOB# : H3605432
 BODY HEAT# : AA2717
 COVER HEAT# : NA
 BODY S/N : B98326
 EMPLOYEE NAME : J POTTS
 API S/N : 61 699311
 MISC 1 : FLOWSERVE
 MISC 2 : 10 IN H2349 A SP

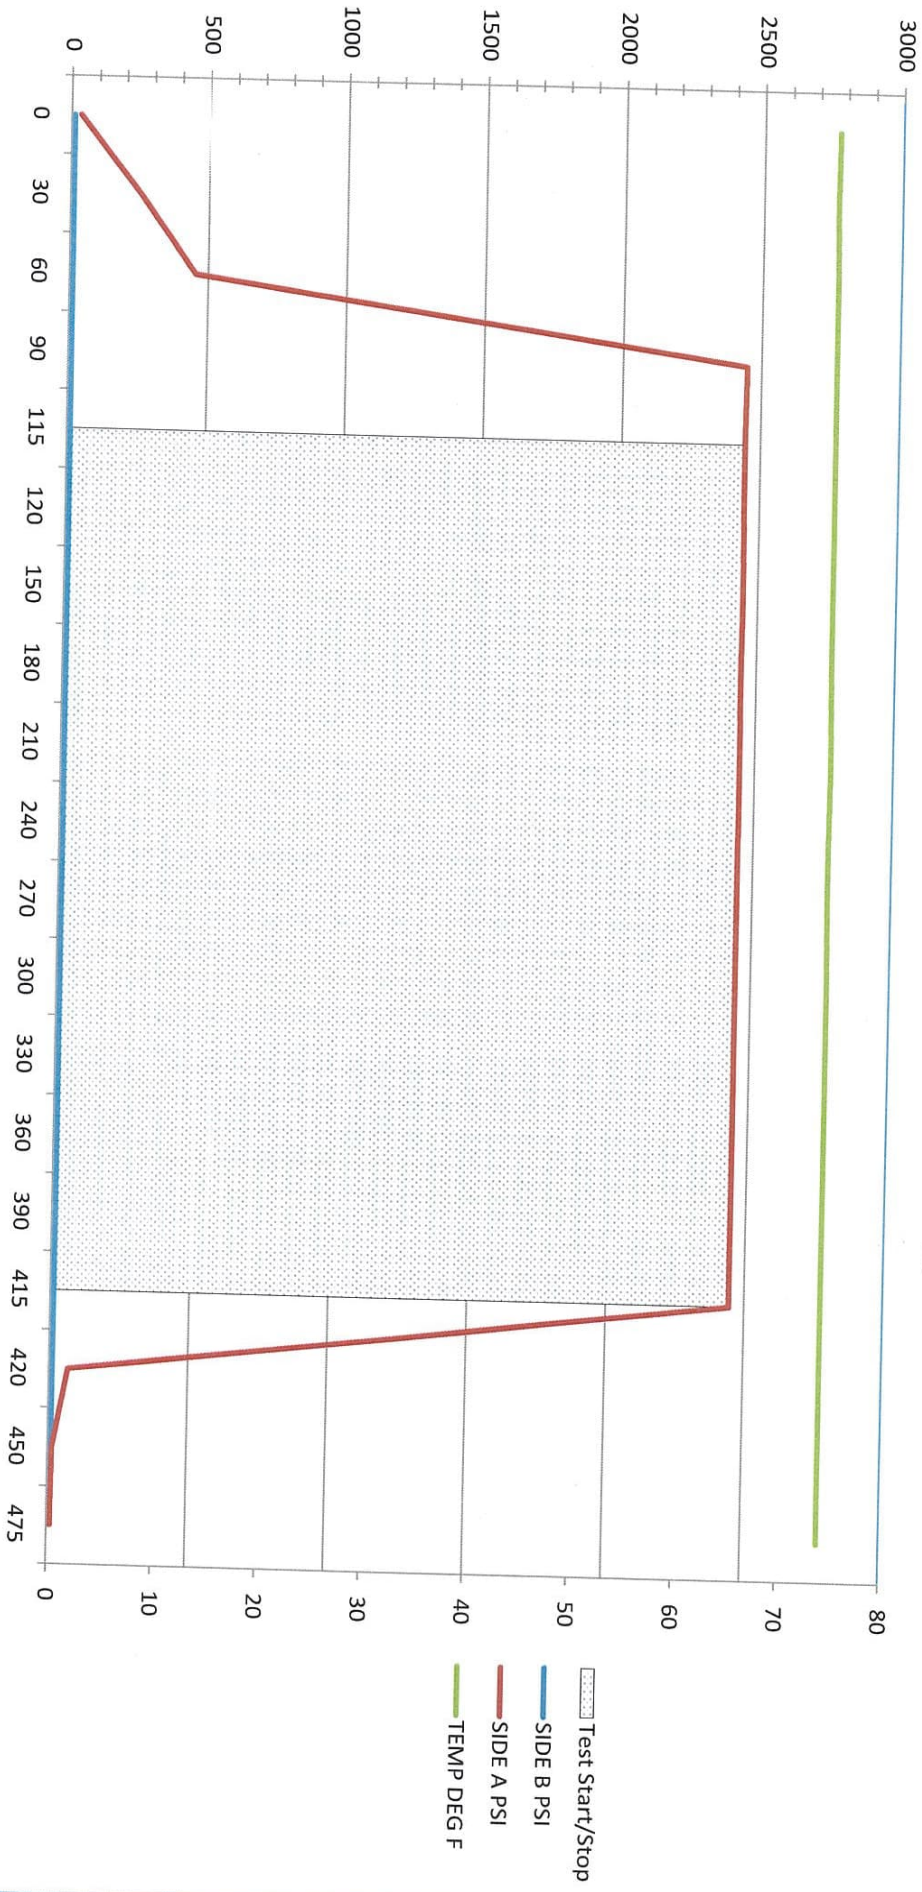
CHART START TIME (HHMMSS) : 145136
 CHART START DATE (MMDDYYYY) : 9172025
 TEST START ELAPSED SECONDS : 115
 TEST END ELAPSED SECONDS : 415
 CHART RECORD END ELAPSED SECONDS : 475
 CHART MAX LENGTH HOURS : 24
 HIGH PRESSURE TRANSMITTERS WERE USED



Test Start/Stop
 SIDE B PSI
 SIDE A PSI
 TEMP DEG F

FILE NAME : HYDRO 2(B,HST) (150734) (09172025)
 JOB# : H3605432
 BODY HEAT# : AA2717
 COVER HEAT# : NA
 BODY S/N : B98326
 EMPLOYEE NAME : J POTTS
 API S/N : 61 699311
 MISC 1 : FLOWSERVE
 MISC 2 : 10 IN H2349 A SP

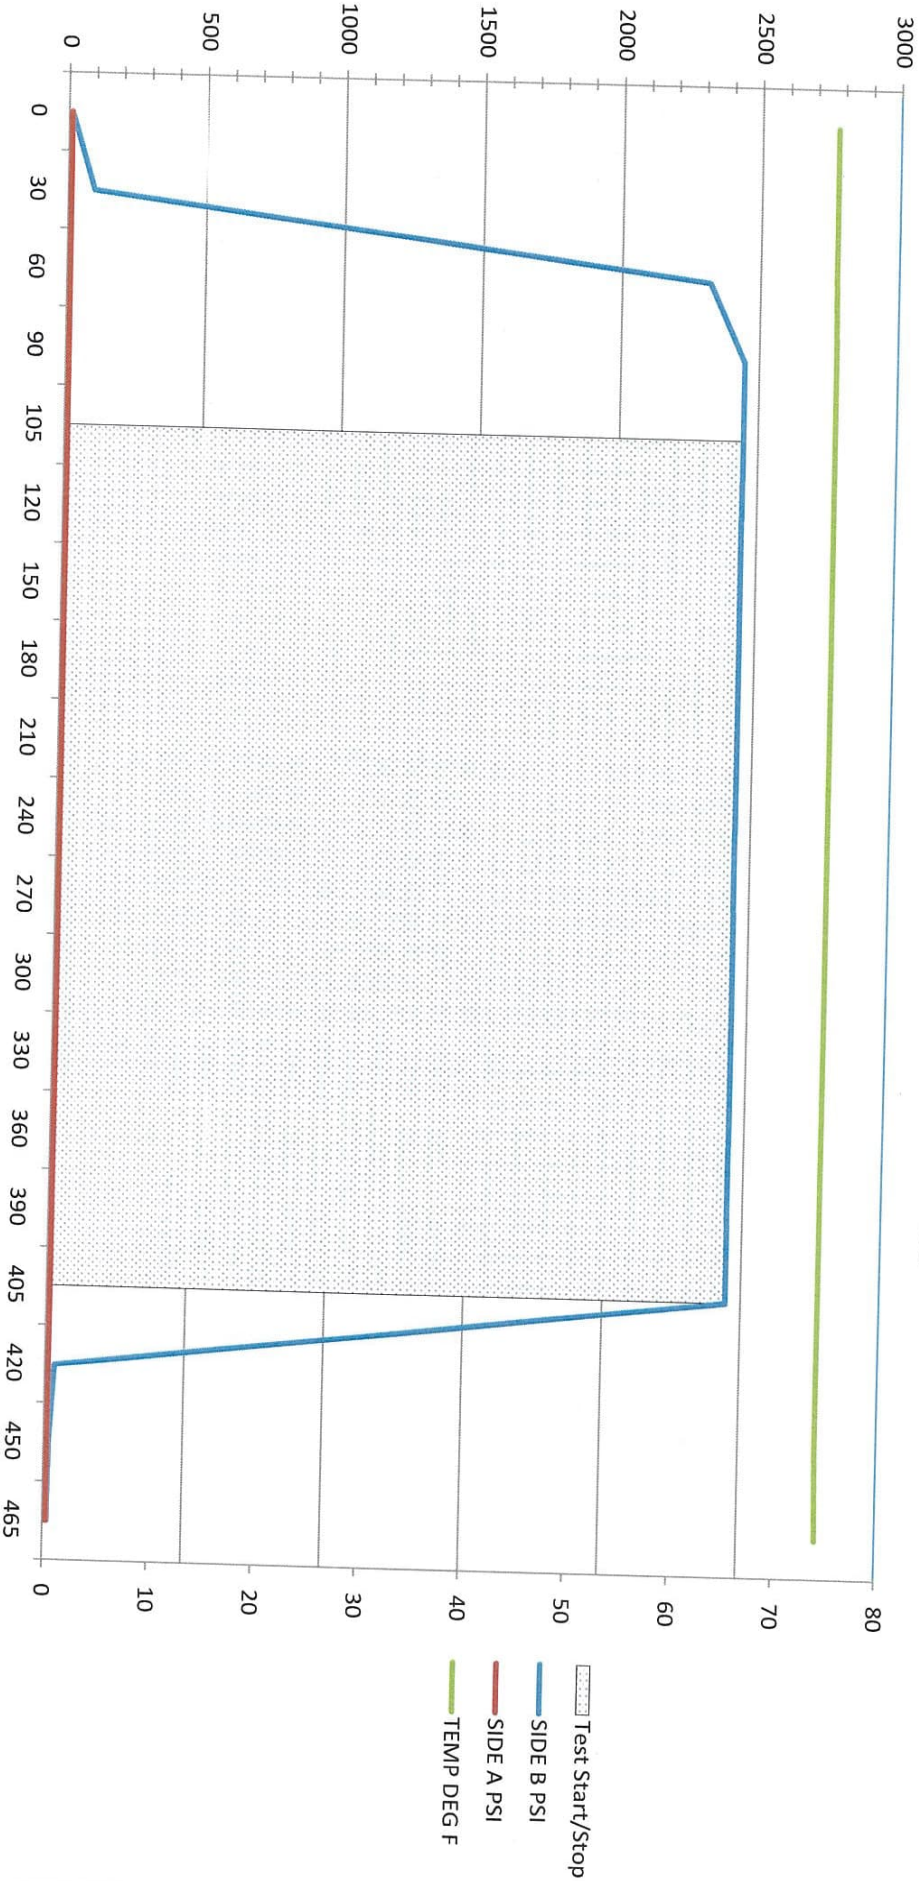CHART START TIME (HHMMSS) : 145947
 CHART START DATE (MMDDYYYY) : 9172025
 TEST START ELAPSED SECONDS : 105
 TEST END ELAPSED SECONDS : 405
 CHART RECORD END ELAPSED SECONDS : 465
 CHART MAX LENGTH HOURS : 24
 HIGH PRESSURE TRANSMITTERS WERE USED



TEST CERTIFICATE AS PER EN 10204 3.1

TC No.:	0454	Date: 23/05/2025			
Customer:	FLOWERVE INDIA CONTROLS PRIVATE LIMITED	Purchase order ref:	10124208	Date:	18-03-2025
Material Specification & year of edition	ASTM A516 Gr.70	Invoice/Delivery chalan ref:	NE/B/0454/25-26	Date:	23-05-2025

PART DETAILS

Item Code	Size/Description	No. of Plates	Plate no.	Heat no.	Mill supplier	Mill TC reference
N122327	COVER MCD 10" CL.900 GR.70 FIG NO.2349	5	AB0	3224674	JINDAL STEEL & POWER LIMITED	0000006169

CHEMICAL ANALYSIS %

Specification value	C	S	P	Mn	Si	Cu	Ni	Cr	Mo	V	Cb	Ti	CE
Minimum	0.000	0.000	0.000	0.790	0.130	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Maximum	0.300	0.025	0.025	1.500	0.450	0.430	0.430	0.340	0.130	0.040	0.030	0.040	0.430
Mill TC value	0.160	0.004	0.021	1.380	0.270	0.035	0.011	0.098	0.006	0.001	0.016	0.013	0.410
Tested value	0.199	0.010	0.024	1.134	0.374	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.400

Chemical Test done at OMEGA INSPECTION & ANALYTICAL LABORATORY Lab TC ref: TC NO:OIAL/2025/04/00631 DATE:09.04.2025

MECHANICAL ANALYSIS

Specification value	Yield Strength @ 0.2% offset method	Tensile Strength	Elongation in 2"	RA	Hardness (BHN)	Impact at -50 Deg F Min: 27 Joules Single specimen ; Avg : 27 Joules			
Minimum	38 Ksi (260 Mpa)	70 Ksi (485 Mpa)	21%		-				
Maximum	-	90 Ksi (620 Mpa)	-		233 (99 HRB)	1	2	3	Average
Mill TC value	54.82 Ksi (378 Mpa)	76.73 Ksi (529 Mpa)	35%		156	116	120	124	120
Tested value	43.00 Ksi (297 Mpa)	76.00 Ksi (527 Mpa)	28%		81, 78, 79 (HRBW)				

Mechanical Test done at OMEGA INSPECTION & ANALYTICAL LABORATORY TC NO:OIAL/2025/04/00631 DATE:09.04.2025

Heat Treatment condition: Normalized at 910±10°C, Soaking time 1min/mm or 60min whichever is more & air cooled.


MARKING

The plates are marked as "A516 GR 70", "N122327" (3224674AB0).




FLOWERVE	
QA	M. ILANGOVA
REVIEWED ☒	ACCEPTED ☒
VERIFIED ☒	REJECTED ☐

The Material conforms to ASTM A516-17 Gr.70 , NACE MR0175-2021/ISO 15156-1:2020 and Flowserve Specification: RMC25024-REV.08/00.

We hereby certify that the items mentioned above have been Visually, Dimensionally Inspected, Tested and found to be in accordance with Specification requirements.

 Supplier Quality (RAGUL.S)	 Approved by Supplier Quality Incharge (RAGUL.S)	REVIEWED / NOTED _____ _____ WITNESSED _____  R. RANJITH
---	--	---

FLOWERVE QA M. ILANGOVA REVIEWED ☒ VERIFIED ☒ ACCEPTED ☒ REJECTED ☐	 TUV INDIA 660
--	---

	VEEYES ALLOYS - PLANT 2	ISO 9001:2015 04 100 000538												
INSPECTION CERTIFICATE AS PER EN 10204:2004 Type 3.1														
Customer : FLOWSERVE INDIA CONTROLS PVT LTD (NORDSTROM) KANCHIPURAM 603 209		T.C. No : FD/AA2717/25 T.C.Date : 30/04/2025 Rev No : Dt: - -												
P.Order : 10124314 Dt. 22/03/2025		Heat No : AA2717 Pour Date : 16/04/2025												
Specification : ASTM A216/A216M Gr WCC-2021 [UNS J02503]		CASTING PROCESSED BY ELECTRIC INDUCTION MELTING FOUNDRY IDENTIFICATION : VSF												
CHEMICAL COMPOSITION % (ASTM A751-2021)														
Element%	C	Mn	Si	P	S	Cr	Ni	Mo	Cu	V	#CE	*TRE	N	Al
Minimum	---	---	---	---	---	---	---	---	---	---	---	---	---	---
Maximum	0.230	1.20	0.600	0.025	0.020	0.500	0.500	0.200	0.300	0.030	0.420	1.00	0.015	0.080
Actual Value	0.210	1.02	0.440	0.021	0.009	0.100	0.090	0.020	0.010	0.008	0.411	0.228	0.009	0.054
HEAT TREATMENT : Normalizing - Heated to 920°C soaked for 4.00 hrs and air cooled														
MECHANICAL PROPERTIES (ASTM A370-2024a)(Room temperature:22°C)														
Requirements	Yield Strength		Tensile Strength		% Elongation	% Reduction	Hardness	Bend Test	Impact Test in () Size : (10mm X 10mm X 55mm)					
	Kgf/mm ²	Ksi	Kgf/mm ²	Ksi	GL:50 mm	In Area	HBW	At 90 ° D=1t						
	0.2 % Rp		-		-	-	ASTM E10-2023							
Minimum	28.04	40	49.46	70	22	35	---	-						
Maximum	---	---	66.79	95	---	---	233	-	1	2	3	Avg		
Actual Value	35.49	50	55.88	79	35.36	60.94	154,155,154 AVG:154	Passed	--	--	--	--		
ITEM DESCRIPTION														
SL.No.	Description					Drawing No.		Part No.		Pour Sl. No.		Quantity		
1	10" CL 900 FL BODY [F.NO.2349]					122717 / REV.15		N122717WCC		1, 2		2		
														
Remarks : Visual inspection as per MSS SP-55-2011, level of Type II-XII a found Satisfactory. No surface irregularities to Type I found, surface irregularities to Type II-XII do not exceed example "a" #CE= C+Mn/6+Cr+Mo+V/5+Ni+Cu/15 & *TRE = Cr+Ni+Mo+Cu+V. This Material conforms to NACE MR0175-2021/ ISO15156-2-2020,FTDC001R8 & Material Spec No:RMC90012-Rev15 Requirements. Carbon steel fully killed & fine grained condition.The castings are free from radioactive contamination / radiation. QA system have undergone Specific Assesment of Materials according to Annex-1,Clause 4.3 of PED/2014/68/ EU Certified By TUV Nord Vide Certificate No:0045/202/WZ/1291/24/Rev.1 Valid till May 2027.														
We Conform that the above material was manufactured, sampled, tested and inspected in accordance with the drawings, customer order requirements , material specification ASTM A216/A216M Gr WCC-2021 [UNS J02503] and was found to meet the requirements & released for dispatch.														
 S.Balasubramanian Sr.Chemist Prepared by					 M.Jeyakumar Manager QA/QC Approved by									

PICK SLIP

9/18/2025

SHIP TO:

AIV LP
1520 W. ARDMORE,
ITASCA, IL 60143, US

BILL TO:

AIV, L.P.
22806 NORTHWEST
LAKE DRIVE, HOUSTON,
TX, 77095, US

Pick Slip:	10989959	
Sales order Number:	1114157	
Delivery Number:	49424133	
Freight terms:	Prepaid & Allow	
Ship method:	BESTWAY GROUND-TL-Standard	
Customer PO Number:	1180960	
Pick Slip page:	Page 1 of 1	
Customer service rep:	Lindburg, Rhonda	

Line No	Ord. Qty	Sugg. Pick Qty	Pick Qty	Location	Item/Description	Cust Request Cust Promise	Curr Sched
14	2	2	2	FG.SML.ST L...	F01637672 2 IN K2045 1/4 VALVE DM 1/4= FLG RF X BW (2.067 Country Of Origin : India Total Line Weight 92.00	26-AUG-2025 17-SEP-2025	17-SEP-2025
Total cumulated weight					92.00		

699314-2m166
699315-2m174

Customer Special Instructions: *****MTR'S & HYDROS REQUIRED WITH SHIPMENT!*****

HYDRO TESTS REQUIRED IN ALL CMTR PACKAGES FOR DYNAMIC BALANCE VALVES

All valves require MTR's to be available online or emailed to mtrs@aivinc.com. Emailed MTR's must be sent as an original PDF, not a scanned copy of the MTR.

**SHIP VIA BESTWAY PREPAY AND ALLOW!

**PACKAGE SMALL PARTS SEPARATELY AND MARK WITH PN#

DO NOT STACK CRATES OR PALLETS

CUSTOMER CONTACT INFORMATION:

CHRIS SOUBLIS
P: 847-290-1020
E: CSOUBLIS@AIVINC.COM

CINDEE BUSTILLOS
P: 847-290-1020
E: CINDEE.BUSTILLOS@AIVINC.COM

**SALES ORDER TEXT CHANGE: 9/12 RL, ADDED LINE 32, INVOICE ONLY. WE OVERSHIPPED 1 PC ON CUST PO LN 20, AND WANT TO KEEP. CUSTOMER REVISED PO.

Freight Forwarder:

Internal Notes:

OK TO SHIP

[Handwritten signature]