



CERTIFICATE OF CONFORMANCE

QTR WO#: Q34656-2

Customer: Energy Equipment

PO#: 250504-2

Description: 10" 900# RFFE Fig 55 Delta Ball Valve, G/O

Quantity: 1

S/N(s): N25346580101T

THE EQUIPMENT LISTED ABOVE CONFORMS TO THE FOLLOWING:

B16.34: ☒

NACE MR-0175; ☒
Part 1 & 2:

Fire-Safe per ☒
API 6FA:

Pressure Balance / Communication Hole:

Yes: ☐ No: ☒

API 6D 23rd Ed: ☐

API 6D 24th Ed: ☒

API 6D 25th Ed: ☒

We certify that the material listed above has been manufactured and tested in accordance with the current revisions listed above (edition, errata, and addenda), Valvitalia standards, and customer purchase order requirements. Material listed has successfully passed all mandatory test and meets supplemental requirements as noted above.

Michael Carson
Quality Assurance Manager

Date: 7/16/25

Body: N25346580101T

Body

 forge nicromo SpA		CERTIFICATO PROVE MATERIALI N° TEST CERTIFICATE EN 10204 / 3.1		170604 Sh 4	
STABILIMENTO / PLANT: VIA PROVINCIALE, 57 - 23813 BINDO DI CORTENOVA (LC) - ITALY TEL: 0039-0341-979831 FAX: 0039-0341-982228 E-MAIL: info@forgenicromo.it		DATA/DATE/ DATE/DATUM		02/10/2017	
Sede legale/Registered office: Via P.R. Giuliani 10, C/O Studio Locati - 20900 Monza (MB) - Italy Sede amministrativa/Head office: Via Buneschi 1 - 20040 Cambiago (MI) - Italy Capitale sociale/Share equity € 1.000.000,00 - Partita IVA/VAT n° 00901140962 Cod. fiscale/Reg. imprese Monza Brianza (MB) 08287210150 - REA MB-1218530		COMMESSA/JOB/ COMMANDE/KOMM		170604	
		ORDINE/AUFTRAG/ ORDER/COMMANDE		P170003831 REV.1 14/7	
		CUSTOMER/CLIENT/KUNDE		VALVITALIA S.P.A. P.ZZA SIGMUD FREUD, 1 20154 MILANO (MI)	

	COLATA heat coulé schmelze	CERTIF. ORIGINE mit certifikat certificat d'origine werkzeugzeugnis	NORMA MATERIALE material grade norme material werkstoff	DESCRIZIONE description description gegestand	QUANTITA quantity quantité stückzahl	ITEM
	217852	ACCIAIERIE VENETE SpA	ASTM A350 LF2	FORGED BODY Ø 411x326x258 mm 7UCP081U100D4AAR0G R170000226-42 012	75	12
	217852	ACCIAIERIE VENETE SpA	ASTM A350 LF2	FORGED BODY Ø 500x398.5x297 mm 7UCP108U100D4AAR0G R170000226-52 017	10	17
	217852	ACCIAIERIE VENETE SpA	ASTM A350 LF2	FORGED BODY Ø 500x398.5x297 mm 7UCP108U100D4AAR0G R170000226-53 018	15	18
	217852	ACCIAIERIE VENETE SpA	ASTM A350 LF2	FORGED BODY Ø 500x398.5x297 mm 7UCP108U100D4AAR0G R170000226-54 019	25	19

ANALISI CHIMICA/ chemical analysis / analyse chimique / chemische zusammensetzung																
	COLATA heat coulé schmelze	C %	Mn %	Si %	P %	S %	Cr %	Ni %	Mo %	Cu %	V %	Al %	Nb %	Ti %	N %	CE %
	217852	0.23 max.	0.8 - 1.35	0.15 - 0.3	0.035 max.	0.02 max.	0.3 max.	0.4 max.	0.12 max.	0.4 max.	0.05 max.		0.02 max.			0.43 max.
		0.16	1.141	0.249	0.013	0.008	0.099	0.139	0.025	0.231	0.023	0.03	0.001	0.01	0.0077	0.404

CARATTERISTICHE MECCANICHE/ mechanical tests according to ASTM A370:										
	COLATA heat coulé schmelze	SNERVAM. Yield Strength MPa 275 min.	ROTTURA Tensile Strength MPa 485 - 655	ALLUNG. Elongation % 22 min.	STRIZIONE Reduction of Area % 30 min.	°C temp	HARDNESS 190 max.	IMPACT TEST KV 10X10X55 mm		°C temp
								SINGLE 22 J min.	AVERAGE 28 J min.	
	217852	293	493	32	69	+20	142 143 144	53 60 54	56	-46

HEAT TREATMENT: NORMALIZED AT 900°C COOLING IN AIR		$CE = C + Mn/6 + (Cr+Mo+V)/5 + (Ni+Cu)/15$		STEEL MAKING PROCESS: FULLY KILLED CARBON STEEL MADE BY ELECTRIC FURNACE	
MATERIAL IN ACCORDANCE WITH: NACE MR01-75 ASTM A350 LAST ED. MDS 0D4 REV 4					
VISUAL INSPECTIONS AND DIMENSIONAL CHECK : SATISFACTORY		MATERIAL FREE FROM RADIOACTIVE CONTAMINATION			

DATE: 02/10/2017	ISSUED BY: Q.A.D.  D. FRIGERIO	APPROVED BY: Quality Mgr  S. CERLETTI	T.P.I.
-------------------------	---	---	--------



58189

 SIDERFORGEROSS 36011 Arsiero (VI) ITALY - Via Cartiera di Mezzo, 38 Tel. 0445 714400 - Fax 0445 714444	Inspection Certificate Quality Control Department		COMPANY WITH QUALITY SYSTEM CERTIFIED BY DNV = ISO 9001 & EN 9100 = COGOLLO PLANT 36010 Cogollo del Cengio (VI) ITALY - Via M. Schiro, 2
	N° 9808 / 22 REV.0 Date 29/11/2022		
Purchaser: VALVITALIA S.P.A. PIAZZA SIGMUND FREUD 1 20154 MILANO MI	Order No.: OF000066001	Certificate type: EN 10204 ed. MARCH 2005 ☐ 2.2. ☒ 3.1. ☐ 3.2	
	SFRG job No.: OV223715	Melting practice ☒ E.F.V.D ☐ E.F ☐ AOD ☐ VOD ☐ EB ☐ VAR ☐ VIM ☐ ESR	

CHEMICAL ANALYSIS / LADLE ANALYSIS

MATERIAL: ASTM-A350-LF2-CL.1 ED.21

HEAT: 135282

SUPPLIER: Pallanzeno s.r.l.

C	Mn	Si	Ni	Cr	S	P	Al	Cu	Mo	Ti	Sn	V	Nb	N	Pb	H	B	Ca		
%	%	%	%	%	%	%	%	%	%	%	%	%	%	%	%	ppm	ppm	%		
0,16	1,16	0,26	0,13	0,1	0,002	0,013	0,033	0,22	0,03	0,005	0,009	0,003	0,001	0,006	0,001	0,9	4	0,0018		

C.E. (Long) = 0,400

HEAT TREATMENT

TYPE	TEMP °C	HOURS	COOLING	TYPE	TEMP °C	HOURS	COOLING
NORMALIZING	900	5,5	AIR				

MECHANICAL TESTS

		MPa	MPa	MPa	%	%	Dir.	Type	Temp °C	Avr/Min	J	Min	Max	
FROM PIECE	☐	MIN	485	275		22	30	TAN	KV	-46	27	21	148	197
FROM QTC	☒	MAX	655											

Treated with the Pcs

OBTAINED

N° TEST	DIM	SECT.	LENGHT	TEMP	DIR	UTS	YS 0,2	YS	EL	RA	IMPACT TEST								HB on pieces	
	mm	mm	mm	°C		MPa	MPa	MPa	%	%	Dir.	Type	Temp	°C	JOULE	Avr	Min	Max		
6104	12,50	122,72	50,00	+20	TAN	496	311		33,5	75,0	TAN	KV	-46	52	62	60	58	150	150	

OUR ITEM	CUSTOMER ITEM	DESCRIPTION	DRAWING	QUANTITY
7	from 70 to 70	CLOSURE TYPE 7U GREZ. 10" #900 546x254x291	V000043783	20
	from to			
	from to			
	from to			
	from to			
	from to			

REMARKS:

PIECES CONFORMING TO DIMENSIONAL AND VISUAL CONTROL. REDUCTION RATIO > 3:1
 MATERIAL ACCORDING TO MDS_001 Rev. 3, ITP: QTR STOCK - 7U Rev.8
 MATERIAL ACCORDING TO NACE MR 01-75/ISO 15156 ed. 2015.
 QUALITY ASSURANCE SYSTEM IN ACCORDANCE WITH THE P.E.D. 2014/68/EU ANNEX 1 PARA. 4.3.
 HEAT TREATMENT FURNACE CALIBRATED ACCORDING TO API 6D 25th ED. ANNEX H.
 REF. S.N. FROM 1 TO 20



17 APR. 2023

Note: Prodotti conformi ai requisiti dell'ordine - Products are in compliance with the requirements of the order - Les produits sont conforme à votre ordre - Produkt entsprechend bestellungs spezifikation.

Material conforming ☒	Quality Control Dept. 	Surveyor:
Material non conforming ☐		

SGQ 138/99 Page 1 di 1



 via G.Spezzapria, 1 36010 Velo d'Astico località Seghe (VI) ITALY Tel. +39 0445 731313 Fax. +39 0445 731490		Q. C. DEPT	INSPECTION TEST CERTIFICATE CERTIFICATO DI COLLAUDO EN 10204:2004 3.1												
			No. T 4366 / 2022 /COM r. 0 pg. 1 / 2 DELIVERY NOTE 1889/2022 FA DOC. DI TRASPORTO												
JOB 666 / 22 p. 5 / 0 COMMESSA SPECIFICATION MDS_001 SPECIFICA MATERIAL ASTM A350 LF2 Cl.1 MATERIALE ADD. REQUIREMENTS REQUISITI SUPPLEM. IDENTIFICATION IDENTIFIC. HEAT N. 132984 COLATA SUPPLIER TRAVI E PROFILATI FORNITORE MELT METHOD EFVD ELABORAZIONE LOG NUMBER LOG NUMBER ARTICLE CLOSURE - CHIUSURA V.SFERA Ø560x241x311.5 mm ARTICOLO		REV 2 REV	CUSTOMER CLIENTE VALVITALIA S.P.A. CORSO EUROPA, 15 20122 MILANO MI		PURCHASE ORDER OF000054256 ORDINE N. POSITION 50 POSIZIONE SHIPP. COND. NORMALIZED /NORMALIZZATO ST. FORNITURA DRAWING 7UCH109U10..G r.0 DISEGNO P. N. V000043783 CODICE										
CHEMICAL REQUIREM. ANALISI RICHIESTA		C % 0,230 N ppm 70	Mn % 0,600 1,350 Ceq. % 0,420	Si % 0,150 0,300 *5 % 1	P % 0,025 Cr+Mo % 0,320	S % 0,020	Cr % 0,300	Ni % 0,400	Mo % 0,120	Cu % 0,400	Al % 0,029	Nb % 0,001	V % 0,002	H ppm <2	
ACTUAL CHEMISTRY ANALISI OTTENUTA ladle analysis/sulla colata on product/sul prodotto		C % 0,171 N ppm 70	Mn % 1,180 Ceq. % 0,404	Si % 0,254 *5 % 0,376	P % 0,008 Cr+Mo % 0,084	S % 0,003	Cr % 0,069	Ni % 0,090	Mo % 0,015	Cu % 0,200	Al % 0,029	Nb % 0,001	V % 0,002	H ppm <2	
HEAT TREATMENT TRATTAMENTI TERMICI Normalizing/Normalizzazione		900 °C x 4 Hour/Ore 30 minutes/Minuti		air cooling/raffredd. in aria		BATH TEMPERATURE TEMPERATURA BAGNO BEFORE MAX AFTER PRIMA DOPO									
HARDNESS ON PIÈCES DUREZZA SUI PEZZI		ASTM E10/EN 6506													
HBW		REQUIRED RICHIESTA		MIN -	MAX 197	HBW		OBTAINED OTTENUTA		MIN 153	MAX 156				
MECHANICAL REQUIREMENTS REQUISITI MECCANICI FROM TEST BAR DA BARROTTO 100x100x200 treat. with pcs. TEMPERATURE TEMPERATURA 20 °C		Dir. Direzione	UTS/R MPa	Ys/UTS MPa	Ys 0.2% MPa	Ys 0.02% MPa	A/A %	Z/Z %	IMPACT TEST REQUIRED RESILIENZA RICHIESTA Dir. Tipo Temp. Med/Min LONG KV -46 °C 27.0 / 21.0 3 NORM ASTM A370 NORMA						
NORM ASTM A370 NORMA		IMPACT TEST OBTAINED RESILIENZA OTTENUTA °C J LONG KV -46.0 298 278 144							HARDNESS HARDNESS HBW						
TEST NO. N. PROV.	Diam mm	Leng mm	Dir. Direzione	UTS/R MPa	Ys/UTS MPa	Ys 0.2% MPa	Ys 0.02% MPa	A/A %	Z/Z %	LONG KV	-46.0	298	278	144	
REMARKS NOTE *5 = Cr+Mo+Ni+Cu+V According to API 6D 24 edition and NACE MR175:ISO 15156. Reduction ratio = 3.5 : 1 No welding repair performed/Mater. senza riparazioni di saldatura															
DATE DATA Jun 06 2022		PERFORMED BY ESEGUITO DA FORGITAL ITALY SPA MARTINA BERNARDI - Metallurgist and PQ Junior - Industrial				APPROVED BY APPROVATO DA FORGITAL ITALY Product/Quality Dept. Davide Ciscato				INSPECTOR ISPETTORE					

16 GIU. 2022

JOB 666 / 22 p. 5 / 0

COMMESSA

SPECIFICATION

MDS_001

REV 2

CUSTOMER

CLIENTE

VALVITALIA S.P.A.

SPECIFICA

REV

MATERIAL

ASTM A350 LF2 Cl.1

CORSO EUROPA, 15

MATERIALE

20122 MILANO

MI

ADD. REQUIREMENTS

REQUISITI SUPPLEM.

IDENTIFICATION

IDENTIFIC.

HEAT N.

132984

QUANTITY 10

PURCHASE ORDER

OF000054256

ORDINE N.

POSITION

50

POSIZIONE

SHIPP. COND.

NORMALIZED /NORMALIZZATO

SUPPLIER

TRAVI E PROFILATI

ST. FORNITURA

FORNITORE

MELT METHOD

EFVD

DRAWING

7UCH109U10..G r.0

ELABORAZIONE

DISEGNO

LOG NUMBER

P. N.

V000043783

LOG NUMBER

CODICE

ARTICLE

CLOSURE - CHIUSURA V.SFERA Ø560x241x311.5 mm

ARTICOLO

We certify that the products mentioned above have been made according to the applicable standards and to the order's requirements
Si certifica che il materiale sopra descritto è in conformità con lo standard applicabile e con i requisiti di ordine per l'acquisto

The raw material and the finished products are tested to assure no radioactive contamination
Le materie prime e i prodotti finiti sono testati per garantire la non contaminazione radioattiva



16 GIU. 2022

No welding repair performed/Mater. senza riparazioni di saldatura

DATE
DATA

Jun 06 2022

PERFORMED BY
ESEGUITO DA

FORGITAL ITALY SPA
MARTINA BERNARDI
- Metallurgist and PQ Junior -
Industrial

APPROVED BY
APPROVATO DA

FORGITAL ITALY
Product/Quality Dept.
Davide Ciscato

INSPECTOR
ISPETTORE

Bee

Ball: N25346580101T

		FOC Cisco Spa Via Pasin, 1 Seghe di Velo d'Astico 36010 Vicenza - Italy Tel. +39 0445 739 111 www.foc.it certificates@foc.it		Quality control department - Certificate of conformity EN 10204:2005 3.1 No. 2017 1187/CC/1 Rev.0 dtd 31/07/2017 Page 1 of 1	
		Customer: VALVITALIA S.P.A. (100334) Item description: SFERA DN 10" CLASSE 150-600 Drawing no.: 5USF101U00..G Rev. 0 Purchase order: P170003862 REV.1 DEL 26/06/17 dtd 29/05/2017		FOC job: 209029 Dimensions: PN / MN: 5USF101U000D4AAR0G Quantity: 250	
Order Pos	Quantity	Serial number	Test no.	Project	Customer job
12	10	001+010	1144		R170000226-52
13	15	011+025	1144		R170000226-53
22	25	026+050	1144		R170000226-54
23	75	051+125	1144		R170000226-50
24	50	126+175	1144		R170000226-51
25	25	176+200	1144		R170000226-48
26	25	201+225	1144		R170000226-49
27	25	226+250	1144		R170000226-47
Heat treatment: Normalized Steel grade: ASTM A 350 LF2 Steel maker: ABS ACCIAIERIA BERTOLI SAFAU Steel code:			Surface condition: As forged & Shot-blasted Heat number: 439823 Heat code: AM Code:		

On the basis of all tests we performed before releasing pieces, we declare that a.m. products are conform to order indications and to related dwg. Additionally the supply fulfills internal requirements and all requirements imposed by law.

Standards of Reference:

Specifications: OD4 REV.3
 Mechanical tests: ASTM A370-15 - FOC IOP 119, ASTM E8-15A - FOC IOP 135, ASTM E23-16A - FOC IOP 136, ASTM E10-15A - FOC IOP 138


Visual and Dimensional control:

No relevant defects found during visual control.
 The results of dimensional control met the requested sizes.
 No welding performed.

Attachments	Number	Rev.	Dated
Material certificate	2017 1187/MC/1	0	31/07/2017
Heat treatment certificate	2017 1187/TR/1	0	31/07/2017
Raw material certificate	173612/1	0	21/04/2017



21/07/2017

Performed By  QUALITY DEPARTMENT Anna Ceribella	Approved By  QUALITY MANAGER Federico Sella	Inspector
---	---	-----------

57818

Stem: N25346580101T

Test set



IMS S.p.A.
acciai speciali

IMS S.p.A. - Sede: via Alessandro Polini, 450 - 20862 Arcore (MB) - www.ims.it
C.F. 00485910012 - Reg. Imp. Monza e Brianza - P.I. IT 02387540962 - REA, MB 264817
Cap. Soc. € 40.700.000,00 i.v. - Direzione e coordinamento: JACQUET METAL SERVICE S.A.

Cert Number 1197245
Test Reference 1887012

16/10/2017

VALVITALIA SPA
PIAZZA SIGMUND FREUD 1
20154 MILANO (MI)

Issued from
IMS SpA
Filiale di Arcore
Via Alessandro Polini, 450
20862 Arcore (MB)

Sold To: VALVITALIA SPA, PIAZZA SIGMUND FREUD 1, 20154 MILANO (MI)
Ship To: RASTELLI CLAUDIO SNC, VIA S. GIORGIO 96, 27019 VILLANTERIO (PV)

Customer 1008334/18
Our Order 890812-11-1
Your Order
Packing List P170003716 (10/07/2017)
845138-1 (22/09/2017)

Product Information

Round bar 42CrMo4 Hardened and tempered (A.4140)
105mm x 243mm Fixed length lt da 51 a 58
7UST101U100DFAAR0G

Heat
242724

Pcs 250
KGS 4.155

Shipped Heats 242724

Chemical Composition

C	Mn	Si	P	S	Cr	Ni	Mo
0,406	0,81	0,15	0,01	0,022	1,11	0,22	0,18
Cu	Al	Sn	Ti	V	Nb	Ca	Co
0,17	0,01	0,009	0,0019	0,006	0,006	0,0005	0,009
B	As	Sb					
0,0001	0,005	0,001					

Physical Tests

Rm (N/mm ²) (L)	Re (N/mm ²) (L)	A (%) (L)	Z (%) (L)
915 N/ Sq mm	777 N/ Sq mm	13,6 %	52 %

Jominy/Hardness Rockwell C

1,5mm	3,0mm	5,0mm	7,0mm	9,0mm	11,0mm	13,0mm	15,0mm
58,5	58,2	57,5	57,1	56,5	55,3	54,3	52,9
20,0mm	25,0mm	30,0mm	35,0mm	40,0mm	45,0mm	50,0mm	
48,8	44,7	41,6	39,9	38,3	36,7	35,2	

Heat Treatment

Heat Trmt	Temp	Time	Cool Mthd	Impc	UM	Temp	D	Rslt 1	Rslt 2	Rslt 3
				KCV	J	-46 C	L	59,0	55,0	57,0
				KCV	J	20 C	L	84,0	86,0	88,0

Impact Tests

Microinclusion

ASTM E45

A	B	C	D
F	G	F	G
1,5	1,0	0,5	0,5

Controllo antimescolanza/Antimix control: 100% ok
Controllo superficiale/Surface control: 100% ok
Grano austenitico/Austenitic grain: 6 EN/ISO 643
Controllo ultrasuoni/Ultrasonic test: 100% ok
R/R=7
Acciaio degasato a vuoto/Vacuum degassed steel
Norma di riferimento/Reference standard: EN 10083-3
Tipo di certificato del produttore / Type of Mill certificate: EN 10204 - 3.1

Durezza dopo t.t./Hardness after heat treatment: 215 HB



We declare that the above described product complies with the order requirements.
This IMS certificate is a true copy of the producer's original one kept in our archives.
Branch quality control: Daniele Rampinelli

16/10/2017 03.52 1

58341

Seati

Seats: N25346580101T

HOT ROLL <i>Powered by Pulsar</i>		Rapporto di Collaudo: EN 10204 3.1																									
Cliente - Customer : BBD S.R.L.		Nr.Ordine del - Nr.Order of : 700/2017		DdT Spediz. - Shipment Nr : 371670																							
Quantità - Quantity 520	Id HotRoll : RH4114512	Particolare - Part Number : G-ANA500-0546	Descrizione particolare - Part Number Description : ANELLI BBD G-ANA500-0546 320X275X23 LF2 NORM																								
Materiale / Material Grade A105/A350LF2	Specifica / Specification: A350LF2+PSVP.00.LF2		Acciaieria / Steelmaker VENETE	Nr.Colata / Heat Nr.: 243272																							
Analisi del materiale in % - Chemical Analysis in % [Analisi acciaieria - Results from the stillmill analysis]																											
	C	Si	Mn	Ni	Cr	Mo	Cu	S	P	Al	Ti	Ca	B														
Max	0,20	1,3	1,3	0,4	0,3	0,12	0,4	0,02	0,02	0,06																	
Min	0,00	0,15	0,6	0	0	0	0	0	0	0																	
Meas:	0,162	0,233	1,179	0,124	0,153	0,019	0,163	0,01	0,011	0,027																	
	As	Sb	Pb	Sn	V	Nb	O	H	N																		
Max					0,05	0,02																					
Min					0	0																					
Meas:					0,022	0,011																					
Prove meccaniche secondo EN 10045/1 - Mechanical properties to EN 10045/1 Results from Hot Roll test Id= 4114512553243272																											
Temperatura-Temperature: (°C) : 20		R N/mm2	Rs N/mm2	A%	Z%	Tipo Resilienza - Type Resilience : KV																					
Valori richiesti Requested values		Min	485	250	22	30	Temperatura - Temperature (°C) : -46																				
Valori ottenuti Obtained values		Max	655				Richiesto - Requested Min (J) : 27																				
			505	353	29	65	Valori - Values (J) : 129 121 118																				
Trattamento Termico - Heat Treatment : Normalizzazione e Sabbiatura Normalized and Sandblasted						Durezze - Hardness Prova su anelli secondo norma - Test on rings according to : ISO 6506 - HBW 10/3000 Richiesta - Hardness Required (Min-Max) : 197 Max Durezza misurata - Hardness Measured : 143-148																					
Hardenability Jominy (mm-HRC) [Test acciaieria - Results from the stillmill test]																											
	1	1,5	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	18	20	24	25	28	30	35	40	45	50
Max																											
Meas																											
Min																											
Inclusioni secondo norma - Inclusions according to : ASTM						Grano Austenitico - Austenitic Grain Size:																					
Note - Remarks	Verifica visiva e dimensionale : Conforme - Visual and dimensional check: Conforming																										
	I requisiti richiesti dalle specifiche valide sono rispettate - All requirements in the valid specification are met.																										
	Il corretto grado del materiale è stato verificato sugli anelli - The rings have been checked for correct material grade.																										
	NORME DI RIFERIMENTO: NACE MR0175/ISO 15156 NACE MR 0103 97/23/EC PED																										
Data : 31/07/2017		Operatore / Operator <i>F. Bolognesi</i>				A.Q. / Quality Manager <i>F. Ronchetto</i>				Pag. 1 / 1																	

MSQ096B Rev.0

58037

Top Cover

Top Cover: N25346580101T



IMS S.p.A.

acciai speciali

IMS S.p.A. - Sede: via Alessandro Polini, 450 - 20862 Arcore (MB) - www.ims.it
C.F. 00485910012 - Reg. Imp. Monza e Brianza - P.I. IT 02387540962 - REA: MB 264817
Cap. Soc. € 40.700.000,00 i.v. - Direzione e coordinamento: JACQUET METAL SERVICE S.A.

Test set

Cert Number 845136-4
Test Reference 1887543

25/09/2017

VALVITALIA SPA
PIAZZA SIGMUND FREUD 1
20154 MILANO (MI)

Issued from
IMS SpA
Filiale di Arcore
Via Alessandro Polini, 450
20862 Arcore (MB)

Sold To: VALVITALIA SPA, PIAZZA SIGMUND FREUD 1, 20154 MILANO (MI)
Ship To: CEC WORKING SRL, VIA PORTICO 37, 24050 ORIO AL SERIO (BG)

Reference
P170003716 (10/07/2017)
845136-1 (22/09/2017)

Customer 1008334/11
Our Order 890812-3-1
Your Order
Packing List

Product Information

Round bar ASTM A350LF2 Normalized
170mm x 58mm Fixed length it da 17 a 24
7UFP101U100D4AAR0G

Heat
439402

Pcs 250
KGS 2.636

Chemical Composition

C.E.: 0,3867

D.I.: 0

C	Mn	Si	P	S	Cr	Ni	Mo
0,17	1,05	0,26	0,009	0,002	0,12	0,08	0,02
Cu	Al	N	Sn	Ti	V	Nb	Ca
0,11	0,031	70 ppm	0,005	0,0023	0,005	0,006	0,0012
Co	Pb	B	O				
0,007	0,001	0,0001	11 ppm				

Physical Tests

Rm (N/mm ²) (L)	Re (N/mm ²) (L)	A (%) (L)	Z (%) (L)
528 N/ Sq mm	370 N/ Sq mm	32,2 %	74 %
HB			
157-163			

Heat Treatment

Heat Trmt	Temp	Time	Cool Mthd	Impc	UM	Temp	D	Rsit 1	Rsit 2	Rsit 3
				KCV	J	-50 C	L	72,0	83,0	94,0

Impact Tests

Impc	UM	Temp	D	Rsit 1	Rsit 2	Rsit 3
KCV	J	-50 C	L	72,0	83,0	94,0

Microinclusion

ASTM E45

A	B	C	D
F	G	F	G
1,0	1,0	2,0	1,0

Controllo antimescolanza/Antimix control: 100% ok

Controllo superficiale/Surface control: 100% ok

Grano austenitico/Austenitic grain: 8 ASTM E112

Controllo ultrasuoni/Ultrasonic test: 100% ok EN 10308 Class 4/NNSE TPX154 Class 1/SEP 1920 Class C

R/R=7

Acciaio degasato sottovuoto/Vacuum degassed steel

Norma di riferimento/Reference standard: ASTM A350LF2 Class 1/A105N; NACE MR0175; ASME SA350

Tipo di certificato del produttore / Type of Mill certificate: EN 10204 - 3.1



17.01.2017

We declare that the above described product complies with the order requirements.
This IMS certificate is a true copy of the producer's original one kept in our archives.
Branch quality control: Daniele Rampinelli

25/09/2017	02.15		1
------------	-------	--	---

58348

Studs. Nuts

Studs (730199), Nuts (550328): N25346580101T



733560012017

bea srl

via dei Ronchi, 91 - 21058 Solbiate Olona (VA) Italy

Capitale Sociale Euro 100.000,00 int. vers. - n° mecc. VA 057235

Cod. Fisc. - P.IVA e Reg. Imp.: 02905380123 REA CCIAA Varese 301154

+39 (0331) 649093 +39 (0331) 649708 .bea@beagroup.com

date 6/09/ 2017

No. 73356 / 001

INSPECTION CERTIFICATE

page 1 / 4

EN 10204 -3.1

Customer VALVITALIA SPA

Order No. P170003846 REV.0

Delivery note 00929

date 26/05/2017 Specification: ASTM / NACE

date 4/09/2017 Internal job 2017-64973 date 1/06/2017

MATERIAL DESCRIPTION

Item	Article	Code	Spec.	Material/Spec.	Sizes	Q.ty	**Heat treat./Min tempering
04	HEX NUTS	DA1900000S1AA	18.2.2T10H	A194-16a 2HM	3/4 UNC	480,000 QT	/ 640°C
05	HEX NUTS	DA1900000S1AA	18.2.2T10H	A194-16a 2HM	3/4 UNC	600,000 QT	/ 640°C
06	HEX NUTS	DA1900000S1AA	18.2.2T10H	A194-16a 2HM	3/4 UNC	600,000 QT	/ 640°C
18	HEX NUTS	DA2540000S1AA	18.2.2T10H	A194-16a 2HM	1" UNC	480,000 QT	/ 640°C
19	HEX NUTS	DA2540000S1AA	18.2.2T10H	A194-16a 2HM	1" UNC	720,000 QT	/ 640°C
20	HEX NUTS	DA2540000S1AA	18.2.2T10H	A194-16a 2HM	1" UNC	1.200,000 QT	/ 640°C
21	HEX NUTS	DA2540000S1AA	18.2.2T10H	A194-16a 2HM	1" UNC	400,000 QT	/ 640°C
22	HEX NUTS	DA2540000S1AA	18.2.2T10H	A194-16a 2HM	1" UNC	600,000 QT	/ 640°C
23	HEX NUTS	DA2540000S1AA	18.2.2T10H	A194-16a 2HM	1" UNC	1.000,000 QT	/ 640°C
24	HEX NUTS	DA2540000S1AA	18.2.2T10H	A194-16a 2HM	1" UNC	1.800,000 QT	/ 640°C
25	HEX NUTS	DA2540000S1AA	18.2.2T10H	A194-16a 2HM	1" UNC	1.200,000 QT	/ 640°C
44	STUDBOLTS	TR2220950R4AA	B16.5	A193-16 B7M	7/8 UNC x 95	560,000 QT	/ 720°C
45	STUDBOLTS	TR2220950R4AA	B16.5	A193-16 B7M	7/8 UNC x 95	560,000 QT	/ 720°C
57	STUDBOLTS	TR2221150R4AA	B16.5	A193-16 B7M	7/8 UNC x 115	220,000 QT	/ 720°C
58	STUDBOLTS	TR2221150R4AA	B16.5	A193-16 B7M	7/8 UNC x 115	330,000 QT	/ 720°C
60	STUDBOLTS	TR2221250R4AA	B16.5	A193-16 B7M	7/8 UNC x 125	100,000 QT	/ 720°C
61	STUDBOLTS	TR2221250R4AA	B16.5	A193-16 B7M	7/8 UNC x 125	150,000 QT	/ 720°C
62	STUDBOLTS	TR2221250R4AA	B16.5	A193-16 B7M	7/8 UNC x 125	250,000 QT	/ 720°C
63	STUDBOLTS	TR2541080R4AA	B16.5	A193-16 B7M	1" UNC x 108	1.050,000 QT	/ 720°C
64	STUDBOLTS	TR2541080R4AA	B16.5	A193-16 B7M	1" UNC x 108	700,000 QT	/ 720°C
65	STUDBOLTS	TR2541150R4AA	B16.5	A193-16 B7M	1" UNC x 115	750,000 QT	/ 720°C
66	STUDBOLTS	TR2541150R4AA	B16.5	A193-16 B7M	1" UNC x 115	500,000 QT	/ 720°C
67	STUDBOLTS	TR2541330R4AA	B16.5	A193-16 B7M	1" UNC x 133	300,000 QT	/ 720°C
68	STUDBOLTS	TR2541330R4AA	B16.5	A193-16 B7M	1" UNC x 133	450,000 QT	/ 720°C
69	STUDBOLTS	TR2541330R4AA	B16.5	A193-16 B7M	1" UNC x 133	750,000 QT	/ 720°C
70	STUDBOLTS	TR2541350R4AA	B16.5	A193-16 B7M	1" UNC x 135	360,000 QT	/ 720°C
71	STUDBOLTS	TR2541350R4AA	B16.5	A193-16 B7M	1" UNC x 135	540,000 QT	/ 720°C
72	STUDBOLTS	TR2541350R4AA	B16.5	A193-16 B7M	1" UNC x 135	900,000 QT	/ 720°C
73	STUDBOLTS	TR2541400R4AA	B16.5	A193-16 B7M	1" UNC x 140	100,000 QT	/ 720°C
74	STUDBOLTS	TR2541400R4AA	B16.5	A193-16 B7M	1" UNC x 140	150,000 QT	/ 720°C
75	STUDBOLTS	TR2541400R4AA	B16.5	A193-16 B7M	1" UNC x 140	250,000 QT	/ 720°C
76	STUDBOLTS	TR2541450R4AA	B16.5	A193-16 B7M	1" UNC x 145	120,000 QT	/ 720°C
77	STUDBOLTS	TR2541450R4AA	B16.5	A193-16 B7M	1" UNC x 145	180,000 QT	/ 720°C
78	STUDBOLTS	TR2541450R4AA	B16.5	A193-16 B7M	1" UNC x 145	300,000 QT	/ 720°C
97	BOLTS	VB1270420R4AA	B18.3 T1A	A193-16 B7M	1/2 UNC x 42	150,000 QT	/ 720°C
98	BOLTS	VB1270420R4AA	B18.3 T1A	A193-16 B7M	1/2 UNC x 42	100,000 QT	/ 720°C
99	BOLTS	VB1270420R4AA	B18.3 T1A	A193-16 B7M	1/2 UNC x 42	50,000 QT	/ 720°C

MECHANICAL PROPERTIES



20 SET 2017

57799



1733560012017

bea srl

via dei Ronchi, 91 - 21058 Solbiate Olona (VA) Italy

Capitale Sociale Euro 100.000,00 int. vers. - n° mecc. VA 057235

Cod. Fisc. - P.IVA e Reg. Imp. : 02905380123 REA CCIAA Varese 301154

☎ +39 (0331) 649093 📠 +39 (0331) 649708 ✉ bea@beagroup.com

date 6/09/ 2017

No. 73356 / 001

page 2 / 4

INSPECTION CERTIFICATE

EN 10204 -3.1

MECHANICAL PROPERTIES

Item	Article	UTS MPa	YS 0.2 MPa	E %	R.A. %	HRC min-Max	HB min-Max	HB* 24h	Impact test Kv J	Lateral Exp. mm	Proof Load KN	Test No.
ACTUAL VALUES												
REQUIRED ->		690	550	18,0	50,0		200-235					
ACTUAL VALUES												
44	STUDBOLTS	725	672	18,4	64,9	-----	220-223					
45	STUDBOLTS	725	672	18,4	64,9	-----	220-223					
57	STUDBOLTS	775	735	23,4	63,6	-----	231-234					
58	STUDBOLTS	775	735	23,4	63,6	-----	231-234					
60	STUDBOLTS	775	735	23,4	63,6	-----	231-234					
61	STUDBOLTS	775	735	23,4	63,6	-----	231-234					
62	STUDBOLTS	775	735	23,4	63,6	-----	231-234					
63	STUDBOLTS	823	698	20,2	63,0	-----	233-235					
64	STUDBOLTS	823	698	20,2	63,0	-----	233-235					
65	STUDBOLTS	823	698	20,2	63,0	-----	233-235					
66	STUDBOLTS	823	698	20,2	63,0	-----	233-235					
67	STUDBOLTS	823	698	20,2	63,0	-----	233-235					
68	STUDBOLTS	823	698	20,2	63,0	-----	233-235					
69	STUDBOLTS	823	698	20,2	63,0	-----	233-235					
70	STUDBOLTS	823	698	20,2	63,0	-----	233-235					
71	STUDBOLTS	823	698	20,2	63,0	-----	233-235					
72	STUDBOLTS	823	698	20,2	63,0	-----	233-235					
73	STUDBOLTS	823	698	20,2	63,0	-----	233-235					
74	STUDBOLTS	823	698	20,2	63,0	-----	233-235					
75	STUDBOLTS	823	698	20,2	63,0	-----	233-235					
76	STUDBOLTS	823	698	20,2	63,0	-----	233-235					
77	STUDBOLTS	823	698	20,2	63,0	-----	233-235					
78	STUDBOLTS	823	698	20,2	63,0	-----	233-235					
97	BOLTS	758	602	24,3	62,4	-----	228-229					
98	BOLTS	758	602	24,3	62,4	-----	228-229					
99	BOLTS	758	602	24,3	62,4	-----	228-229					
ACTUAL VALUES												
REQUIRED ->							159-235	159				
ACTUAL VALUES												
04	HEX NUTS					-----	231-233	214			223	POSITIVE
05	HEX NUTS					-----	231-233	214			223	POSITIVE
06	HEX NUTS					-----	231-233	214			223	POSITIVE
ACTUAL VALUES												
REQUIRED ->							159-235	159				
ACTUAL VALUES												



21 SEP 2017



733560012017

bea srl

via dei Ronchi, 91 - 21058 Solbiate Olona (VA) Italy

Capitale Sociale Euro 100.000,00 int. vers. - n° mecc. VA 057235

Cod. Fisc. - P.IVA e Reg. Imp.: 02905380123 REA CCIAA Varese 301154

☎ +39 (0331) 649093 📠 +39 (0331) 649708 ✉ .bea@beagroup.com

date 6/09/ 2017

No. 73356 / 001

page 3 / 4

INSPECTION CERTIFICATE

EN 10204 -3.1

MECHANICAL PROPERTIES

		UTS	YS 0.2	E	R.A.	HRC	HB	HB*	Impact test	Lateral Exp.	Proof Load	Test
		MPa	MPa	%	%	min-Max	min-Max	24h	Kv J	mm	KN	No.
	REQUIRED ->						159-235	159				
Item	Article						ACTUAL VALUES					
18	HEX NUTS					-----	234-235	223			404	POSITIVE
19	HEX NUTS					-----	234-235	223			404	POSITIVE
20	HEX NUTS					-----	234-235	223			404	POSITIVE
21	HEX NUTS					-----	234-235	223			404	POSITIVE
22	HEX NUTS					-----	234-235	223			404	POSITIVE
23	HEX NUTS					-----	234-235	223			404	POSITIVE
24	HEX NUTS					-----	234-235	223			404	POSITIVE
25	HEX NUTS					-----	234-235	223			404	POSITIVE

CHEMICAL ANALYSIS

				C	Mn	Si	P	S	Ni	Cr	Mo
REQUIRED min. ->				0,380	0,750	0,150				0,800	0,150
REQUIRED Max. ->				0,480	1,000	0,350	0,035	0,040		1,100	0,250
		Heat	Heat								
Item	Article	Code	Number	ACTUAL VALUES							
44	STUDBOLTS	----	BB5658	0,430	0,820	0,190	0,009	0,025		1,090	0,160
45	STUDBOLTS	----	BB5658	0,430	0,820	0,190	0,009	0,025		1,090	0,160
57	STUDBOLTS	----	162597	0,430	0,770	0,170	0,014	0,025		1,020	0,220
58	STUDBOLTS	----	162597	0,430	0,770	0,170	0,014	0,025		1,020	0,220
60	STUDBOLTS	----	162597	0,430	0,770	0,170	0,014	0,025		1,020	0,220
61	STUDBOLTS	----	162597	0,430	0,770	0,170	0,014	0,025		1,020	0,220
62	STUDBOLTS	----	162597	0,430	0,770	0,170	0,014	0,025		1,020	0,220
63	STUDBOLTS	----	730199	0,390	0,800	0,220	0,009	0,020		1,020	0,190
64	STUDBOLTS	----	730199	0,390	0,800	0,220	0,009	0,020		1,020	0,190
65	STUDBOLTS	----	730199	0,390	0,800	0,220	0,009	0,020		1,020	0,190
66	STUDBOLTS	----	730199	0,390	0,800	0,220	0,009	0,020		1,020	0,190
67	STUDBOLTS	----	730199	0,390	0,800	0,220	0,009	0,020		1,020	0,190
68	STUDBOLTS	----	730199	0,390	0,800	0,220	0,009	0,020		1,020	0,190
69	STUDBOLTS	----	730199	0,390	0,800	0,220	0,009	0,020		1,020	0,190
70	STUDBOLTS	----	730199	0,390	0,800	0,220	0,009	0,020		1,020	0,190
71	STUDBOLTS	----	730199	0,390	0,800	0,220	0,009	0,020		1,020	0,190
72	STUDBOLTS	----	730199	0,390	0,800	0,220	0,009	0,020		1,020	0,190
73	STUDBOLTS	----	730199	0,390	0,800	0,220	0,009	0,020		1,020	0,190
74	STUDBOLTS	----	730199	0,390	0,800	0,220	0,009	0,020		1,020	0,190
75	STUDBOLTS	----	730199	0,390	0,800	0,220	0,009	0,020		1,020	0,190
76	STUDBOLTS	----	730199	0,390	0,800	0,220	0,009	0,020		1,020	0,190



26 SET 2017



733560012017

bea srl

via dei Ronchi, 91 - 21058 Solbiate Olona (VA) Italy

Capitale Sociale Euro 100.000,00 int. vers. - n° mecc. VA 057235

Cod. Fisc. - P.IVA e Reg. Imp. : 02905380123 REA CCIAA Varese 301154

☎ +39 (0331) 649093 📠 +39 (0331) 649708 📧 .bea@beagroup.com

date 6/09/ 2017

No. 73356 / 001

page 4 / 4

INSPECTION CERTIFICATE

EN 10204 -3.1

CHEMICAL ANALYSIS

			C	Mn	Si	P	S	Ni	Cr	Mo
77	STUDBOLTS	----	730199	0,390	0,800	0,220	0,009	0,020	1,020	0,190
78	STUDBOLTS	----	730199	0,390	0,800	0,220	0,009	0,020	1,020	0,190
97	BOLTS	----	154298	0,430	0,830	0,230	0,015	0,022	1,060	0,150
98	BOLTS	----	154298	0,430	0,830	0,230	0,015	0,022	1,060	0,150
99	BOLTS	----	154298	0,430	0,830	0,230	0,015	0,022	1,060	0,150

		C	Mn	Si	P	S	Ni	Cr	Mo
REQUIRED min. ->		0,400							
REQUIRED Max. ->			1,000	0,400	0,040	0,050			

Item	Article	Heat Code	Heat Number	ACTUAL VALUES						
04	HEX NUTS	----	06384	0,450	0,700	0,210	0,015	0,028		
05	HEX NUTS	----	06384	0,450	0,700	0,210	0,015	0,028		
06	HEX NUTS	----	06384	0,450	0,700	0,210	0,015	0,028		
18	HEX NUTS	----	550328	0,450	0,710	0,240	0,021	0,010		
19	HEX NUTS	----	550328	0,450	0,710	0,240	0,021	0,010		
20	HEX NUTS	----	550328	0,450	0,710	0,240	0,021	0,010		
21	HEX NUTS	----	550328	0,450	0,710	0,240	0,021	0,010		
22	HEX NUTS	----	550328	0,450	0,710	0,240	0,021	0,010		
23	HEX NUTS	----	550328	0,450	0,710	0,240	0,021	0,010		
24	HEX NUTS	----	550328	0,450	0,710	0,240	0,021	0,010		
25	HEX NUTS	----	550328	0,450	0,710	0,240	0,021	0,010		

Note: VISUAL AND DIMENSIONAL TEST = SATISFACTORY

MARKING: "B" OR "BEA" + GRADE OF MATERIAL

MATERIAL ACCORDING WITH NACE MR 0175 / ISO 15156 LATEST EDITION



20 SET. 2017

THE QUALITY MANAGEMENT SYSTEM IS CERTIFIED IN ACCORDANCE WITH:

- ISO 9001 : 2008 BY BUREAU VERITAS (CERTIF.NO. IT243284)
- ANNEX I - PARA 4.3 OF PRESSURE EQUIPMENT DIRECTIVE (97/23/EC) BY BUREAU VERITAS (CERTIF.NO. IT243284/PED 4.3)

The Chemical Analysis results are true and correct copy of the raw material supplier's certificate.

Macroetch examination according to ASTM E381-01 carried out on ferritic steel bars ASTM A193-A194-A540:

all specimens present conditions equivalent to max.S2-R2-C3 and absence of zones of solidifications.

We hereby certify that the fasteners were manufactured, sampled, tested and inspected in accordance with the specification and terms of the order.

* = hardness test after heat treatment at 540/590 °C

**= A=Aged(Hardening Treatment) AN=Annealed/Solution A. CST=Carbide Solution Treated H=Hardened N=Normalized

Q=Quenched-Tempered SB=Stabilized SH=StRAIN Hardened ST=Solution Treated

Q.C. Dept.

A.AIELLO



BALL VALVE TEST RECORD

Date: 7/8/25WO#: Q34656-2

F-580-017, R6

CUST: Energy EquipmentP O #: 250504-2SPEC: Consumers 73700SIZE/CLASS/TYPE: 10" 900 Fig 55END CONNECTION: RFFEVALVE SER #: N25346580101T

TEST MEDIUM: ETHYLENE GLYCOL / WATER SOLUTION

ACTUATOR TYPE: —ACT. SER. #: —CHART ID #: 111694158004GAGE ID #: 6993-3

HYDROSTATIC TEST

SHELL TEST: 3450 psi DURATION: 15 min.TORQUE @ FULL DIFF/MAOP: LEFT: — lb-ft RIGHT: — lb-ft MAX: — lb-ftDBB: — lb-ft DIB1: — lb-ftBREAKOUT @ Full DIFF/MAOP:
(Circle one)LEFT: PASS / FAIL (NA) RIGHT: PASS / FAIL (NA)DBB: PASS / FAIL (NA) DIB1: PASS / FAIL (NA)LEFT SEAT: 2445 psi DURATION: 5 minRIGHT SEAT: 2445 psi DURATION: 5 minDBB: 2445/2445 psi DURATION: 5/5 minDIB-1: 2445 psi DURATION: 5 minopen
closedAll Lube Lines Tested @ — psi for — min.

GAS / AIR TEST

AIR SEAT LEFT: — psi DURATION: — min.AIR SEAT RIGHT: — psi DURATION: — min.DBB AIR: — psi DURATION: — min.DIB-1: — psi DURATION: — min.

By signature QTR certifies the above valve has satisfactorily passed all test indicated on this record.

-No visible leakage or inelastic deformation were evident during shell test

-No visible leakage evident during seat testing per ISO 5208 rate A

QTR [Signature] Date: 7/8/25Print: Jeff SchnackINSP (if Req'd): [Signature] Date: 7/8/25Print: RALPH JOHNSON



Date: 7 / 8 / 25

Chart / Gauge: 111694152004 / 6993-3

WO: 234656-2

Customer: Energy Equipment

PO No: 250504-2

Description: 10" 900 Ftg 55

Serial No: N25346580701T

Tester: MA 5000

Print Name: Steve Schmuck

3rd Party: Ralph Johnson 7/8/25


Print Name: KEITH JOHNSON

Customer:	Energy Equipment	PO#	250504-2
Q#	34656-2	WI#	136-F-003 (Consumers Green)
QTY#		1 Description:	10" 900# RFFE Fig 55 Delta Ball Valve, KE40 Gear w/HW

Surface Preparation

Surface free of Contamination:	Yes	Solvent Cleaned:	SSPC-SP-1
Soluble Salt test:	Yes	Salt test performed:	Potassium Ferricyanide
Blast Pressure:	110 psi	Test Plate:	Yes
Blotter Test:	ASTM D 4285	Abrasive Type:	Medium
Surface Profile Standard:	SSPC-SP-10	Blast Acceptance:	SP-10
Profile required	2-4 mils	Profile Average:	2.9
Testex Tape Sheet Attached:	NA	Blast time:	7-10-25 8:15am

Blast profile Tape

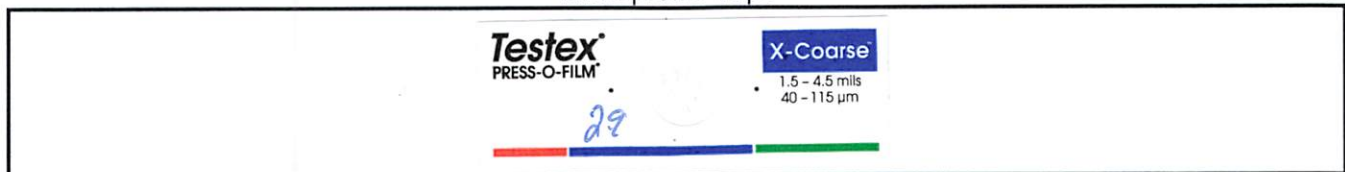

Coating Conditions

Coat	RH%	TA°	TS°	TD°	TsTd°	Date	Time
1st	72.4	86.5	84.1	76.6	7.5	7/10/2025	9:05am
2nd	61.9	85.4	88.2	70.8	17.3	7/11/2025	8:45am
3rd							

Coating Materials

COAT	MANUFACTURER	PAINT	COLOR	BATCH A#	BATCH B#	Temp
1st	Sherwin Williams	Dura-Plate	White	XM3034XJ	XM3534NZ	76°
2nd	Sherwin Williams	Hi-Solids Poly	Consumers Grn	XM0455NU	MQ3584JW	76°
3rd						

Coating DFT

SN#	Stripe	1st Coat	2nd Coat	3rd Coat	4th Coat	Total
N25346580101T		8.1	12.55			12.55

Q34656-2

FINAL INSPECTION

Customer Specification #

Consumers 73700

RESULTS

DFT Avg.	Gauge:	SN#	Cert Date:
12.55	PosiTector	232259	10/23/2025

HOLIDAY TEST

Conducted:	High Voltage	Low Voltage	Voltage
NA			

Gauge:		SN#			Cert Date:

Comments:

Apply 2-part consumers green to a final dft range of 10-16mils min.

Exp. Date:

Dura-Plate 235 A. 10/29/2027 B. 12/18/2026

Hi-Solids Poly S. 2/14/2028 T. 12/23/2026

QTR Inspector: J. B. Bugee Nace Cert# 72547 Date: 7-15-25Customer Inspector: Roger Johnson Nace Cert# 110562 Date: 7-16-26