

# PIPELINE EQUIPMENT, Inc.--Extrusion Division

CUSTOMER: Pipeline Equipment Inc.  
8403 S 89th W Ave  
Tulsa Ok 74131

CUSTOMER JOB NO.: 74769

CUSTOMER P.O. NO.: 74769-04

CUSTOMER PROJECT:

8403 South 89th West Ave.  
Tulsa, Ok. 74131

SPECIFICATION : WPHY-52

HEAT TREATMENT : Normalize

P.E.I.-EXTRUSION JOB NO : 226-001

12" x .500" x 4" SIXH x12" x .500" x  
API5LX-52

## CERTIFICATE OF COMPLIANCE / CONFORMATION REPORT

The finished product was produced in the U.S.A.

225-001 Material manufactured and tested in accordance with purchase order requirements and specification(s).

DESCRIPTION : 12.750" O.D. x .500" Wall x (2) 4.500" O.D. x .337" Wall x API5LX-52

Base Material : Supplied Header material: 12.750" O.D. x .844" Wall x API5LX-52

Heat Treatment : As Required.

Testing : U/T prior to drill

Testing : 52000 Yield

Testing : 66000 Tensile

Testing : Charpy Impacts - Type A - V - Notch per ASTM A-370

Testing : Charpy Impacts Criteria Meeting 20 Foot Pounds Min. Avg. // No Values Below 15 Foot Pounds // @ -20 ° F. Temp.

Testing : PT Extruded Outlet Area 100% per acceptance standards ASME Code, Section VIII, Div.I

Design Conditions : B31.8 ; 1,800 PSIG; 100 °F. Temp.; .000" C.A.; 0.5" D.F.

Comments : Both ends back tapered to .500" wall

MARK NO.: QTY  
MK# 12 x 4 Right Hand 2

DESCRIPTION  
12.750" x .500" x (2) 4" XH x API5LX-52 x 5'-0" Long

SPEC. HEAT SYMBOLS  
WPHY-52 210483


The undersigned certifies, to the best of his (our) knowledge, that the contents of this report is correct and accurate and that all above test results and operations performed are in compliance with requirements of the applicable sections of the above stated specifications and purchase orders.

*Gjlu* 2/23/26


|                         |
|-------------------------|
| TAG: P.O. No.: 74769-04 |
| Job No.: 226-001        |
| Mk. No.: (SEE MK. No.)  |
| Material: WPHY-52       |
| Heat No.: 210483        |

(1) MK. NO.: 12 X 4 Right Hand Kicker-1  
(1) MK. NO.: 12 X 4 Right Hand Kicker-2




RN 2-19-26

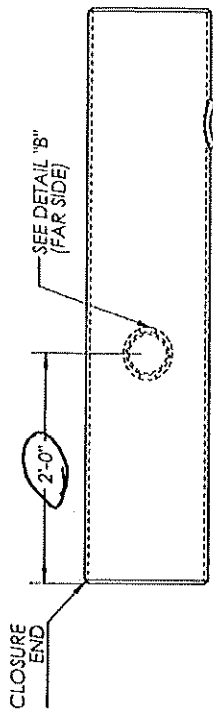

TOP VIEW



FRONT VIEW

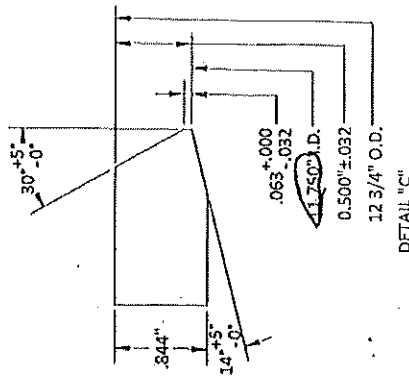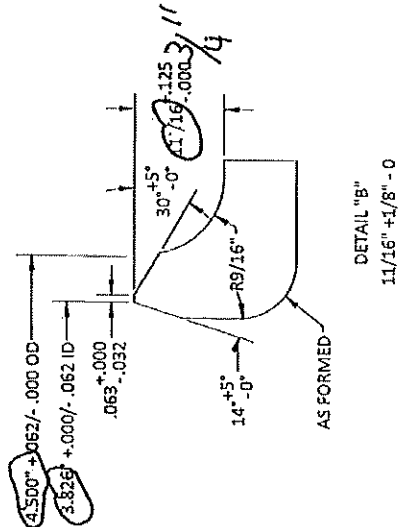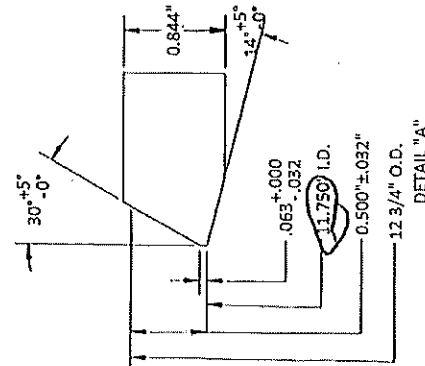

|                                      |
|--------------------------------------|
| NPS: 12" x 500' x 4" XH x 12" x 500" |
| Header Size: 12.750" X 844"          |
| Extrusion Size: 4.500" O.D. X .337"  |
| Material: API 5L X52 WPHY-52         |
| Design Press: 1800 PSIG @ 100° F     |
| Code: B31.8 D.F. 0.5                 |



Extrusion Division


- NOTE:
1. DIE TOLERANCE ± .032.
  2. HEIGHTS EXCEEDING LISTED OUTLET HEIGHT TOLERANCES ARE ALLOWED.
  3. OUTLET LOCATION TOLERANCES ± 1/8".

|                          |
|--------------------------|
| P.E.D. Job No.: 226-001  |
| Customer: PIPELINE       |
| Cust. Ref. No.: 74769-04 |
| Date: 5/5/2025 By: NB    |
| Dwg. No.:                |



|                        |
|------------------------|
| Job No.: 74759-04      |
| Mk. No.: (SEE MK. No.) |
| Material: WPHY-52      |
| Heat No.: 210483       |

- (1) MK. NO.: 12 X 4 Right Hand Kicker-1  
(1) MK. NO.: 12 X 4 Right Hand Kicker-2




RN 2-14-26

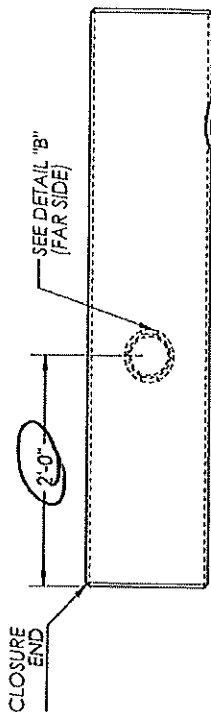

TOP VIEW

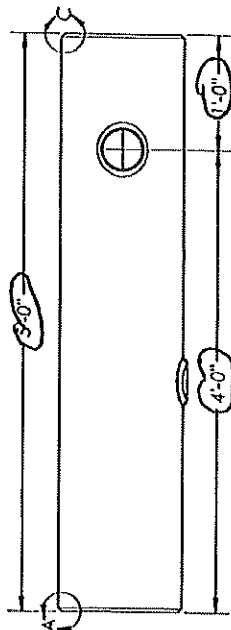

FRONT VIEW

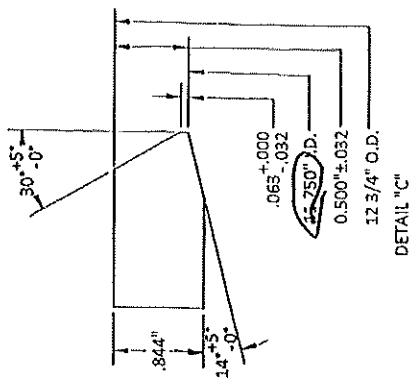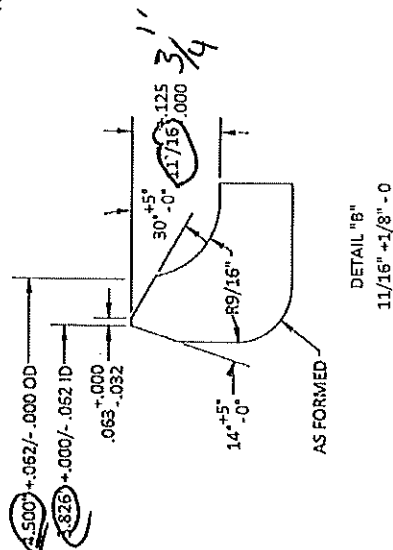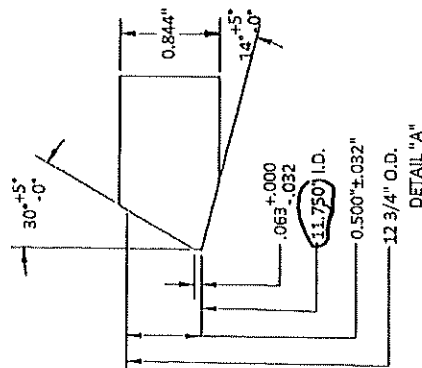

Extrusion Division

NOTE:

1. DIE TOLERANCE ±.032.
2. HEIGHTS EXCEEDING LISTED OUTLET
3. HEIGHT TOLERANCES ARE ALLOWED.
4. OUTLET LOCATION TOLERANCES ±1/8".

|                                        |
|----------------------------------------|
| NPS: 12" x .500" x 4" XH x 12" x .500" |
| Header Size: 12.750" x .844"           |
| Extrusion Size: 4.500" O.D. x .337"    |
| Material: API 5L X52 WPHY-52           |
| Design Press: 1800 PSIG @ 100° F       |
| Code: B31.8 D.F. 0.5                   |

|                          |
|--------------------------|
| P.E.D. Job No.: 226-001  |
| Customer: PIPELINE       |
| Cust. Ref. No.: 74759-04 |
| Date: 5/5/2025 By: NB    |
| Dwg. No.:                |

8403 South 89th West Avenue  
Tulsa, OK 74131

### Dye Penetrant Examination

PEI Job # 226-001

**Customer Name** PFD

**Pipe Size 20" x 1.031"**

**Item Material WPHY-65**

## Method

Solvent Removable ☐

**Water Washable** ☒

Post Emulsifying ☐

**Type**

Visible ☒

Flourescent 

**Purchase Order # 74789-04****Customer Job #**

Date 02/19/26

| Type of Item | Kicker |
|--------------|--------|
|--------------|--------|

Type of Surface Carbon Steel

| Examination Material | Manufacturer | Type      | Batch #  | Minimum Dwell / Dry Time |
|----------------------|--------------|-----------|----------|--------------------------|
| Cleaner              | WATER        |           |          | UNTIL DRY                |
| Penetrant            | Sherwin      | Dubi-Chek | BC34-K47 | 5 MIN.                   |
| Developer            | Sherwin      | Dubi-Chek | BC527-G6 | UNTIL DRY                |

### **Relevant Indications, Evaluation**

[illegible]

Performed In Accordance With ☒ ASME V & ASME VIII Div 1 / ASME VII Div 2

Examiner Robbie Nichols

**ASNT-TC-1A Level II**

☐ Other (specify) \_\_\_\_\_

Date 2-23-26

**Certification Expiration** 04/01/27

Witnessed By G. M.


Date 2/19/26

**Approved By**

Date \_\_\_\_\_

# STRESS TECH

## THERMAL PROCESSING

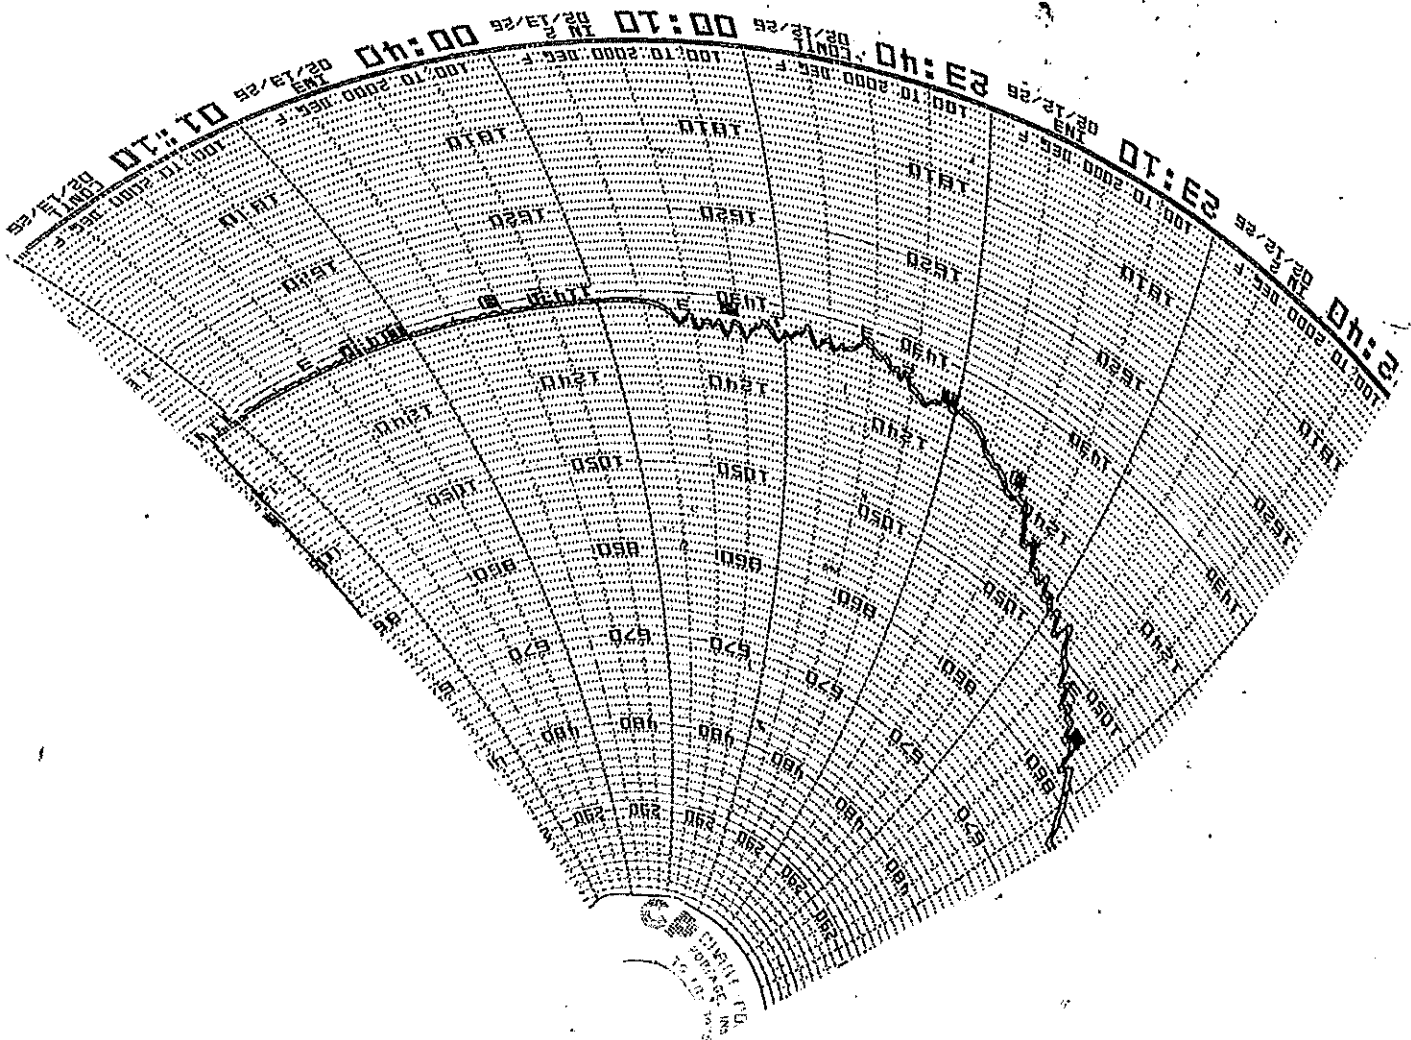



# ULTRASONIC THICKNESS LONGITUDINAL INSPECTION REPORT

US3067-UT5-527  
Page 1 of 1

|                                                                                                                                              |                                    |                                                    |                               |
|----------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|----------------------------------------------------|-------------------------------|
| <b>Procedure:</b> NDT 4.1 Rev 12                                                                                                             |                                    | <b>Client:</b> PIPELINE EQUIPMENT INC              | <b>Date:</b> 2026-Feb-12      |
| <b>Technique:</b> Standard                                                                                                                   |                                    | <b>Apave #:</b> TUN2600518                         | <b>Job #:</b> 226-001         |
| <b>Code/Standard:</b> Customer Specification                                                                                                 |                                    | <b>Item Inspected:</b> Cylinder prior to pulling   | <b>PO #:</b> 226-001          |
| <b>Nominal Thickness:</b> .844 <b>Other:</b> 1.031                                                                                           |                                    | <b>Location:</b> Tulsa                             |                               |
| <b>Material Type:</b> Carbon Steel                                                                                                           | <b>Surface Condition:</b> Polished | <b>Method of Scanning:</b> Continuous scan or grid |                               |
| <b>Probe Model:</b> Olympus                                                                                                                  | <b>Serial #:</b> 122035            | <b>Angle:</b> 0°                                   | <b>Scanning Surface:</b> O.D. |
|                                                                                                                                              |                                    | <b>Type:</b> Single                                | <b>Frequency (MHz):</b> 2.25  |
|                                                                                                                                              |                                    | <b>Crystal Size:</b> 1                             |                               |
| <b>Equipment Manufacturer:</b> Olympus                                                                                                       |                                    | <b>Type:</b> 650                                   | <b>Serial #:</b> 1109091107   |
| <b>Annual Calibration (Linearity) Date:</b> 2025-Jul-15                                                                                      |                                    | <b>Cable Type:</b> RG174                           | <b>Length:</b> 5 Ft           |
| <b>Standardization</b>                                                                                                                       | <b>1) Type:</b> IIW                | <b>Material:</b> 1018 CS                           | <b>Serial #:</b> U23001       |
| <b>Block(s):</b>                                                                                                                             | <b>2) Type:</b> IIW                | <b>Material:</b> 1018 CS                           | <b>Serial #:</b> U23001       |
| <b>Standardization Block Temperature:</b> 65 °F                                                                                              |                                    | <b>Couplant:</b> UTX                               | <b>Batch #:</b> 65-002        |
|                                                                                                                                              |                                    | <b>Reference Gain:</b> 6 db                        |                               |
| <b>Skin Temperature:</b> <input checked="" type="checkbox"/> Below 200 °F <input type="checkbox"/> Over 200 °F    (exact temperature): 60 °F |                                    |                                                    |                               |

**Inspection Results:** No indications found . Ultrasonic inspection is acceptable per customers requirements.

- 1- MK#12 X 4 RHK-1==>12.750" OD X 0.844" WALL X WPHY-52 X 5'0" LONG W/(2) 4" OUTLETS. HT#210483
- 1- MK#12 X 4 RHK-2==>12.750" OD X 0.844" WALL X WPHY-52 X 5'0" LONG W/(2) 4" OUTLETS. HT#210483
- 1- MK#20 X 4 RHK-1==>20" OD X 1.031" WALL X WPHY-65 X 5'0" LONG W/(2) 4" OUTLETS. HT#945427
- 1- MK#20 X 4 RHK-2==>20" OD X 1.031" WALL X WPHY-65 X 5'0" LONG W/(2) 4" OUTLETS. HT#945427

|                                 |                    |                      |                                                    |
|---------------------------------|--------------------|----------------------|----------------------------------------------------|
| <b>Remarks/Limitations:</b>     |                    |                      |                                                    |
| <b>Personnel:</b> Mike Carman   |                    | <b>Consumables:</b>  |                                                    |
| <b>Interpretation By:</b> _____ | <b>Mike Carman</b> | <b>SNT-TC-1A:</b> II | <b>Client Representative:</b> _____                |
| (Print)                         |                    | (Level)              | (Print)                                            |
| (Sign)                          | <i>MC</i>          | <b>CERT #:</b> 336   | I am in full agreement with report contents. _____ |
|                                 |                    |                      | (Sign)                                             |

Our Core Values revolve around our Safety and Quality Practices. We will always take care of our employees and customers.

1-855-567-5511

www.irisndt.com

info.us@irisndt.com