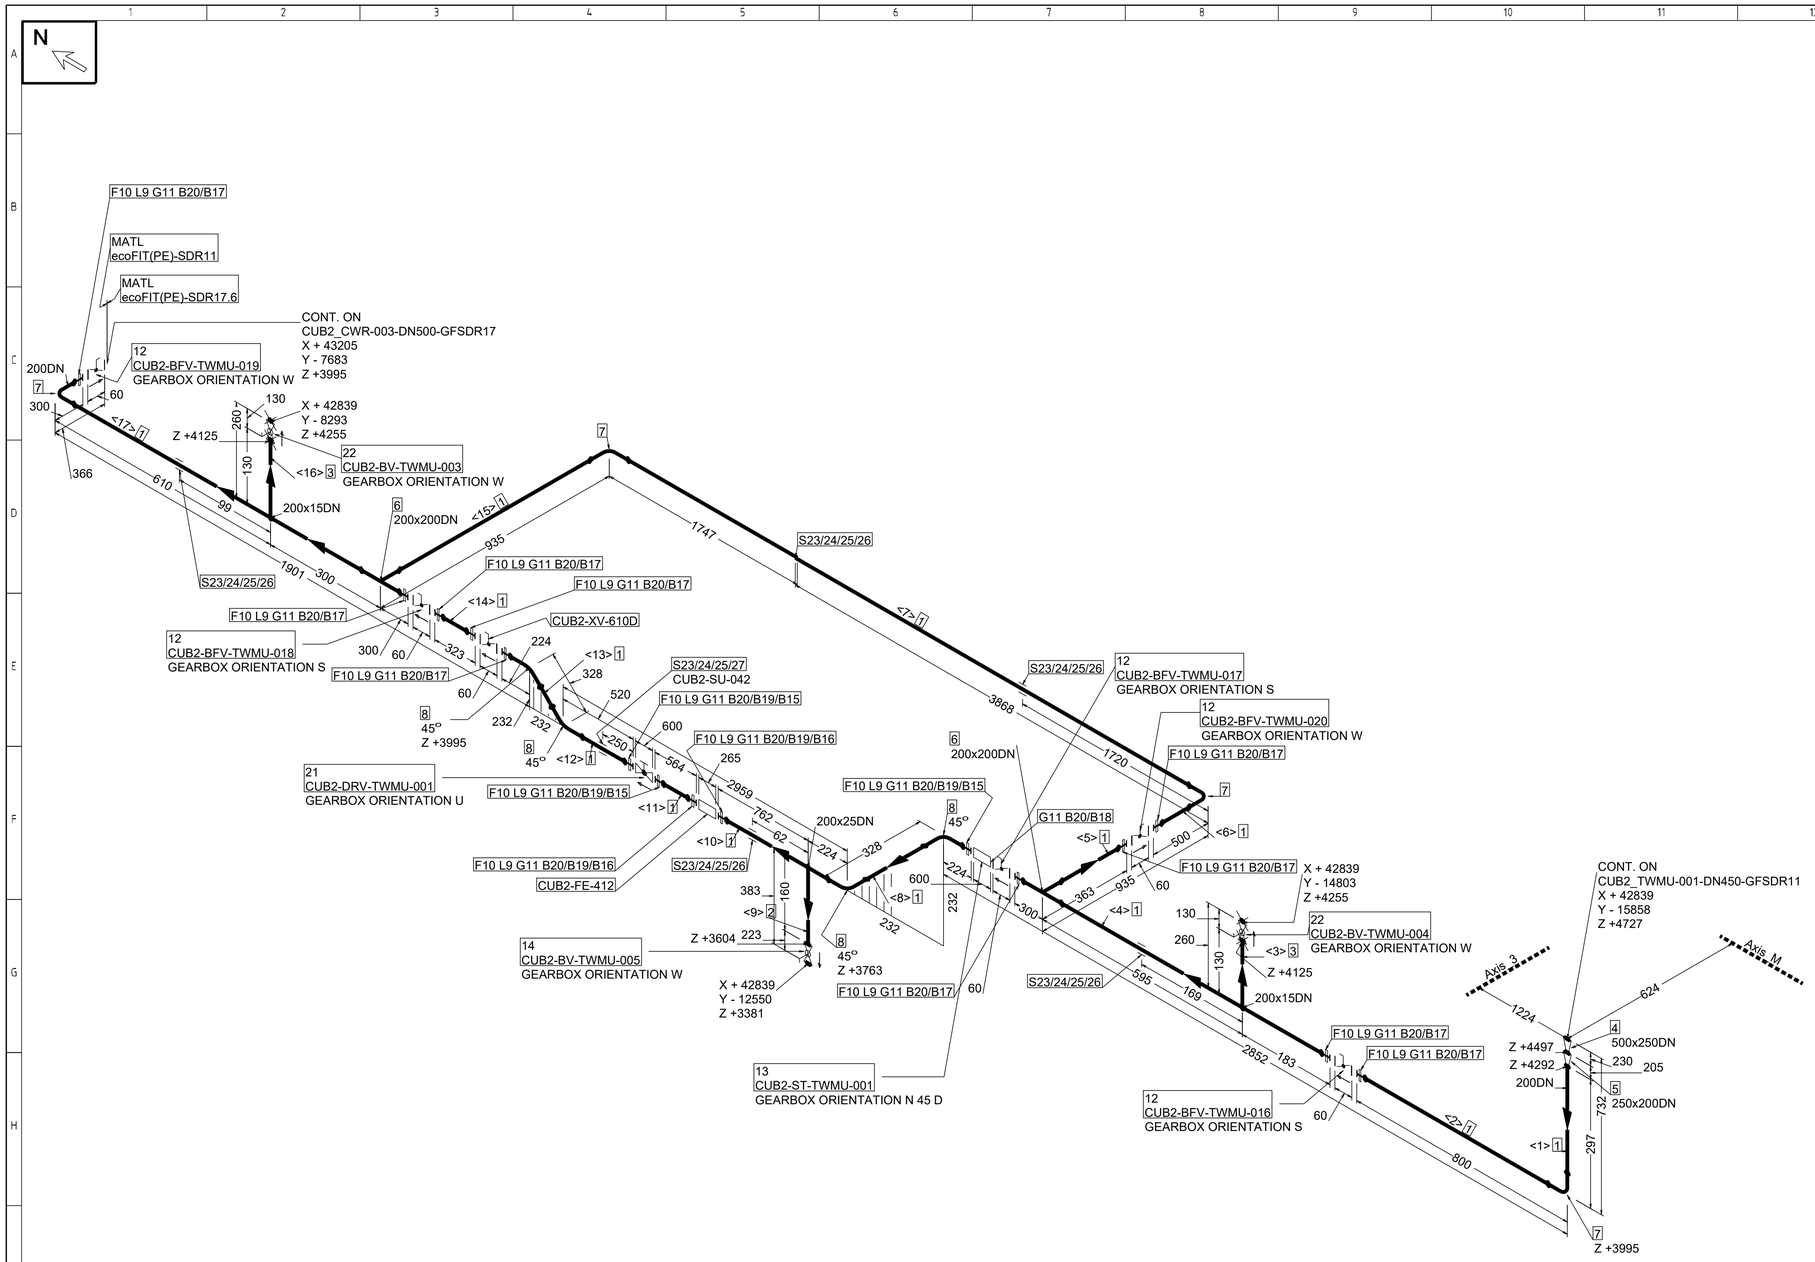

MATERIAL

Pos No.	Description	Material	DN (MM)	Qty.
	PIPE			
1	ecoFIT pipe SDR11 DN200 - 200x18.2 - PN16 PE100	PE100	200	9303MM
2	ecoFIT pipe SDR11 DN25 - 32x2.9 - PN16 PE100	PE100	25	52MM
3	ecoFIT pipe SDR11 DN15 - 20x1.9 - PN16 PE100	PE100	15	60MM
	FITTINGS			
4	ecoFIT reducer SDR11 DN500 - DN250 - 450x40.9 - 280x25.4 PE100	PE100	500 x 250	1
5	ecoFIT reducer SDR11 DN250 - DN200 - 280x25.4 - 200x18.2 PE100	PE100	250 x 200	1
6	ecoFIT tee 90° equal SDR11 DN200 - DN200 - 200x18.2 - 200x18.2 PE100	PE100	200 x 200	2
7	ecoFIT bend 90° SDR11 DN200 - 200x18.2 PE100	PE100	200	4
8	ecoFIT elbow 45° SDR11 DN200 - 200x18.2 PE100	PE100	200	4
	FLANGES			
9	ecoFIT flange adaptor SDR11, metric DN200 - 200x18.2 PE100	PE100	200	15
10	Profiled Backing Flange, PP-Steel For butt fusion systems metric, DN200 - 200x0 PP-STEEL	PP-STEEL	200	15
	GASKETS			
11	Profile Flange Gasket metric EPDM DN200 - 200 - PN16 EPDM	EPDM	200	16
	VALVES / IN-LINE ITEMS			
12	Metal-Butterfly valve type 038 reduction gear with handwheel IC EPDM DN200 - 225 - PN16		200	5
13	Strainer - flanged - PN10 - DN200		200	1
14	Ball Valve 546, BF spigots long PE100 SDR11, EPDM DN25 - 32x2.9 - PN10 PE100	PE100	25	1

MATERIAL

Pos No.	Description	Material	DN (MM)	Qty.
	BOLTS			
15	Hexagon Screw BS4190 - M20 x 130 - 8.8		20	36
16	Hexagon Screw BS4190 - M20 x 120 - 8.8		20	24
17	Hexagon Screw BS4190 - M20 x 90 - 8.8		20	120
18	Hexagon Screw BS4190 - M20 x 55 - 8.8		20	12
19	Hex Nut BS4190 - M20 - 8		20	60
20	Washer BS4190 - M20 - Steel zinced		20	252
	VALVES / IN-LINE ITEMS			
21	Double regulating valve - OVENTROP - PN16 - flanged - DN200		200	1
22	Ball Valve 546, BF spigots PE100 SDR11, EPDM DN15 - 20x1.9 - PN10		15	2
	SUPPORTS			
23	PIPE CLAMP C LK 220; ARTICLE NO. 113114		200	6
	MISCELLANEOUS COMPONENTS			
24	LOAD CHAIN LKV M16; ARTICLE NO. 113921		16	6
25	THREADED ROD GST HCP M16NO LENGTH AVAILABLE; ARTICLE NO. 114844		16	6
26	BEAM CONNECTION LKA-A 161/300 M16; ARTICLE NO. 115838		16	5
27	HANGING PLATE HP F 80 - A M16; ARTICLE NO. 113025		16	1

CUT PIPE LENGTH

PIECE NO	CUT LENGTH	DN (MM)	REMARKS	PIECE NO	CUT LENGTH	DN (MM)	REMARKS
<1>	97	200		<2>	500	200	
<3>	30	15		<4>	478	200	SETON TEE
<5>	63	200		<6>	200	200	
<7>	3668	200		<8>	80	200	
<9>	52	25		<10>	762	200	SETON TEE
<11>	364	200		<12>	296	200	
<13>	80	200		<14>	123	200	
<15>	535	200		<16>	1547	200	
<17>	30	15		<18>	510	200	SETON TEE

Insulation Specification:

Pipe Number: CUB2_TWMU-002-DN200-GFSDR11

Specification: ecoFIT(PE)-SDR11

Medium:

Pipe data, Inspection Instruction see Pipelist:

X... Part-No.	X.. Support No.
SPLx... Spool-No.	... Field weld (FW)
X... Joint No.	... Shop weld (SW)

Fabricationtolerances acc. EN-ISO-13920

Limits for		
Longitudinal dimensions	Angular dimensions	Straightness-, Flatness- and Parallelismtolerances
Toleranceclass A	Toleranceclass A	Toleranceclass E

+Z Up, +Y North, +X East, -X West, -Y South, -Z Down

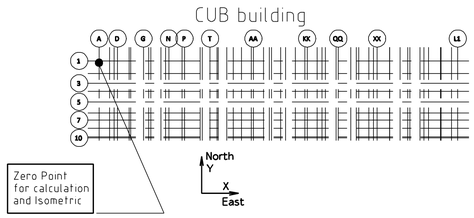

PROTECTION MARK DIN ISO 16016

Rev.	date	drawn	checked	approved	description
0	2020-03-13	Kopacka	Wagner		first issue

ZAUNER ANLAGENTECHNIK

Zauner Anlagentechnik GmbH
A-4702 Wallern
Mauer 20 / Gewerbepark

FLUOR®

Fluor Consultants B.V,
sivullike Suomessa
FI-00181 Helsinki
Porkkalankatu 24

project : LPP 5A - K007 - Mechanical & Piping

drawing title : Piping Isometric

CUB2_TWMU-002-DN200-GFSDR11

Sheet no. 1/1

Revision 0

CAD-NR :

IERS F.I

IERS D.I

A1

cad system PDMS / E3D