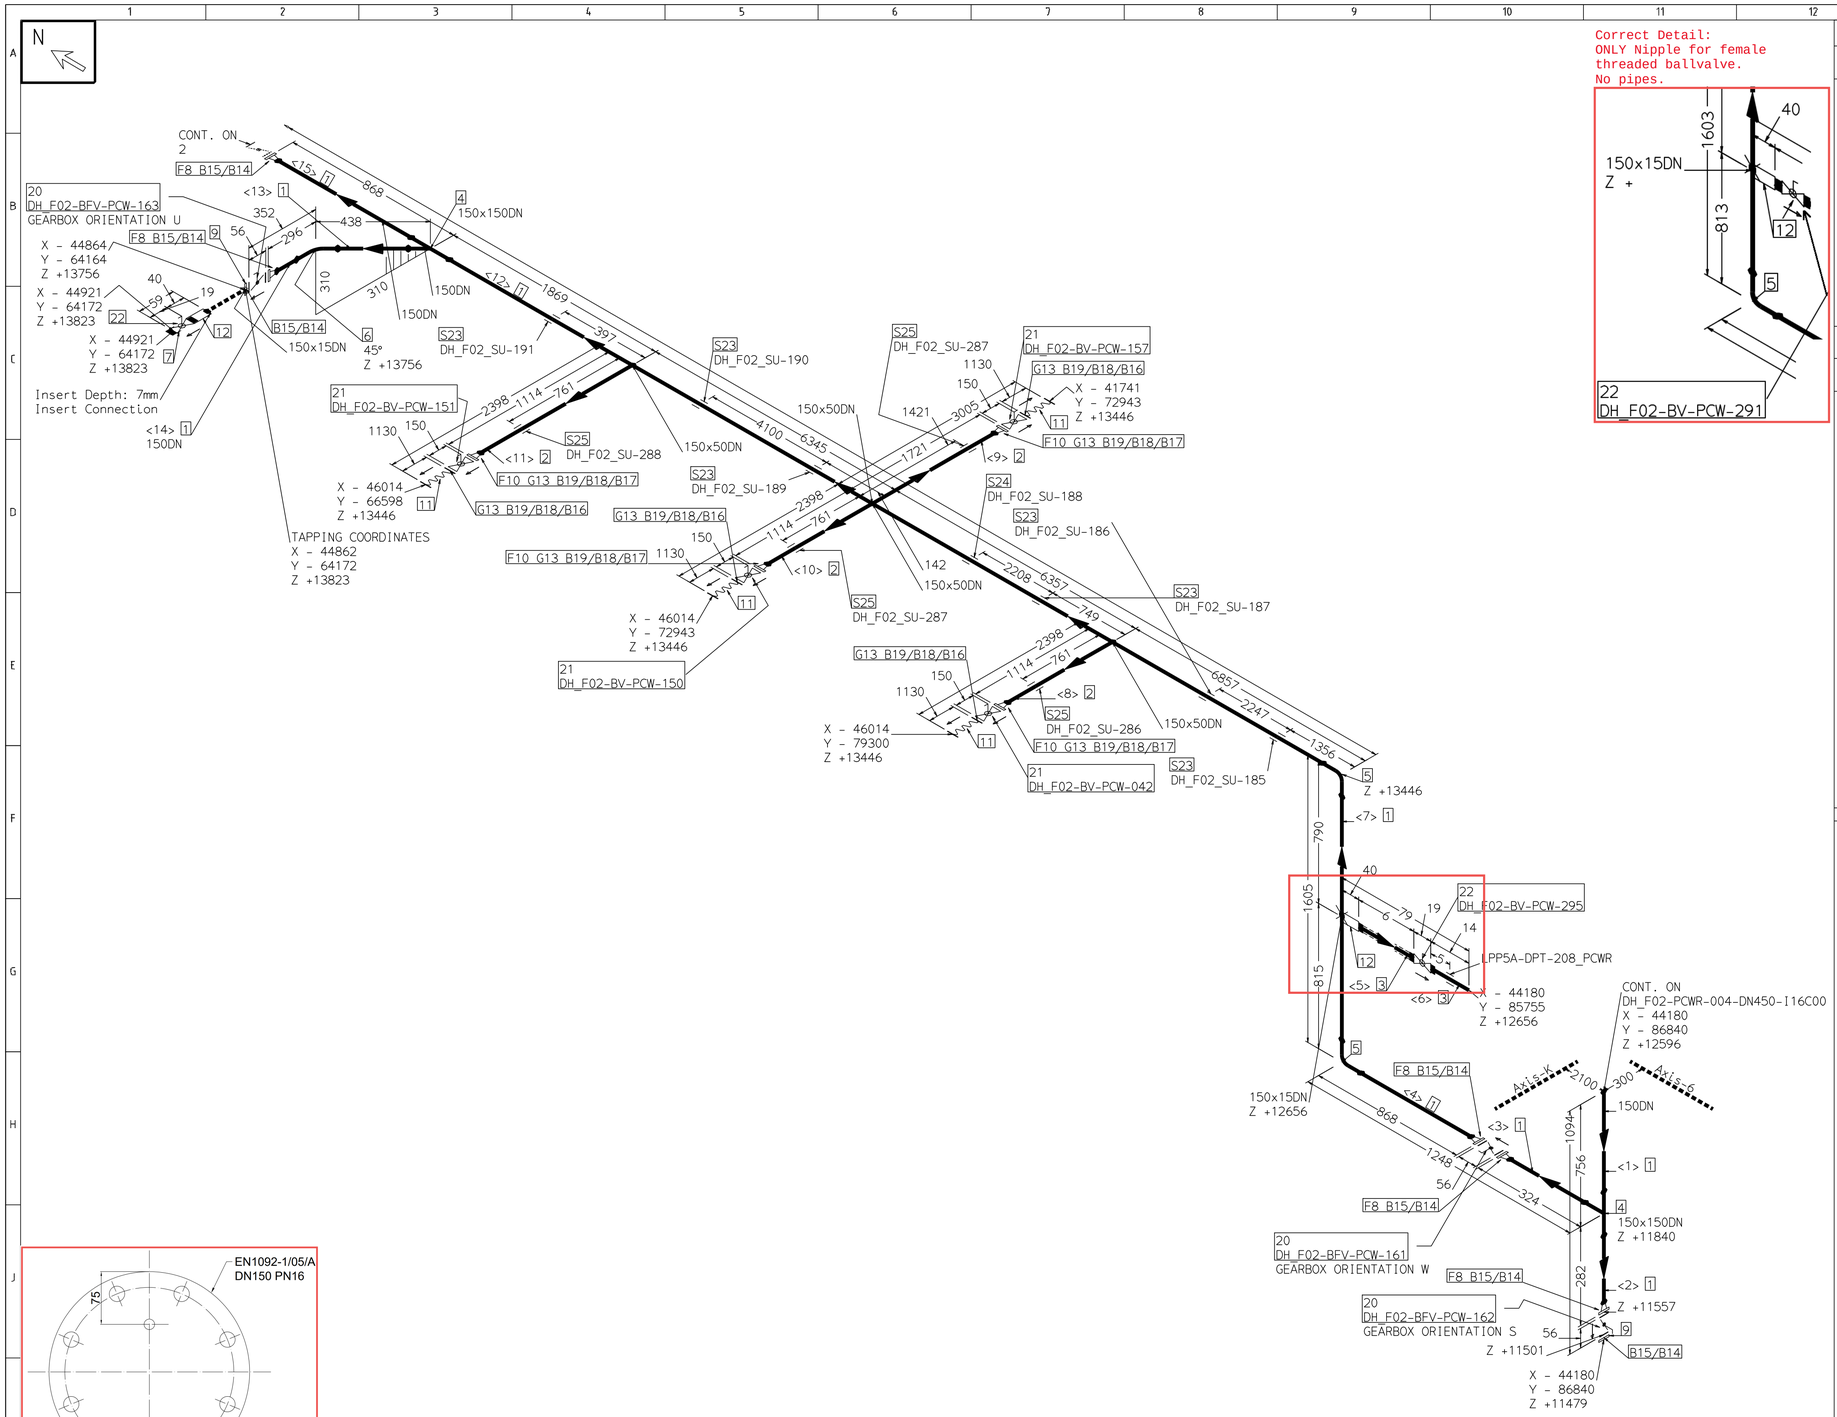

Correct Detail:
ONLY Nipple for female threaded ballvalve.
No pipes.



MATERIAL

Pos No.	Description	Material	DN (MM)	Qty.
	PIPE			
1	Carbon steel pipe - EN10217-2 - 168.3x4.5 P235GH	P235GH	150	24626MM
2	Carbon steel pipe - EN10217-2 - 60.3x2.9 P235GH	P235GH	50	4567MM
3	Carbon steel pipe - EN10217-2 - 21.3x2 P235GH	P235GH	15	20MM
	FITTINGS			
4	Tee - EN10253-1 - Type A - 168.3x4.5/168.3x4.5 P235GH	P235GH	150 x 150	2
5	Elbow - EN10253-2 - Typ A - Model 3D - 90deg - 168.3x4.5 P235GH	P235GH	150	2
6	Elbow - EN10253-2 - Typ A - Model 3D - 45deg - 168.3x4.5 P235GH	P235GH	150	1
7	PLUG - EN10241 - T9 - Fig.290 - DN15 P235GH	P235GH	15	1
	FLANGES			
8	Welding Neck Flange, EN1092-1/11/B1, PN16, DN150 P250GH	P250GH	150	5
9	Blindflange, EN1092-1/05/A, PN16, DN150 P265GH	P265GH	150	2
10	Welding Neck Flange, EN1092-1/11/B1, PN16, DN50 P250GH	P250GH	50	4

MATERIAL

Pos No.	Description	Material	DN (MM)	Qty.
	FITTINGS			
11	Stainless steel hose - Mason Industries Typ FFL2B-SP L=950mm - PN16 - DN50		50	4
12	Welding nipple - EN10241 - DN15 - L=40mm P235GH	P235GH	15	2
	GASKETS			
13	Flat sealing EN1514-1, Form IBC, PN16, 2mm - DN50 Klingersil C-4400	Klingersil C-4400	50	8
	BOLTS			
14	Hexagon Screw BS4190 - M20 x 45 - 5.6		20	56
15	Washer BS4190 - M20 - Steel zinced		20	56
16	Hexagon Screw BS4190 - M16 x 75 - 5.6		16	16
17	Hexagon Screw BS4190 - M16 x 65 - 5.6		16	16
18	Hexagon Nut BS4190 - M16 - 5		16	32
19	Washer BS4190 - M16 - Steel zinced		16	64
	VALVES / IN-LINE ITEMS			
20	Butterfly valve - AICHHORN - fully lugged - handlever - PN16 - DN150		150	3
21	Ball Valve - Flanged - for Hyena - hand lever - DN50		50	4
22	Ball valve - ISIS art. 2411 - screwed - hand lever - DN15		15	2
	SUPPORTS			
23	ASSEMBLY GROUP BG51-F80; ARTICLE NO. 112742		150	6
24	ASSEMBLY GROUP BG52-DN150; ARTICLE NO. 114666		150	1
25	ASSEMBLY GROUP BG92-MS41-M10-50-0, DN50+0mm Insul.		50	4

CUT PIPE LENGTH

PIECE NO	CUT LENGTH	DN (MM)	REMARKS	PIECE NO	CUT LENGTH	DN (MM)	REMARKS
<1>	613	150		<2>	84	150	
<3>	126	150		<4>	584	150	
<5>	6	15		<6>	14	15	
<7>	1147	150	SETON TEE	<8>	990	50	
<9>	1597	50		<10>	990	50	
<11>	990	50		<12>	21056	150	SETON TEE
<13>	200	150		<14>	146	150	
<15>	670	150					

Insulation Specification:

Pipe Number:	DH_F02-PCWR-022-DN150-I16C00
Specification:	I16C00
Medium:	
Pipe data, Inspection Instruction see Pipelist:	

[X]... Part-No. (X).. Support No.
[SPLx].. Spool-No. ... Field weld (FW)
(X)... Joint No. ... Shop weld (SW)

Fabricationtolerances acc. EN-ISO-13920

Limits for		
Longitudinal dimensions	Angular dimensions	Straightness-, Flatness- and Parallelismtolerances
Toleranceclass A	Toleranceclass A	Toleranceclass E

+Z Up, +Y North, +X East, -X West, -Y South, -Z Down

DC building

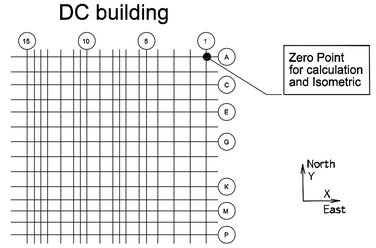

PROTECTION MARK DIN ISO 16016

Rev.	date	drawn	checked	approved	description
0	2024-10-18	TBH-H	TBH-A		first issue

ZAUNER ANLAGENTECHNIK
Zauner Anlagentechnik GmbH
A-4702 Wallern
Mauer 20 / Gewerbepark

exyte
Fluor Consultants B.V,
sivuliike Suomessa
FI-00181 Helsinki
Porkkalankatu 24

project : LPP 6A - K007 - Mechanical & Piping

drawing title : Piping Isometric

DH_F02-PCWR-022-DN150-I16C00

Sheet no. 1/3 | Revision 0

CAD-NR.: | (ERS.F.:) | (ERS.D.:)

A1

cad system PDMS/ E3D

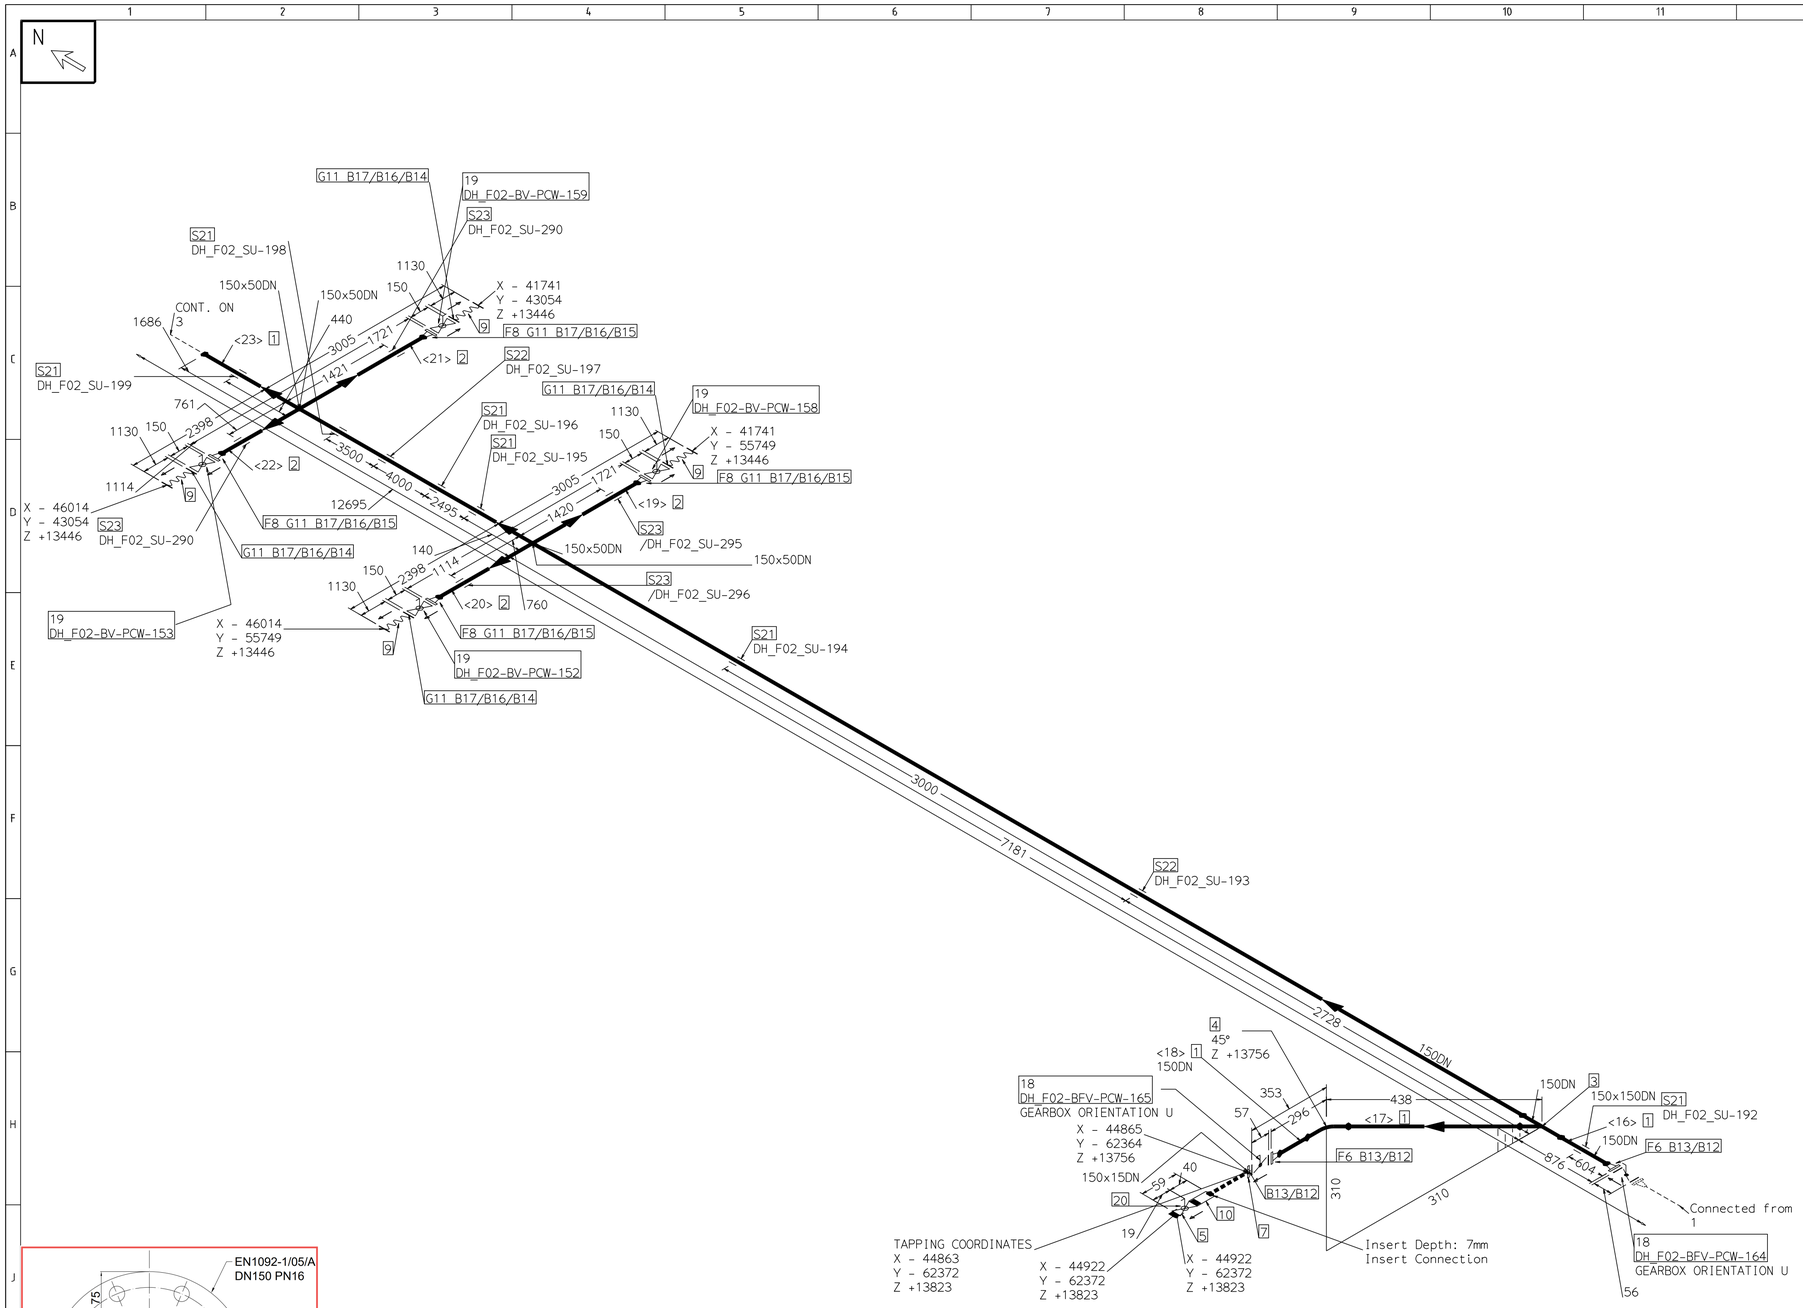



MATERIAL

Pos No.	Description	Material	DN (MM)	Qty.
	PIPE			
1	Carbon steel pipe - EN10217-2 - 168.3x4.5 P235GH	P235GH	150	22443MM
2	Carbon steel pipe - EN10217-2 - 60.3x2.9 P235GH	P235GH	50	5174MM
	FITTINGS			
3	Tee - EN10253-1 - Type A - 168.3x4.5/168.3x4.5 P235GH	P235GH	150 x 150	1
4	Elbow - EN10253-2 - Typ A - Model 3D - 45deg - 168.3x4.5 P235GH	P235GH	150	1
5	PLUG - EN10241 - T9 - Fig.290 - DN15 P235GH	P235GH	15	1
	FLANGES			
6	Welding Neck Flange, EN1092-1/11/B1, PN16, DN150 P250GH	P250GH	150	2
7	Blindflange, EN1092-1/05/A, PN16, DN150 P265GH	P265GH	150	1
8	Welding Neck Flange, EN1092-1/11/B1, PN16, DN50 P250GH	P250GH	50	4

MATERIAL

Pos No.	Description	Material	DN (MM)	Qty.
	FITTINGS			
9	Stainless steel hose - Mason Industries Typ FFL2B-SP L=950mm - PN16 - DN50		50	4
10	Welding nipple - EN10241 - DN15 - L=40mm P235GH	P235GH	15	1
	GASKETS			
11	Flat sealing EN1514-1, Form IBC, PN16, 2mm - DN50 Klingersil C-4400	Klingersil C-4400	50	8
	BOLTS			
12	Hexagon Screw BS4190 - M20 x 45 - 5.6		20	24
13	Washer BS4190 - M20 - Steel zinced		20	24
14	Hexagon Screw BS4190 - M16 x 75 - 5.6		16	16
15	Hexagon Screw BS4190 - M16 x 65 - 5.6		16	16
16	Hexagon Nut BS4190 - M16 - 5		16	32
17	Washer BS4190 - M16 - Steel zinced		16	64
	VALVES / IN-LINE ITEMS			
18	Butterfly valve - AICHHORN - fully Lugged - handlever - PN16 - DN150		150	2
19	Ball Valve - Flanged - for Hyena - hand Lever - DN50		50	4
20	Ball valve - ISIS art. 2411 - screwed - hand lever - DN15		15	1
	SUPPORTS			
21	ASSEMBLY GROUP BG51-F80; ARTICLE NO. 112742		150	6
22	ASSEMBLY GROUP BG52-DN150; ARTICLE NO. 114666		150	2
23	ASSEMBLY GROUP BG92-MS41-M10-50-0, DN50+0mm Insul.		50	4

CUT PIPE LENGTH

PIECE NO	CUT LENGTH	DN (MM)	REMARKS	PIECE NO	CUT LENGTH	DN (MM)	REMARKS
<16>	678	150		<17>	200	150	
<18>	146	150		<19>	1597	50	
<20>	990	50		<21>	1597	50	
<22>	990	50		<23>	21419	150	SETON TEE

Insulation Specification:

Pipe Number: DH_F02-PCWR-022-DN150-I16C00

Specification: I16C00

Medium:

Pipe data, Inspection Instruction

see Pipelist:

X ...	Part-No.	X ...	Support No.
SPLX ...	Spool-No.	X ...	Field weld (FW)
X ...	Joint No.	● ...	Shop weld (SW)

Fabricationtolerances acc. EN-ISO-13920

Limits for		
Longitudinal dimensions	Angular dimensions	Straightness-, Flatness- and Parallelismtolerances
Toleranceclass A	Toleranceclass A	Toleranceclass E

+Z Up, +Y North, +X East, -X West, -Y South, -Z Down

DC building

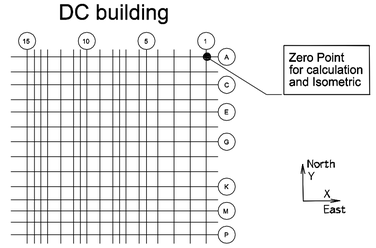

PROTECTION MARK DIN ISO 16016

Rev.	date	drawn	checked	approved	description
0	2024-10-18	TBH-H	TBH-A		first issue

ZAUNER ANLAGENTECHNIK

Zauner Anlagentechnik GmbH
A-4702 Wallern
Mauer 20 / Gewerbepark

exyte

Fluor Consultants B.V,
sivuliike Suomessa
FI-00181 Helsinki
Porkkalankatu 24

project : LPP 6A - K007 - Mechanical & Piping

drawing title : Piping Isometric

DH_F02-PCWR-022-DN150-I16C00

Sheet no. 2/3

Revision 0

CAD-NR.: (ERS.F.:) (ERS.D.:)

A1

cad system PDMS/ E3D

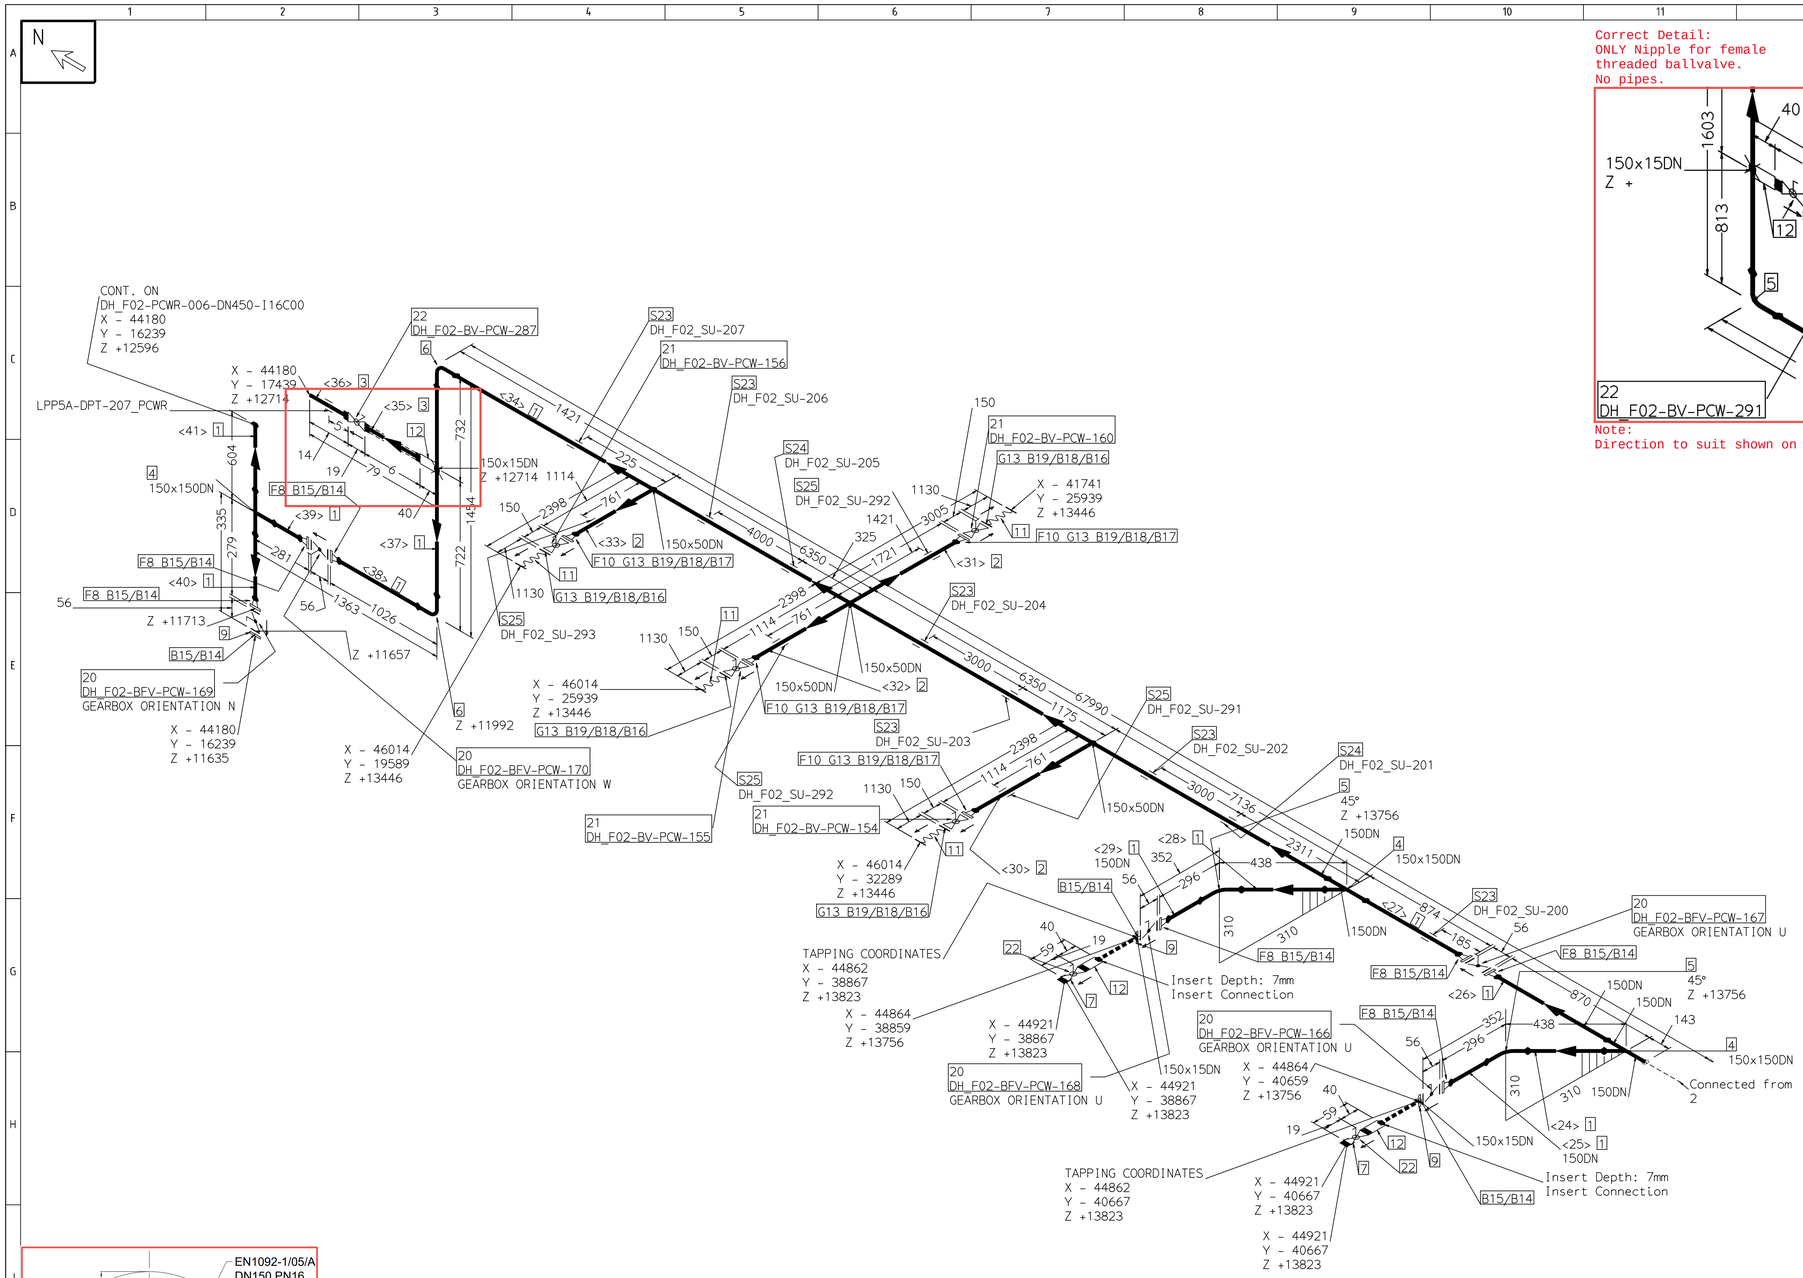

Correct Detail:
ONLY Nipple for female threaded ballvalve.
No pipes.

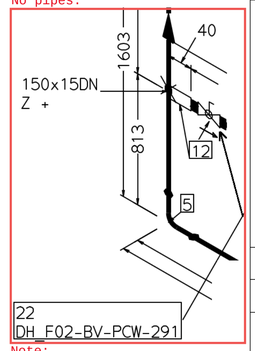

Note:
Direction to suit shown on ISO.

MATERIAL

Pos No.	Description	Material	DN (MM)	Qty.
	PIPE			
1	Carbon steel pipe - EN10217-2 - 168.3x4.5 P235GH	P235GH	150	25288MM
2	Carbon steel pipe - EN10217-2 - 60.3x2.9 P235GH	P235GH	50	4567MM
3	Carbon steel pipe - EN10217-2 - 21.3x2 P235GH	P235GH	15	20MM
	FITTINGS			
4	Tee - EN10253-1 - Type A - 168.3x4.5/168.3x4.5 P235GH	P235GH	150 x 150	3
5	Elbow - EN10253-2 - Typ A - Model 3D - 45deg - 168.3x4.5 P235GH	P235GH	150	2
6	Elbow - EN10253-2 - Typ A - Model 3D - 90deg - 168.3x4.5 P235GH	P235GH	150	2
7	PLUG - EN10241 - T9 - Fig.290 - DN15 P235GH	P235GH	15	2
	FLANGES			
8	Welding Neck Flange, EN1092-1/11/B1, PN16, DN150 P250GH	P250GH	150	7
9	Blindflange, EN1092-1/05/A, PN16, DN150 P265GH	P265GH	150	3
10	Welding Neck Flange, EN1092-1/11/B1, PN16, DN50 P250GH	P250GH	50	4

MATERIAL

Pos No.	Description	Material	DN (MM)	Qty.
	FITTINGS			
11	Stainless steel hose - Mason Industries Typ FFL2B-SP L=950mm - PN16 - DN50		50	4
12	Welding nipple - EN10241 - DN15 - L=40mm P235GH	P235GH	15	3
	GASKETS			
13	Flat sealing EN1514-1, Form IBC, PN16, 2mm - DN50 Klingersil C-4400	Klingersil C-4400	50	8
	BOLTS			
14	Hexagon Screw BS4190 - M20 x 45 - 5.6		20	80
15	Washer BS4190 - M20 - Steel zinced		20	80
16	Hexagon Screw BS4190 - M16 x 75 - 5.6		16	16
17	Hexagon Screw BS4190 - M16 x 65 - 5.6		16	16
18	Hexagon Nut BS4190 - M16 - 5		16	32
19	Washer BS4190 - M16 - Steel zinced		16	64
	VALVES / IN-LINE ITEMS			
20	Butterfly valve - AICHHORN - fully lugged - handlever - PN16 - DN150		150	5
21	Ball Valve - Flanged - for Hyena - hand lever - DN50		50	4
22	Ball valve - ISIS art. 2411 - screwed - hand lever - DN15		15	3
	SUPPORTS			
23	ASSEMBLY GROUP BG51-F80; ARTICLE NO. 112742		150	6
24	ASSEMBLY GROUP BG52-DN150; ARTICLE NO. 114666		150	2
25	ASSEMBLY GROUP BG92-MS41-M10-50-0, DN50+0mm Insul.		50	4

CUT PIPE LENGTH

PIECE NO	CUT LENGTH	DN (MM)	REMARKS	PIECE NO	CUT LENGTH	DN (MM)	REMARKS
<24>	200	150		<25>	146	150	
<26>	672	150		<27>	676	150	
<28>	200	150		<29>	146	150	
<30>	990	50		<31>	1597	50	
<32>	990	50		<33>	990	50	
<34>	20885	150	SETON TEE	<35>	6	15	
<36>	14	15		<37>	996	150	SETON TEE
<38>	742	150		<39>	83	150	
<40>	81	150		<41>	461	150	



Insulation Specification:

Pipe Number:	DH_F02-PCWR-022-DN150-I16C00
Specification:	I16C00
Medium:	

Pipe data, Inspection Instruction
see Pipelist:

X ...	Part-No.	X ..	Support No.
SPLx ..	Spool-No.	...	Field weld (FW)
X ...	Joint No.	...	Shop weld (SW)

Fabricationtolerances acc. EN-ISO-13920

Limits for		
Longitudinal dimensions	Angular dimensions	Straightness-, Flatness- and Parallelismtolerances
Toleranceclass A	Toleranceclass A	Toleranceclass E



DC building

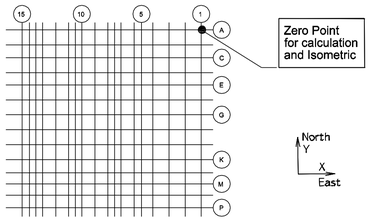

PROTECTION MARK DIN ISO 16016

Rev.	date	drawn	checked	approved	description
0	2024-10-18	TBH-H	TBH-A		first issue

ZAUNER ANLAGENTECHNIK
Zauner Anlagentechnik GmbH
A-4702 Wallern
Mauer 20 / Gewerbepark

exyte
Fluor Consultants B.V,
sivuliike Suomessa
FI-00181 Helsinki
Porkkalankatu 24

project : LPP 6A - K007 - Mechanical & Piping

drawing title : Piping Isometric

DH_F02-PCWR-022-DN150-I16C00

Sheet no. 3/3 | Revision 0

CAD-NR.: | (ERS.F.:) | (ERS.D.:)

A1

cad system PDMS/ E3D