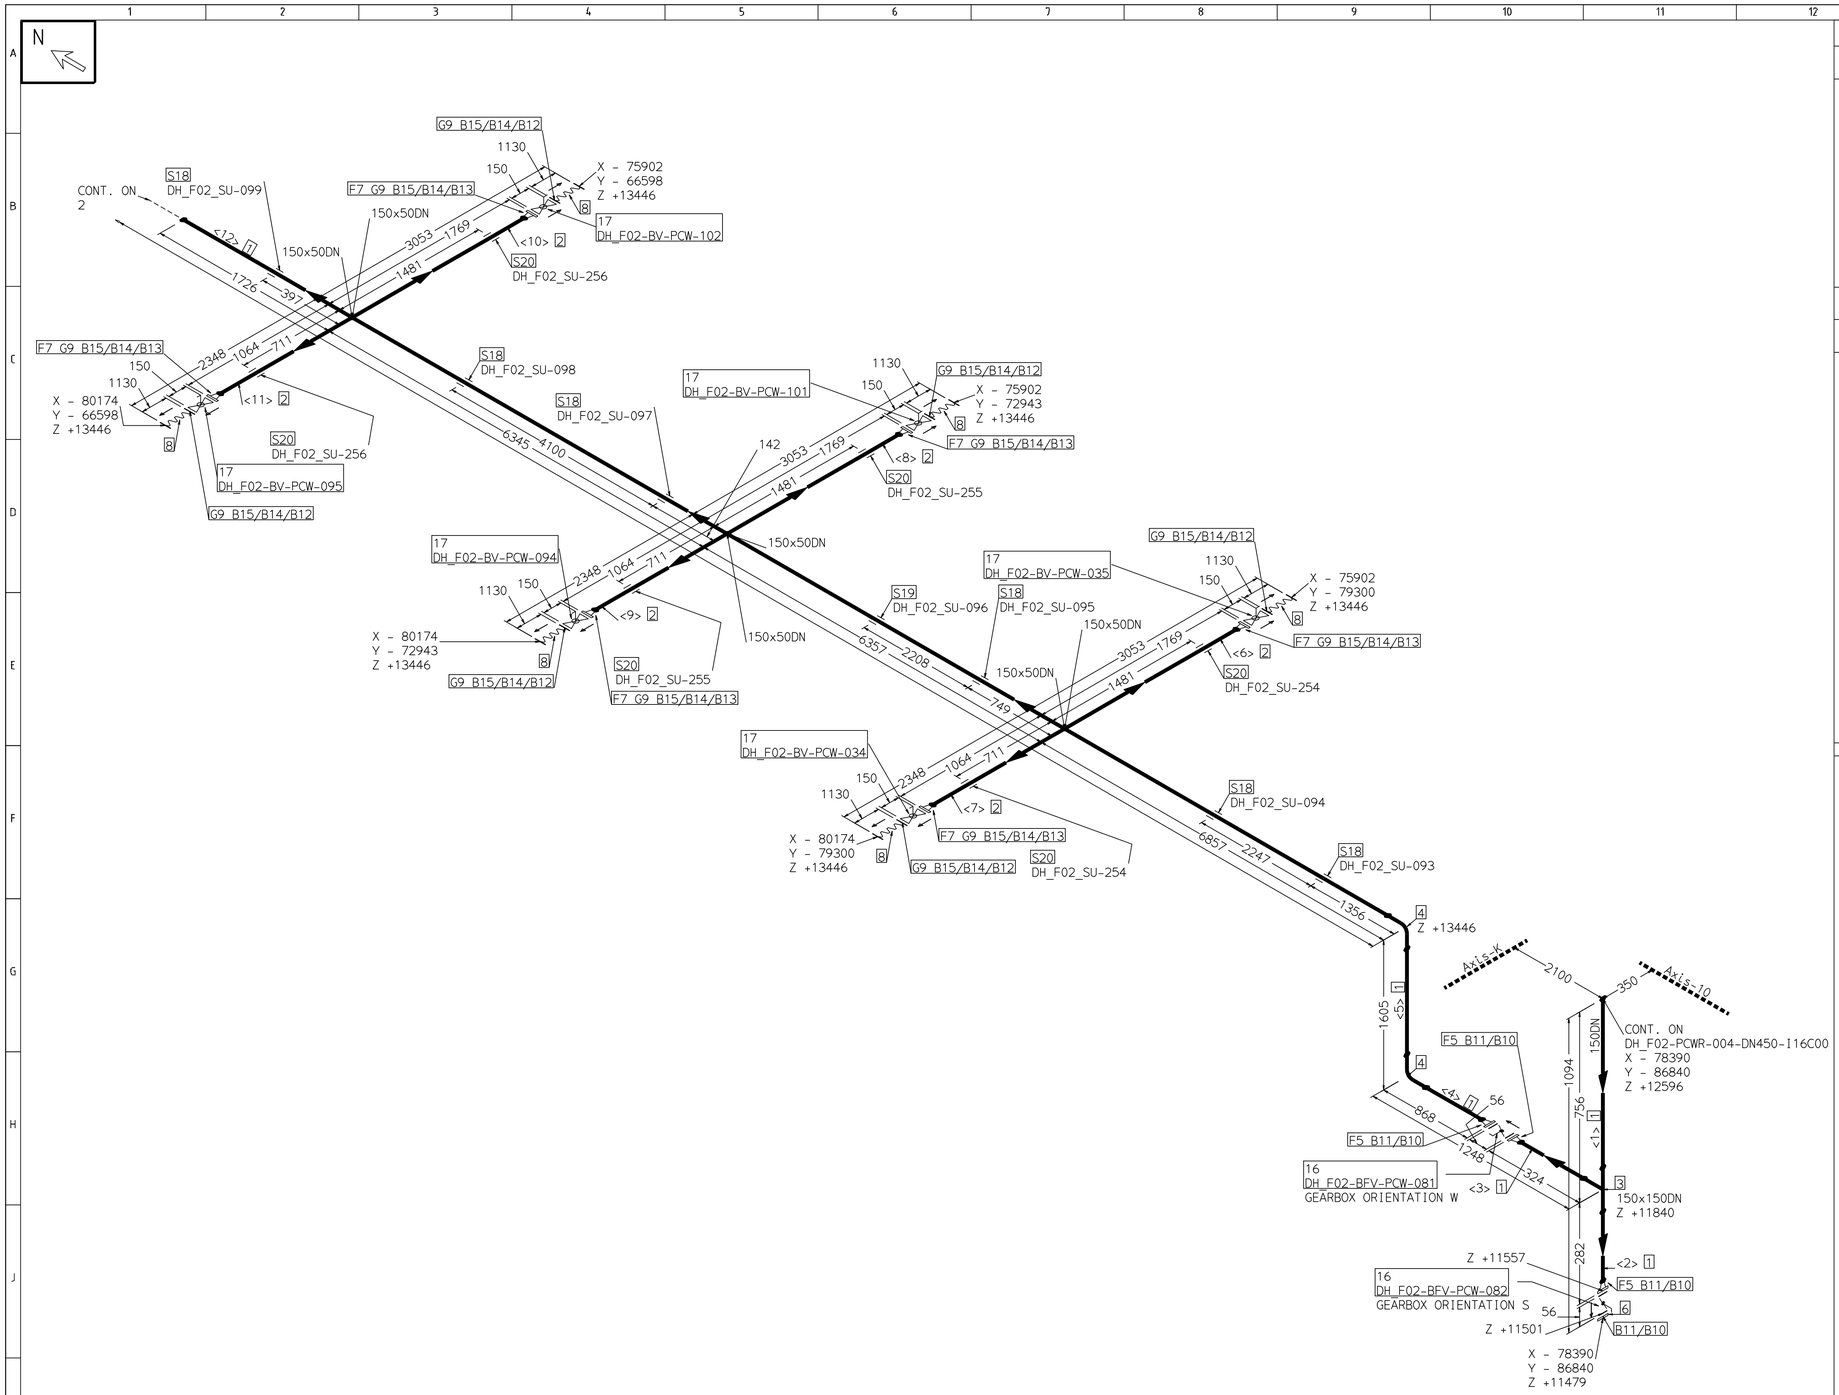

MATERIAL

Pos No.	Description	Material	DN (MM)	Qty.
	PIPE			
1	Carbon steel pipe - EN10217-2 - 168.3x4.5 P235GH	P235GH	150	23610MM
2	Carbon steel pipe - EN10217-2 - 60.3x2.9 P235GH	P235GH	50	7755MM
	FITTINGS			
3	Tee - EN10253-1 - Type A - 168.3x4.5/168.3x4.5 P235GH	P235GH	150 x 150	1
4	Elbow - EN10253-2 - Typ A - Model 3D - 90deg - 168.3x4.5 P235GH	P235GH	150	2
	FLANGES			
5	Welding Neck Flange, EN1092-1/11/B1, PN16, DN150 P250GH	P250GH	150	3
6	Blindflange, EN1092-1/05/A, PN16, DN150 P265GH	P265GH	150	1
7	Welding Neck Flange, EN1092-1/11/B1, PN16, DN50 P250GH	P250GH	50	6

MATERIAL

Pos No.	Description	Material	DN (MM)	Qty.
	FITTINGS			
8	Stainless steel hose - Mason Industries Typ FFL2B-SP L=950mm - PN16 - DN50		50	6
	GASKETS			
9	Flat sealing EN1514-1, Form IBC, PN16, 2mm - DN50 Klingersil C-4400	Klingersil C-4400	50	12
	BOLTS			
10	Hexagon Screw BS4190 - M20 x 45 - 5.6		20	32
11	Washer BS4190 - M20 - Steel zinced		20	32
12	Hexagon Screw BS4190 - M16 x 75 - 5.6		16	24
13	Hexagon Screw BS4190 - M16 x 65 - 5.6		16	24
14	Hexagon Nut BS4190 - M16 - 5		16	48
15	Washer BS4190 - M16 - Steel zinced		16	96
	VALVES / IN-LINE ITEMS			
16	Butterfly valve - AICHHORN - fully lugged - handlever - PN16 - DN150		150	2
17	Ball Valve - Flanged - for Hyena - hand lever - DN50		50	6
	SUPPORTS			
18	ASSEMBLY GROUP BG51-F80; ARTICLE NO. 112742		150	6
19	ASSEMBLY GROUP BG52-DN150; ARTICLE NO. 114666		150	1
20	ASSEMBLY GROUP BG92-MS41-M10-50-0, DN50+0mm Insul.		50	6

CUT PIPE LENGTH

PIECE NO	CUT LENGTH	DN (MM)	REMARKS	PIECE NO	CUT LENGTH	DN (MM)	REMARKS
<1>	613	150		<2>	84	150	
<3>	126	150		<4>	584	150	
<5>	1147	150		<6>	1645	50	
<7>	940	50		<8>	1645	50	
<9>	940	50		<10>	1645	50	
<11>	940	50		<12>	21056	150	SETON TEE

Insulation Specification:

Pipe Number: DH_F02-PCWR-033-DN150-I16C00

Specification: I16C00

Medium:

Pipe data, Inspection Instruction

see Pipelist:

X ... Part-No. | X ... Support No.

SPLx ... Spool-No. | ... Field weld (FW)

X ... Joint No. | ... Shop weld (SW)

Fabricationtolerances acc. EN-ISO-13920

Limits for

Longitudinal dimensions	Angular dimensions	Straightness-, Flatness- and Parallelismtolerances
Toleranceclass A	Toleranceclass A	Toleranceclass E

+Z Up, +Y North, +X East, -X West, -Y South, -Z Down

DC building

Zero Point for calculation and Isometric

North Y, X East

PROTECTION MARK DIN ISO 16016

Rev.	date	drawn	checked	approved	description
0	2024-10-18	TBH-H	TBH-A		first issue

ZAUNER ANLAGENTECHNIK

Zauner Anlagentechnik GmbH
A-4702 Wallern
Mauer 20 / Gewerbepark

exyte

Fluor Consultants B.V,
sivuliike Suomessa
FI-00181 Helsinki
Porkkalankatu 24

project : LPP 6A - K007 - Mechanical & Piping

drawing title : Piping Isometric

DH_F02-PCWR-033-DN150-I16C00

Sheet no. 1/3

Revision 0

CAD-NR.: (ERS.F.:) (ERS.D.:)

A1

cad system PDMS/ E3D

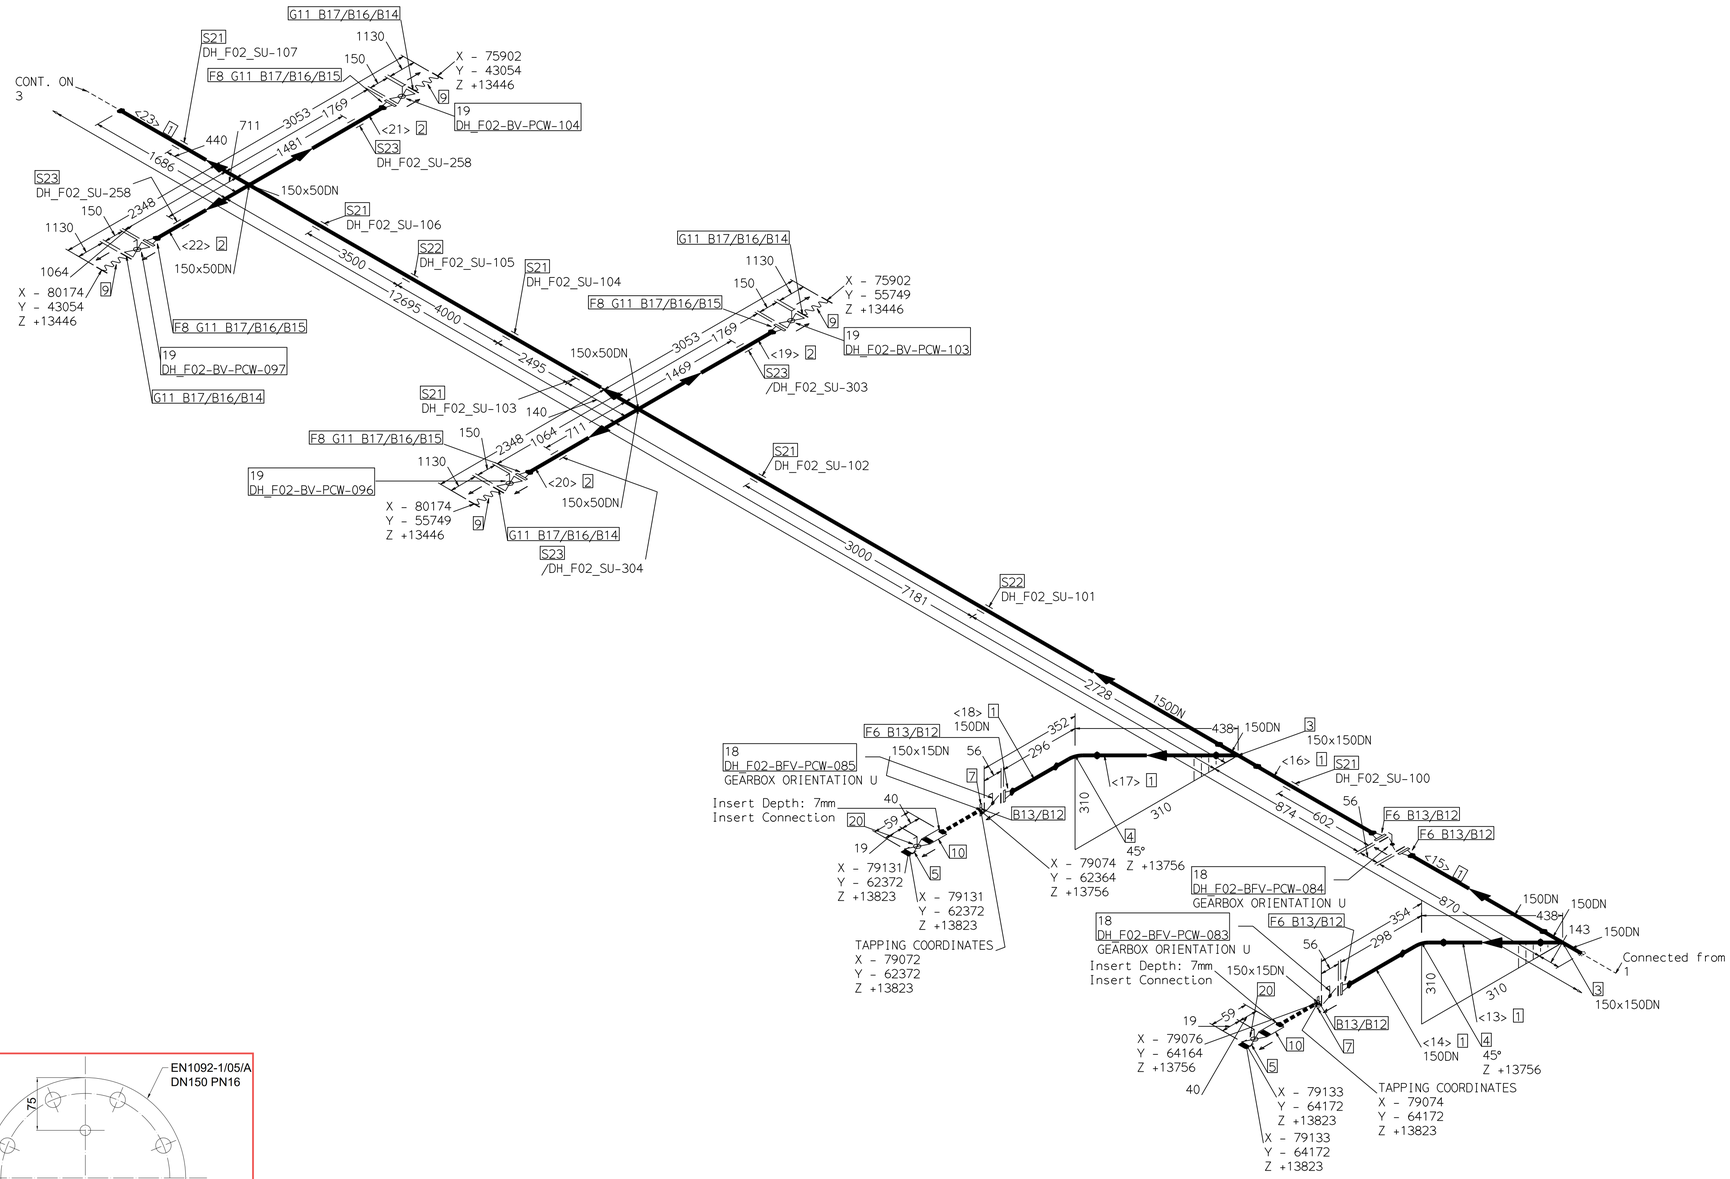

MATERIAL

Pos No.	Description	Material	DN (MM)	Qty.
	PIPE			
1	Carbon steel pipe - EN10217-2 - 168.3x4.5 P235GH	P235GH	150	23461MM
2	Carbon steel pipe - EN10217-2 - 60.3x2.9 P235GH	P235GH	50	5170MM
	FITTINGS			
3	Tee - EN10253-1 - Type A - 168.3x4.5/168.3x4.5 P235GH	P235GH	150 x 150	2
4	Elbow - EN10253-2 - Typ A - Model 3D - 45deg - 168.3x4.5 P235GH	P235GH	150	2
5	PLUG - EN10241 - T9 - Fig.290 - DN15 P235GH	P235GH	15	2
	FLANGES			
6	Welding Neck Flange, EN1092-1/11/B1, PN16, DN150 P250GH	P250GH	150	4
7	Blindflange, EN1092-1/05/A, PN16, DN150 P265GH	P265GH	150	2
8	Welding Neck Flange, EN1092-1/11/B1, PN16, DN50 P250GH	P250GH	50	4

MATERIAL

Pos No.	Description	Material	DN (MM)	Qty.
	FITTINGS			
9	Stainless steel hose - Mason Industries Typ FFL2B-SP L=950mm - PN16 - DN50		50	4
10	Welding nipple - EN10241 - DN15 - L=40mm P235GH	P235GH	15	2
	GASKETS			
11	Flat sealing EN1514-1, Form IBC, PN16, 2mm - DN50 Klingersil C-4400	Klingersil C-4400	50	8
	BOLTS			
12	Hexagon Screw BS4190 - M20 x 45 - 5.6		20	48
13	Washer BS4190 - M20 - Steel zinced		20	48
14	Hexagon Screw BS4190 - M16 x 75 - 5.6		16	16
15	Hexagon Screw BS4190 - M16 x 65 - 5.6		16	16
16	Hexagon Nut BS4190 - M16 - 5		16	32
17	Washer BS4190 - M16 - Steel zinced		16	64
	VALVES / IN-LINE ITEMS			
18	Butterfly valve - AICHHORN - fully Lugged - handlever - PN16 - DN150		150	3
19	Ball Valve - Flanged - for Hyena - hand Lever - DN50		50	4
20	Ball valve - ISIS art. 2411 - screwed - hand lever - DN15		15	2
	SUPPORTS			
21	ASSEMBLY GROUP BG51-F80; ARTICLE NO. 112742		150	6
22	ASSEMBLY GROUP BG52-DN150; ARTICLE NO. 114666		150	2
23	ASSEMBLY GROUP BG92-MS41-M10-50-0, DN50+0mm Insul.		50	4

CUT PIPE LENGTH

PIECE NO	CUT LENGTH	DN (MM)	REMARKS	PIECE NO	CUT LENGTH	DN (MM)	REMARKS
<13>	200	150		<14>	148	150	
<15>	672	150		<16>	676	150	
<17>	200	150		<18>	146	150	
<19>	1645	50		<20>	940	50	
<21>	1645	50		<22>	940	50	
<23>	21419	150	SETON TEE				



Insulation Specification:

Pipe Number: DH_F02-PCWR-033-DN150-I16C00

Specification: I16C00

Medium:

Pipe data, Inspection Instruction

see Pipelist:

X ... Part-No.	X ... Support No.
SPLx ... Spool-No.	... Field weld (FW)
X ... Joint No.	... Shop weld (SW)

Fabricationtolerances acc. EN-ISO-13920

Limits for		
Longitudinal dimensions	Angular dimensions	Straightness-, Flatness- and Parallelismtolerances
Toleranceclass A	Toleranceclass A	Toleranceclass E

+Z Up, +Y North, +X East, -X West, -Y South, -Z Down

DC building

Zero Point for calculation and Isometric

North Y, X East

PROTECTION MARK DIN ISO 16016

Rev.	date	drawn	checked	approved	description
0	2024-10-18	TBH-H	TBH-A		first issue

ZAUNER ANLAGENTECHNIK

Zauner Anlagentechnik GmbH
A-4702 Wallern
Mauer 20 / Gewerbepark

exyte

Fluor Consultants B.V,
sivuliike Suomessa
FI-00181 Helsinki
Porkkalankatu 24

project : LPP 6A - K007 - Mechanical & Piping

drawing title : Piping Isometric

DH_F02-PCWR-033-DN150-I16C00

Sheet no. 2/3

Revision 0

CAD-NR.: (ERS.F.:) (ERS.D.:)

A1

cad system PDMS/ E3D

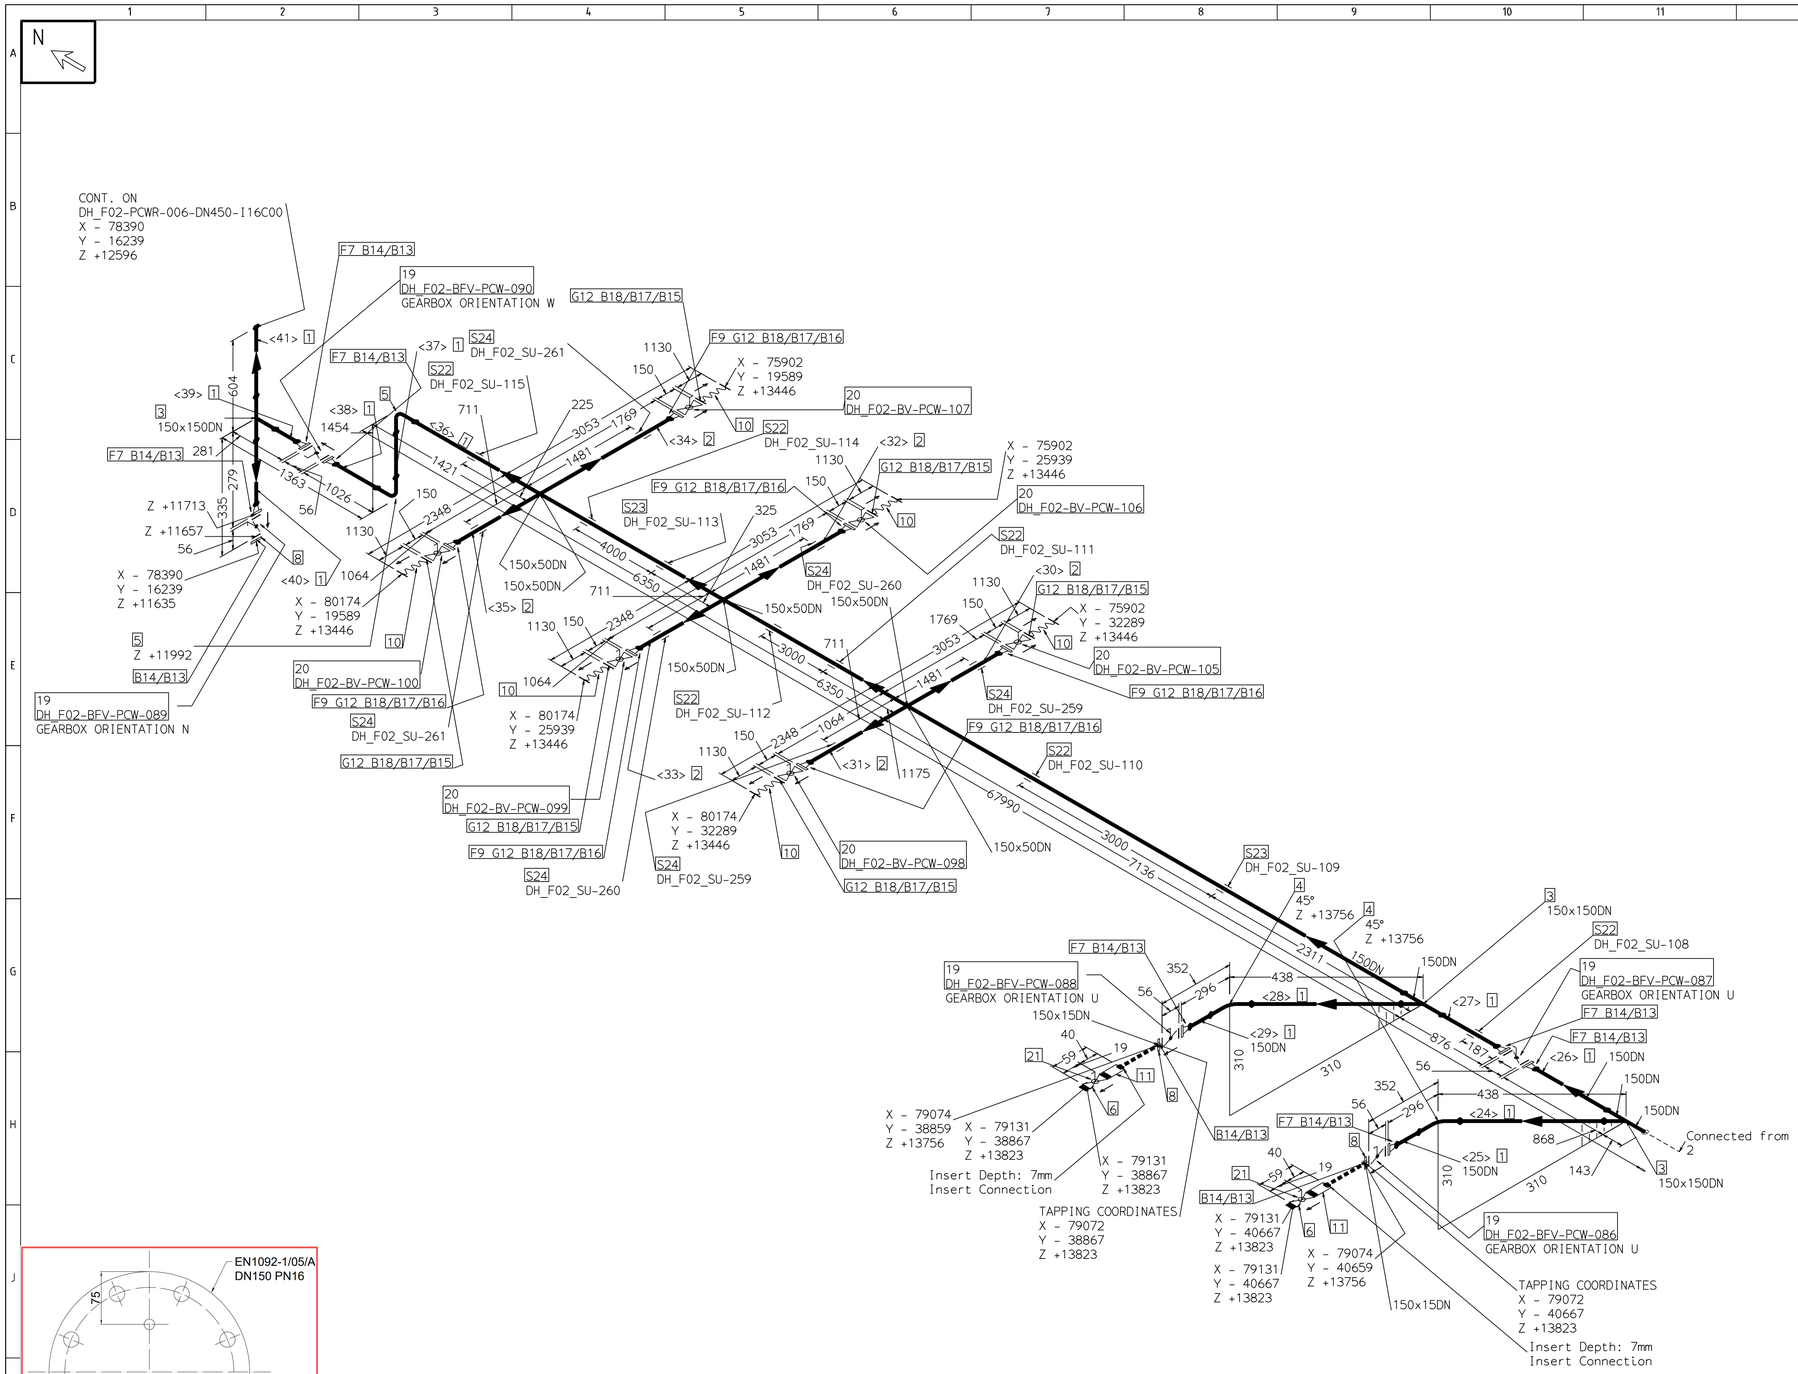



MATERIAL

Pos No.	Description	Material	DN (MM)	Qty.
	PIPE			
1	Carbon steel pipe - EN10217-2 - 168.3x4.5 P235GH	P235GH	150	25288MM
2	Carbon steel pipe - EN10217-2 - 60.3x2.9 P235GH	P235GH	50	7755MM
	FITTINGS			
3	Tee - EN10253-1 - Type A - 168.3x4.5/168.3x4.5 P235GH	P235GH	150 x 150	3
4	Elbow - EN10253-2 - Typ A - Model 3D - 45deg - 168.3x4.5 P235GH	P235GH	150	2
5	Elbow - EN10253-2 - Typ A - Model 3D - 90deg - 168.3x4.5 P235GH	P235GH	150	2
6	PLUG - EN10241 - T9 - Flg.290 - DN15 P235GH	P235GH	15	2
	FLANGES			
7	Welding Neck Flange, EN1092-1/11/B1, PN16, DN150 P250GH	P250GH	150	7
8	Blindflange, EN1092-1/05/A, PN16, DN150 P265GH	P265GH	150	3
9	Welding Neck Flange, EN1092-1/11/B1, PN16, DN50 P250GH	P250GH	50	6

MATERIAL

Pos No.	Description	Material	DN (MM)	Qty.
	FITTINGS			
10	Stainless steel hose - Mason Industries Typ FFL2B-SP L=950mm - PN16 - DN50		50	6
11	Welding nipple - EN10241 - DN15 - L=40mm P235GH	P235GH	15	2
	GASKETS			
12	FLat sealing EN1514-1, Form IBC, PN16, 2mm - DN50 Klingersil C-4400	Klingersil C-4400	50	12
	BOLTS			
13	Hexagon Screw BS4190 - M20 x 45 - 5.6		20	80
14	Washer BS4190 - M20 - Steel zinced		20	80
15	Hexagon Screw BS4190 - M16 x 75 - 5.6		16	24
16	Hexagon Screw BS4190 - M16 x 65 - 5.6		16	24
17	Hexagon Nut BS4190 - M16 - 5		16	48
18	Washer BS4190 - M16 - Steel zinced		16	96
	VALVES / IN-LINE ITEMS			
19	Butterfly valve - AICHHORN - fully lugged - handlever - PN16 - DN150		150	5
20	Ball Valve - Flanged - for Hyena - hand lever - DN50		50	6
21	Ball valve - ISIS art. 2411 - screwed - hand lever - DN15		15	2
	SUPPORTS			
22	ASSEMBLY GROUP BG51-F80; ARTICLE NO. 112742		150	6
23	ASSEMBLY GROUP BG52-DN150; ARTICLE NO. 114666		150	2
24	ASSEMBLY GROUP BG92-MS41-M10-50-0, DN50+0mm Insul.		50	6

CUT PIPE LENGTH

PIECE NO	CUT LENGTH	DN (MM)	REMARKS	PIECE NO	CUT LENGTH	DN (MM)	REMARKS
<24>	200	150		<25>	146	150	
<26>	670	150		<27>	678	150	
<28>	200	150		<29>	146	150	
<30>	1645	50		<31>	940	50	
<32>	1645	50		<33>	940	50	
<34>	1645	50		<35>	940	50	
<36>	20885	150	SETON TEE	<37>	996	150	
<38>	742	150		<39>	83	150	
<40>	81	150		<41>	461	150	

Insulation Specification:

Pipe Number:	DH_F02-PCWR-033-DN150-I16C00
Specification:	I16C00
Medium:	

Pipe data, Inspection Instruction
see Pipelist:

X ... Part-No.	X ... Support No.
SPLx ... Spool-No.	... Field weld (FW)
X ... Joint No.	... Shop weld (SW)

Fabricationtolerances acc. EN-ISO-13920

Limits for		
Longitudinal dimensions	Angular dimensions	Straightness-, Flatness- and Parallelismtolerances
Toleranceclass A	Toleranceclass A	Toleranceclass E

+Z Up, +Y North, +X East, -X West, -Y South, -Z Down

DC building

Zero Point for calculation and Isometric

North Y, X East

PROTECTION MARK DIN ISO 16016

Rev.	date	drawn	checked	approved	description
0	2024-10-18	TBH-H	TBH-A		first issue

ZAUNER ANLAGENTECHNIK
Zauner Anlagentechnik GmbH
A-4702 Wallern
Mauer 20 / Gewerbepark

exyte
Fluor Consultants B.V,
sivuliike Suomessa
FI-00181 Helsinki
Porkkalankatu 24

project : LPP 6A - K007 - Mechanical & Piping

drawing title : Piping Isometric

DH_F02-PCWR-033-DN150-I16C00

Sheet no. 3/3 | Revision 0

CAD-NR.: | (ERS.F.:) | (ERS.D.:)

A1

cad system PDMS/ E3D