

Search

Kind (primary)

osdu:wks:master-data--Busine

osdu:wks:master-data--BusinessDecision:1.0.0

Use

More kinds (optional)

Add more kinds (comma or newline separated)

query

*

limit

10

returnedFields (comma separated)

id,kind,version

Search

Results (5)

Name	Description
GRAND — Decision Gate 2 (DG2) Concept Select	—
GRAND — Decision Gate 2 (DG2) Concept Select	—
GRAND — Decision Gate 2 (DG2) Concept Select	—
Drogon — Decision Gate 1 DG1 Identify & Assess	DG1 evaluation of the Valysar fluvial formation in the Drogon field, covering static in-place volume estimation across 7 reserv
Drogon — Decision Gate 2 DG2 Concept Select	DG2 Concept Select for the Drogon field development. Valysar fluvial formation across 7 reservoir segments (NorthSea, Nort

Select a result

Record:

Drogon — Decision Gate 2 DG2 Concept Select — dev:master-data--BusinessDecision:Drogon-DG2-ConceptSelect:1

Drogon — Decision Gate 2 DG2 Concept Select

Overview

Name

Description

Kind

ID

Version

ParentObjectID

Drogon — Decision Gate 2 DG2 Concept Select

DG2 Concept Select for the Drogon field development. Valysar fluvial formation across 7 reservoir segments (NorthSea, NorthHorst, CentralHc CentralFlanks, CentralSouth, SouthWing, EastLobe) with three facies types (Channel, Crevasse, Floodplain). Revised petrophysical interpretation porosity reduced by factor 0.8 based on core analysis and thin sections. 50 FMU realisations quantify STOIIIP uncertainty: P90 33.8 / P50 45.4 / 59.4 MSm³ oil in-place. Recoverable oil (P50) 14.8 MSm³ at 32.5% recovery factor. Recommended concept: subsea tie-back to FPSO with 2×4-templates, 12 production wells. NPV@10% 520 MUSD, CAPEX 8,500 MNOK, first oil 2028-H1.

osdu:wks:master-data--BusinessDecision:1.0.0

dev:master-data--BusinessDecision:Drogon-DG2-ConceptSelect:1

1772294950515790

—

Drogon — Decision Gate 2 DG2 Concept Select

Approve subsea tie-back development concept. Two 4-slot templates (8 slots), 12 wells targeting full 7-segment Valysar scope. Reference case STOIIIP 45.4 MSm³ (P90 33 59.4) — revised porosity interpretation ×0.8. Recoverable oil P50 14.8 MSm³ (RF 32.5%). First oil target 2028-H1. Proceed to DG3 FEED.

PROJECT	DECISION GATE	STATUS	DECISION DATE	DUE DATE
Drogon Field Development	DG2	Pending	—	2026-06-30
FORMATION	WELLS	TARGET START-UP		
Valysar	12	2028-H1		

HEADLINE VOLUMES (STOIIP)

STOIIP TOTAL P90P50P10 11.5510.939.85 MSm³	RECOVERABLE OIL P90P50P10 3.473.773.84 MSm³	RECOVERY FACTOR P90P50P10 30.0%34.5%39.0%	CENTRAL HORST P90P50P10 5.934.914.52 MSm³	CENTRAL NORTH P90P50P10 1.771.321.22 MSm³
CENTRAL RAMP P90P50P10 0.680.530.51 MSm³	CENTRAL SOUTH P90P50P10 3.693.072.77 MSm³	EAST LOWLAND P90P50P10 0.030.030.02 MSm³	NORTH HORST P90P50P10 0.100.090.08 MSm³	WEST LOWLAND P90P50P10 0.480.370.31 MSm³

DEVELOPMENT CONCEPT

Subsea development with 2×4-slot templates (8 slots + 2 contingent), tie-back to converted FPSO via dual 10" production flowlines and 6" gas-lift line. Distance to FPSO ~8 km. Water depth 108 m. Valysar formation at ~1700 m TVD MSL.

WELLS 12	TEMPLATE SLOTS 10 (2 centres)	HOST FACILITY Drogon FPSO (converted)	DISTANCE TO HOST 8 km
WATER DEPTH 108 m	FORMATION Valysar	FIELD AREA Drogon	TARGET START-UP 2028-H1
CONTINGENT WELLS 2	FLOWLINE 2×10" production + 6" gas lift	SUBSEA BOOST Yes	WATER TREATMENT 5000 m³/d
INJECTION STRATEGY Water injection for pressure support (4 injectors planned Phase 2)			
WELL PLAN 12 prod. 4 inj. (Ph2) ~3200 m MD 45 d/well Frac-pack + ICD lower completion			

RESERVOIR PROPERTIES ▶

KEY ECONOMICS

Reference case economics from CRA, updated for DG2 revised volumes (porosity ×0.8 → ~20% less STOIIP and recoverable). NPV reduced from DG1's 650 MUSD to 520 MUSD. Breakeven from \$38 to \$42/bbl. CAPEX unchanged. Payback extended by 1 year due to lower production rates.

NPV (10%) \$520M	IRR 17%	CAPEX 8500 MNOK	OPEX / YR 420 MNOK	BREAKEVEN \$42/bbl	PAYBACK 7.0 yr
OIL PRICE \$75/bbl					

2026 real terms

SCHEDULE

DG2 Concept Select	2026-02-28	Completed
DG3 FEED	2027-Q1	Planned
FID / DG4	2027-Q3	Planned
FPSO Drydock Start	2027-Q4	Planned
Subsea Installation	2028-Q1	Planned
First Oil	2028-H1	Planned
Plateau Production	2029	Planned

ALTERNATIVES

Alt-A: Subsea tie-back to FPSO (2×4-slot templates) Rank 1 Approve

Highest NPV; leverages planned FPSO conversion for Drogon area. 12 wells across 7 segments, 2×4-slot templates with 2 contingent slots for infill. Subsea boosting pump included for low-pressure phase. Modular water treatment allows staged capacity expansion.

NPV \$520M CAPEX 8500 MNOK IRR 17%

Alt-B: Reduced scope — CentralHorst + CentralSouth only Rank 2 Consider

Focus on the two highest-confidence segments (Channel facies dominant, lowest porosity uncertainty). 6 wells, single 4-slot template + 2 satellite wells. Lower investment captures only ~55% of recoverable resource. Provides first-oil option if FPSO schedule slips.

NPV \$300M CAPEX 4800 MNOK IRR 20%

Alt-C: Defer — acquire DG3-quality appraisal data Rank 3 Fallback

NorthHorst and EastLobe fault compartmentalisation remains poorly constrained. Additional well test data (est. 12 months, 200 MNOK) would reduce dynamic uncertainty range by ~40%. Risk of losing FPSO drydock window if deferred beyond 2026-Q3.

RISKS

Drogon DG2 — Porosity and cementation uncertainty

Drogon DG2 — Fault transmissibility and reservoir compartmentalization

Drogon DG2 — HSE and environmental impact

Drogon DG2 — Schedule risk (FPSO and long-lead equipment)

KEY UNCERTAINTIES

Facies-dependent porosity Medium

DG2 appraisal core data have narrowed porosity ranges (revised $\times 0.8$ from DG1): Channel 0.21–0.24, Crevasse 0.15–0.18, Floodplain 0.06–0.10. Impact downgraded from High (DG1) to Medium based on 50-realisation FMU results. STOIIP reduced by ~20% vs DG1.

Fault transmissibility High

Production testing confirmed partial communication across CentralHorst–CentralSouth fault. NorthHorst and EastLobe remain untested. 30% probability of needing 2–4 infill wells (80–120 MUSD incremental CAPEX).

OWC depth and aquifer support Medium

OWC refined to 1710 ± 10 m TVDSS (from ± 15 m at DG1). Aquifer modelling suggests moderate pressure support, sufficient for primary depletion; water injection reserve Phase 2.

Recovery factor uncertainty High

Dynamic simulation (50 realisations, revised porosity) gives RF range 28–37%. P50 = 32.5%. Absolute recoverable reduced by ~20% vs DG1 (14.8 vs 18.5 MSm³). Main driver is sweep efficiency in NorthHorst and EastLobe where fault baffles may create unswept compartments. ICD completions and Phase 2 water injection are key mitigations.

FPSO water treatment capacity Medium

Water cut expected to reach 50% by Year 5 and 70% by Year 10. FPSO design includes 5,000 m³/d treatment; expansion module to 8,000 m³/d available for Year 7+. Uncertainty in early water breakthrough timing from EastLobe aquifer.

INPUT PARAMETERS ▸

DATA SOURCES

GeoModelDataspace Reservoir DDMS


RDDMS ETP dataspace with the Drogon DG2 geomodel EPC files
OSDU: dev:dataset--ETPDataspace:maap-drogon_dg:1

AUTHORS & GOVERNANCE ▸

RECOMMENDATIONS FOR NEXT GATE

1. Execute FEED for FPSO conversion and subsea installation scope
2. Secure FPSO drydock slot (2027-Q4 target) with dual-yard tendering strategy
3. Drill NorthHorst appraisal sidetrack to constrain fault compartmentalisation model
4. Finalise Phase 2 water injection well locations based on DG3 dynamic simulation
5. Complete EIA with cold-water coral avoidance routing for flowline corridor
6. Run Level 3+ FMU workflow with 100+ realisations for DG3 volumetric basis
7. Prepare PDO final draft for MPE submission post-FID

Relationships

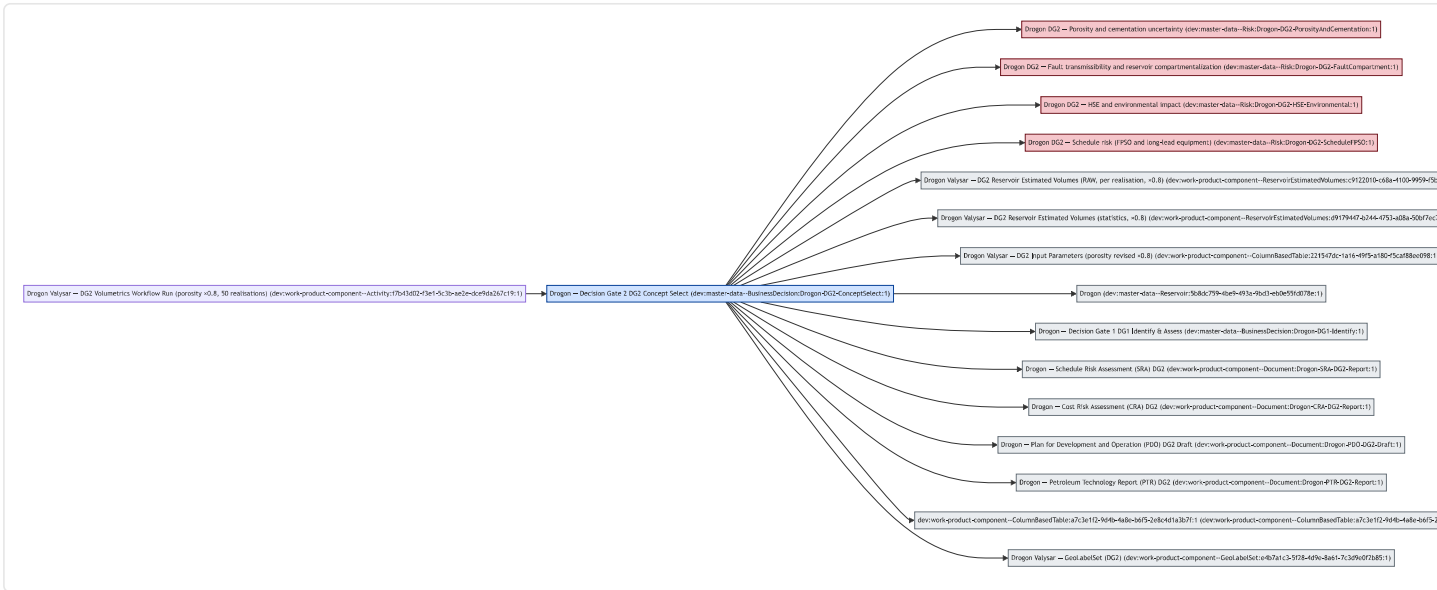

Linked objects

- Drogon DG2 — Porosity and cementation uncertainty (risk)
- Drogon DG2 — Fault transmissibility and reservoir compartmentalization (risk)
- Drogon DG2 — HSE and environmental impact (risk)
- Drogon DG2 — Schedule risk (FPSO and long-lead equipment) (risk)
- Drogon Valysar — DG2 Reservoir Estimated Volumes (RAW, per realisation, ×0.8) (ref)
- Drogon Valysar — DG2 Reservoir Estimated Volumes (statistics, ×0.8) (ref)
- Drogon Valysar — DG2 Input Parameters (porosity revised ×0.8) (ref)
- Drogon (ref)
- Drogon — Decision Gate 1 DG1 Identify & Assess (ref)
- Drogon — Schedule Risk Assessment (SRA) DG2 (ref)
- Drogon — Cost Risk Assessment (CRA) DG2 (ref)
- Drogon — Plan for Development and Operation (PDO) DG2 Draft (ref)
- Drogon — Petroleum Technology Report (PTR) DG2 (ref)
- dev.work-product-component--ColumnBasedTable:a7c3e1f2-9d4b-4a8e-b6f5-2e8c4d1a3b7f:1 (ref)
- Drogon Valysar — GeoLabelSet (DG2) (ref)

Metadata

Copy (CSV)

Name	Value
No non-tabular metadata to display.	

Tabular volume arrays are intentionally hidden here and shown only in the reconstructed table below.

Volume Breakdown (Statistical REV)

Histogram

Expand Table (40 rows)

Zone	SegmentID	Facies	BulkOil.P10	PoreOil.P10	HydrocarbonPoreOil.P10	Oil.P10	AssociatedGas.P10	BulkGas.P10
Valysar	Central Horst	Channel	24496296.6702	4881894.2412	4597227.4706	3303258.1546	425063794.0094	0.0
Valysar	Central Horst	Coal	10136266.6985	0.0	0.0	0.0	0.0	0.0
Valysar	Central Horst	Crevasse	7834596.3103	1140878.7826	842188.5574	614287.4895	83187681.4662	0.0
TOTAL	TOTAL	TOTAL	186997460.0491	21935009.838499997	14142406.5385	9852971.5993	1381556182.8033001	24146803.9907999


Production Forecast

STOIIP P50
45.4 MSm³

EUR
14.8 MSm³

PEAK OIL RATE
5.2 kSm³/d

DG2 reference case production forecast from dynamic simulation. 12 producers, Valysar formation, Drogon FPSO host. Revised porosity $\times 0.8$. Arps hyperbolic decline ($b=0.7$, $D_i=18\%/y$) w Buckley-Leverett water cut model. Water production capped at FPSO treatment capacity (4800 Sm³/d).

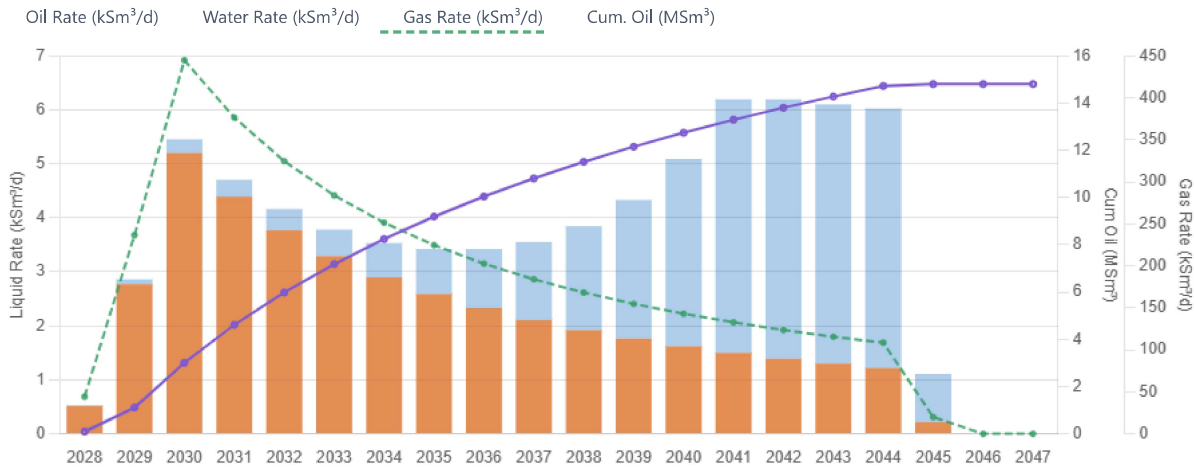

► Show production table