HALLIBURTON

ACRT - ICT - BSAT - GR COMPOSITE LOG

SCALE 1:200

COMPANY	SIRTE OIL COMPANY
WELL	C345-H6
FIELD/BLOCK	ZELTEN FIELD
COUNTRY	LIBYA
RIG	LORASCO#15

COMPANY **SIRTE OIL COMPANY**

WELL **C345-H6**

FIELD/BLOCK **ZELTEN FIELD**

COUNTRY **LIBYA**

RIG **LORASCO#15**

API No. N/A

Location Longitude: 19° 44' 48.653" E
Latitude: 28° 51' 07.869" N

Other Services:
- NONE

Permanent Datum	MSL	Elev. 0.00 ft	Elev.: K.B. 631.00 ft
Log measured from	KB	631.00 ft above perm. Datum	D.F. 631.00 ft
Drilling measured from	KB		G.L. 609.00 ft

Date	05-Dec-25		
Run No.	ONE		
Depth - Driller	3040.00 ft		
Depth - Logger	3075.00 ft		
Bottom - Logged Interval	3075.00 ft		
Top - Logged Interval	2075.00 ft		
Casing - Driller	18.625 in @ 250.00 ft	@	@
Casing - Logger	N/A		
Bit Size	8.500 in	@	@
Type Fluid in Hole	Water Based Mud		
Density / Viscosity	9.0 ppg / 55.00 s/qt		
PH / Fluid Loss	10.00 pH / 8 cptm		
Source of Sample	FLOWLINE		
Rm @ Meas. Temperature	0.150 ohmm @ 75.00 degF	@	@
Rmf @ Meas. Temperature	0.21 ohmm @ 75.00 degF	@	@
Rmc @ Meas. Temperature	0.010 ohmm @ 75.00 degF	@	@
Source Rmf / Rmc	MEASURED / MEASURED		
Rm @ BHT	0.11 ohmm @ 110.0 degF	@	@
Time Since Circulation	09:55 hr		
Time on Bottom	05-Dec-25 04:24		
Max. Rec. Temperature	110.0 degF @ 3075.0 ft	@	@
Equipment / Location	TR-1197 / FOX-9		
Recorded By	ALY ALAA		
Witnessed By	A.ELSWENI		

Fold here

Sales Order Number: 910405546 API No.: N/A PGM Version:

CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE					
Date	Sample No.				
Depth-Driller					
Type Fluid in Hole					
Density	Viscosity				
Ph	Fluid Loss				
Source of Sample					
Rm @ Meas. Temp		@		@	
Rmf @ Meas. Temp.		@		@	
Rmc @ Meas. Temp.		@		@	
Source Rmf	Rmc				
Rm @ BHT		@		@	
Rmf @ BHT		@		@	
Rmc @ BHT		@		@	

RESISTIVITY SCALE CHANGES			
Type Log	Depth	Scale Up Hole	Scale Down Hole

RESISTIVITY EQUIPMENT DATA				
Run No.	Tool Type & No.	Pad Type	Tool Pos.	Other
ONE	ACRt	NONE	S.O	N/A
	11445470			

EQUIPMENT DATA

GAMMA		ACOUSTIC		DENSITY		NEUTRON	
Run No.	ONE	Run No.	ONE	Run No.		Run No.	
Serial No.	11384203	Serial No.	11685389	Serial No.		Serial No.	
Model No.	GTET	Model No.	BSAT	Model No.		Model No.	
Diameter	3.625 in	No. of Cent.	2	Diameter		Diameter	
Detector Model No.	GTET	Spacing	0.5 ft	Log Type		Log Type	
Type	SCINT.			Source Type		Source Type	
Length	8 in	LSA [Y/N]	Y	Serial No.		Serial No.	
Distance to Source	N/A	FWDA [Y/N]	Y	Strength		Strength	

LOGGING DATA

GENERAL				GAMMA		ACOUSTIC			DENSITY			NEUTRON		
Run	Depth		Speed	Scale		Scale		Matrix	Scale		Matrix	Scale		Matrix
No.	From	To	ft/min	L	R	L	R		L	R		L	R	
ONE	3075	2075	REC	0	150	240	40							

DIRECTIONAL INFORMATION

Maximum Deviation	0.00 deg	@	0.00 ft	KOP	@	0.00 ft

WELL IS VERTICAL AS PER CLIENT

Remarks:

1.FIRST RUN IN WELL.

2. TOOLS: RWCH-GR-BSAT-ICT-ACRt RAN IN COMBINATION AS PER CLIENT'S REQUEST.

3. LOG SCALES, INTERVALS AND PRESENTATIONS ARE AS PER CLIENT'S REQUEST.

4. MUD DATA FURNISHED BY MUD ENGINEER ON LOCATION:

-- CHLORIDES: 24000 mg.

HALLIBURTON

WELL DIAGRAM REPORT

Customer: **SIRTE OIL COMPANY**
Well: **C345-H6**
Field: **ZELTEN FIELD**
Datum: **MSL**

Location: **Longitude: 19º 44' 48.653" E**
Latitude: 28º 51' 07.869" N

Casing Size

Bit Size

18.625 in (0-250) ft

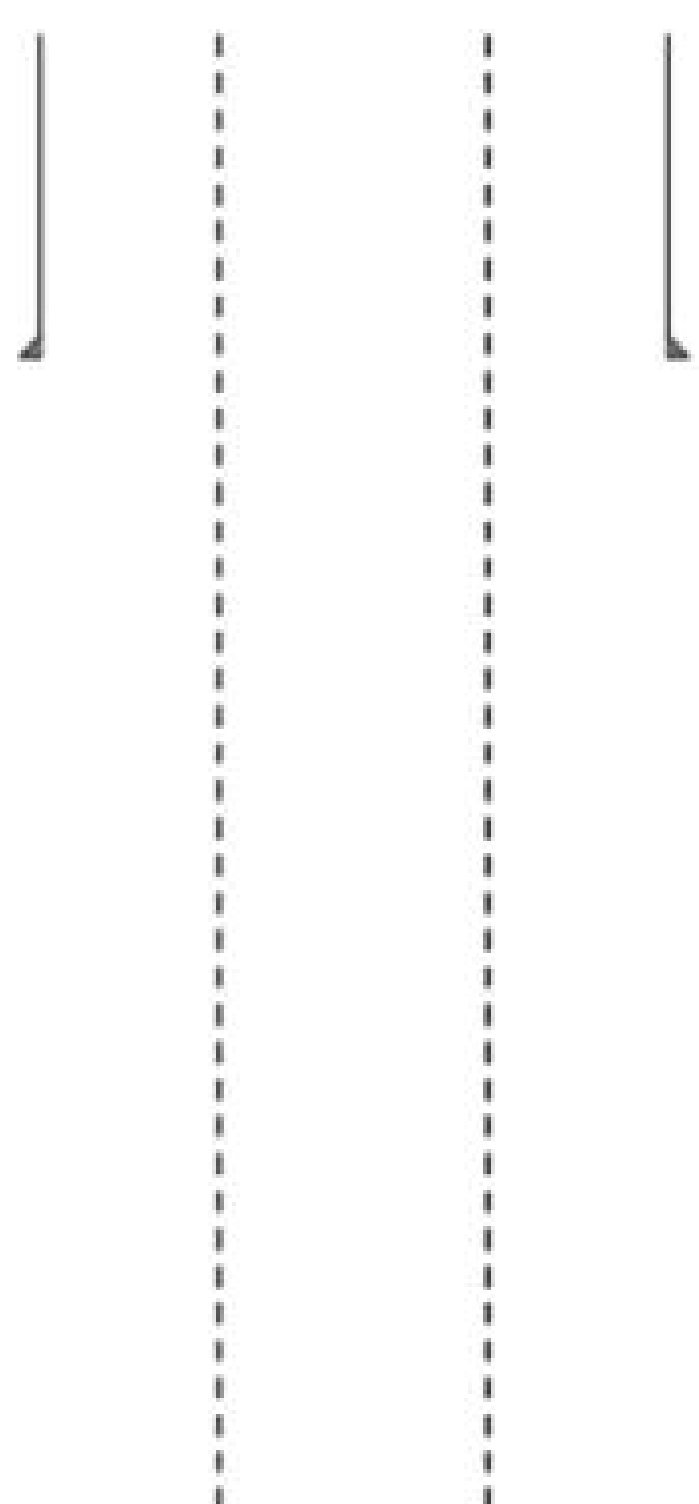

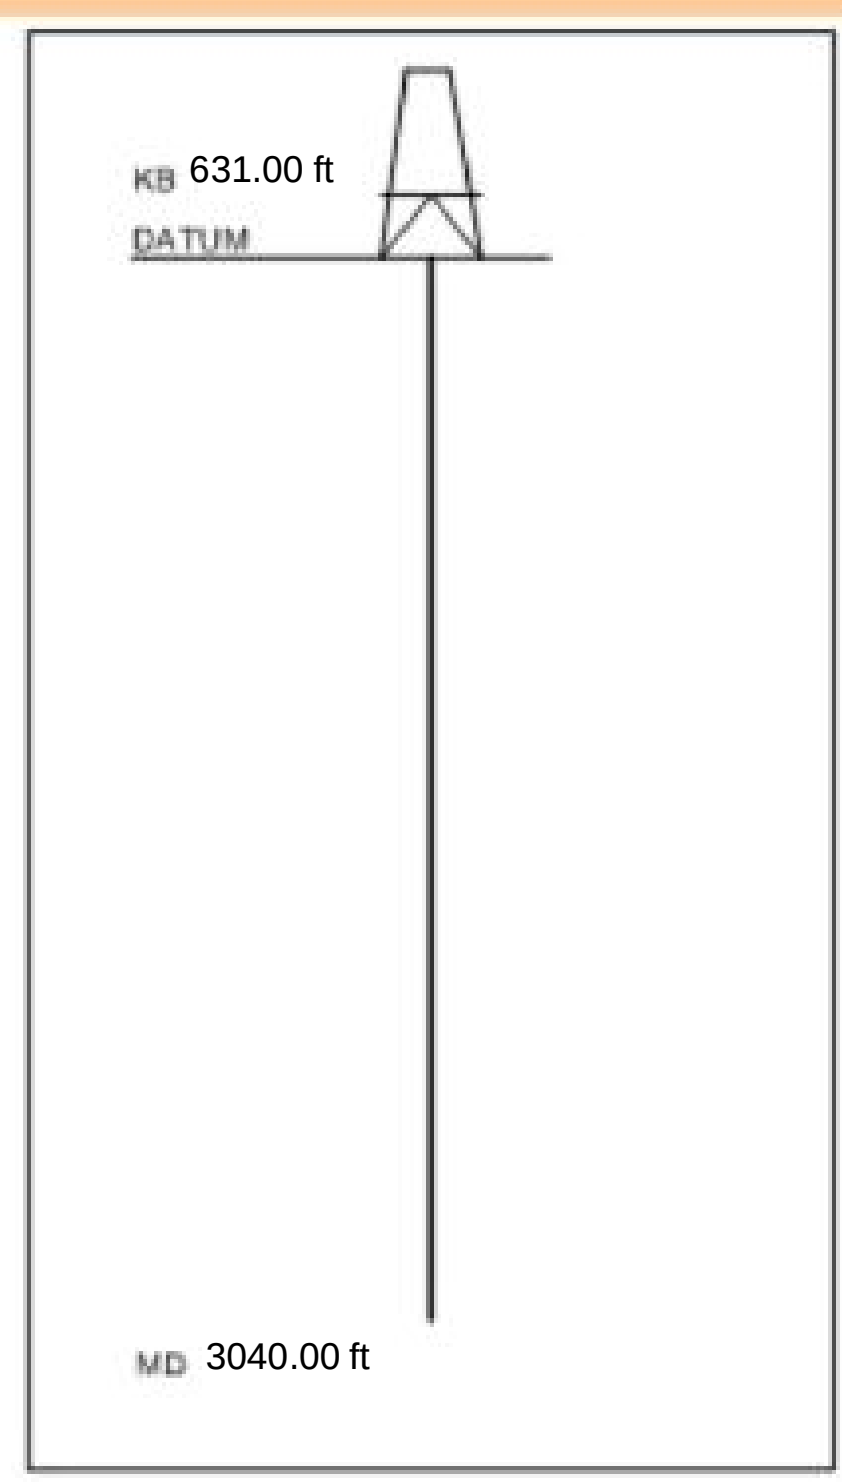

8.5 in (0-3040) ft

Data: 345-6 OH

Date: 05-Dec-25 04:33:11

HALLIBURTON

TOOL STRING DIAGRAM REPORT



Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
						72.18 ft
		Ø 2.310 in		Fishing Neck @ 71.30 ft		
RWCH-11953803 135.00 lbs		Ø 3.625 in		Load Cell @ 68.50 ft BH Temperature @ 67.93 ft	6.25 ft	
	Weak Point 12000 lbs-21212121 0.01 lbs	Ø 0.010 in*				
						65.93 ft
MCSA-11679749 70.00 lbs		Ø 3.625 in			3.02 ft	
						62.91 ft
				Z-Accelerometer @ 62.46 ft		
	ALAT Standoff OD 10-14111111 11.60 lbs	Ø 10.000 in*				
GTET-11534459 165.00 lbs		Ø 3.625 in			8.52 ft	
				GammaRay @ 56.85 ft		
						54.39 ft
	Decentralizer-13111111 6.60 lbs	Ø 3.630 in*				
BSAT-11685389 300.00 lbs		Ø 3.625 in		Receiver Array @ 45.87 ft Sonic Receivers @ 45.87 ft	15.77 ft	

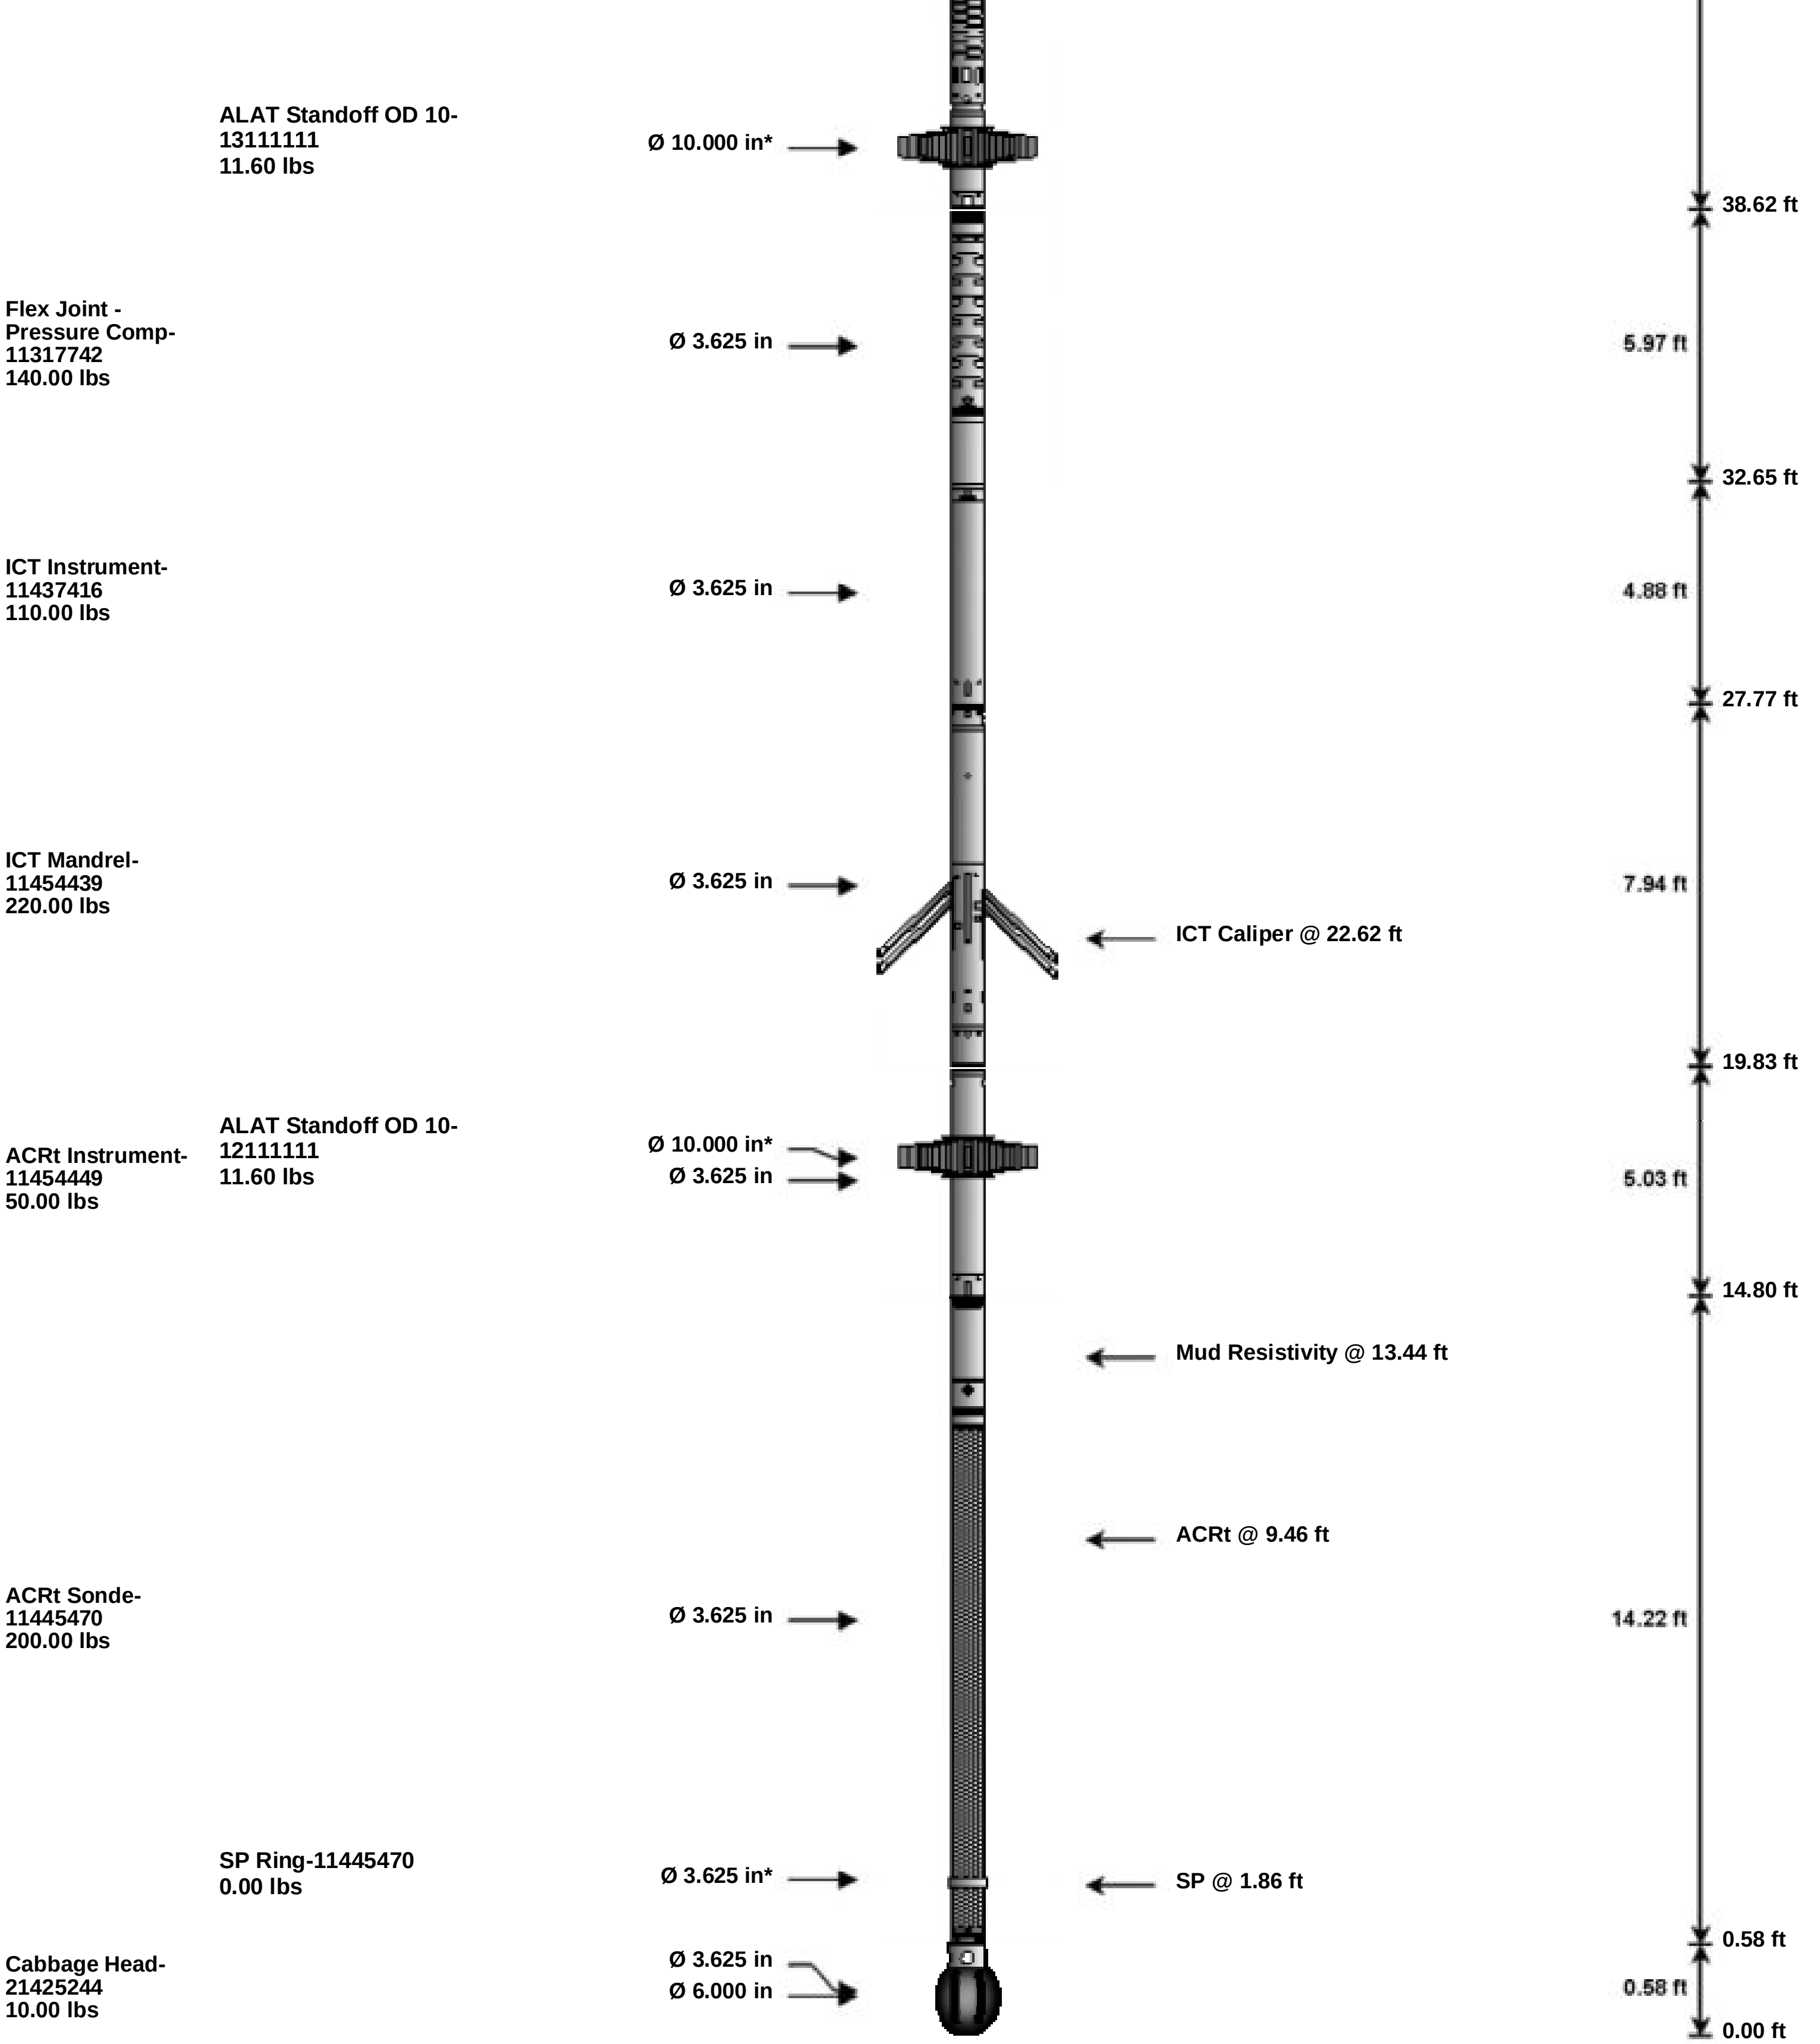

Graph is not up to scale

Mnemonic	Tool Name	Serial Number	Weight (lbs)	Length (ft)		Accumulated Length (ft)	Max.Log. Speed (fpm)
RWCH	Releasable Wireline Cable Head	11953803	135.00	6.25		65.93	300.00
WP12K	Weak Point 12000 lbs	21212121	0.01	0.01	*	66.73	300.00
MCSA-D	Multi Conductor Swivel Assembly	11679749	70.00	3.02		62.91	300.00
GTET	Gamma Telemetry Tool	11534459	165.00	8.52		54.39	60.00
ALATS	Array Laterolog Tool OD 10 Standoff	14111111	11.60	1.00	*	60.68	60.00
BSAT	Borehole Sonic Array Tool	11685389	300.00	15.77		38.62	60.00
ALATS	Array Laterolog Tool OD 10 Standoff	13111111	11.60	1.00	*	39.47	60.00
DCNT	Decentralizer	13111111	6.60	9.42	*	51.20	300.00

FLEX	Flex Joint - Pressure Compensated	11317742	140.00	5.97		32.65	300.00
ICT	Six Independent Arm Caliper Instrument	11437416	110.00	4.88		27.77	60.00
ICT	Six Independent Arm Caliper Mandrel	11454439	220.00	7.94		19.83	60.00
ACRt	Array Compensated True Resistivity Instrument Section	11454449	50.00	5.03		14.80	120.00
ALATS	Array Laterolog Tool OD 10 Standoff	12111111	11.60	1.00	*	17.34	60.00
ACRt	Array Compensated True Resistivity Sonde Section	11445470	200.00	14.22		0.58	120.00
SP	SP Ring	11445470	0.00	0.25	*	1.86	300.00
CBHD	Cabbage Head	21425244	10.00	0.58		0.00	300.00
Total			**1,441.41**	**72.18**			

* Not included in Total Length and Length Accumulation.

Data: 345-6 OH\0001 SIRT_ACRt-ICT-BSAT-GR_17-5OH\IDLE **Date: 05-Dec-25 04:33:41**

PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP					
	SHARED	BS	Bit Size	17.500	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	9.000	ppg
	SHARED	WAGT	Weighting Agent	Natural	
	SHARED	BSAL	Borehole salinity	24000.00	ppm
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
	SHARED	RMUD	Mud Resistivity	0.15	ohmm
	SHARED	TRM	Temperature of Mud	75.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	13.375	in
	SHARED	CSTR	Compressive Strength	1000.00	psia
	SHARED	ST	Surface Temperature	75.0	degF
	SHARED	TD	Total Well Depth	3040.00	ft
	SHARED	BHT	Bottom Hole Temperature	125.0	degF
	SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
	SHARED	TEMM	CBM Temperature Master Tool	GTET	
	SHARED	MSAL	Water-base mud filtrate salinity	0.00	ppm
	SHARED	SDEP	Safe Depth	200.00	ft
	GTET	ACOK	Do ACCZ Calculations?	Yes	
	GTET	GROK	Process Gamma Ray?	Yes	
	GTET	GEOK	Process Gamma Ray EVR?	No	
	GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
	GTET	BHSM	Borehole Size Source Tool	ICT Mandrel	
	BSAT	MBOK	Compute BCAS Results?	Yes	
	BSAT	FLLO	Frequency Filter Low Pass Value?	5000	Hz
	BSAT	FLHI	Frequency Filter High Pass Value?	27000	Hz
	BSAT	DTFL	Delta -T Pore Fluid	189.00	uspf
	BSAT	DTMT	Delta -T Matrix Type	Limestone 47.6	
	BSAT	DTSH	Delta -T Shale	100.00	uspf
	BSAT	SPEQ	Acoustic Porosity Equation	Wylie	
	ICT Mandrel	CLOK	Process Caliper Outputs?	Yes	
	ICT Mandrel	ECOK	Process Eccentricity Outputs?	Yes	
	ICT Mandrel	DARM	Disable Caliper Arm	No	

ICT Mandrel	ATDS	Arm To Disable	0	
ICT Mandrel	REPM	Method to replace arm?	Caliper Average	
ICT Mandrel	ARMV	Diameter to use for disabled arm	0.00	in
ICT Mandrel	DARM	Disable Second Caliper Arm	No	
ICT Mandrel	ATDS	Second Arm To Disable	0	
ICT Mandrel	REPM	Method to replace second arm?	Caliper Average	
ICT Mandrel	ARMV	Diameter to use for second disabled arm	0.00	in
ICT Mandrel	CL1O	Radius 1 Offset	0.00	in
ICT Mandrel	CL2O	Radius 2 Offset	0.00	in
ICT Mandrel	CL3O	Radius 3 Offset	0.00	in
ICT Mandrel	CL4O	Radius 4 Offset	0.00	in
ICT Mandrel	CL5O	Radius 5 Offset	0.00	in
ICT Mandrel	CL6O	Radius 6 Offset	0.00	in
ICT Mandrel	BHVC	Radius type for borehole volume calcuations	Elliptical	
ICT Mandrel	CCL	Caliper Correction Algorithm	None	
ACRt Sonde	RTOK	Process ACRt?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.50	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Upr	
ACRt Sonde	TPOS	Tool Position	Free Hanging	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMAX	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	
ACRt Sonde	MRFX	Fixed mud resistivity	2000	ohmm
ACRt Sonde	BHSM	Borehole Size Source Tool	ICT Mandrel	
ACRt Sonde	MBFL	Apply Corkscrew Effect?	No	
ACRt Sonde	UVAR	ACRT apply variation for high RT formation	Yes	

BOTTOM

Data: 345-6 OH\0001 SIRT_ACRt-ICT-BSAT-GR_17-5OH\IDLE **Date: 05-Dec-25 04:34:13**

HALLIBURTON

Plot Time: 05-Dec-25 10:44:45
Plot Range: 2069 ft to 3078 ft
Data: 345-6 OH\Well Based\MAIN PASS*
Plot File: \\COMP 200\MAIN- 200CR

MAIN PASS
(SCALE 1:200)

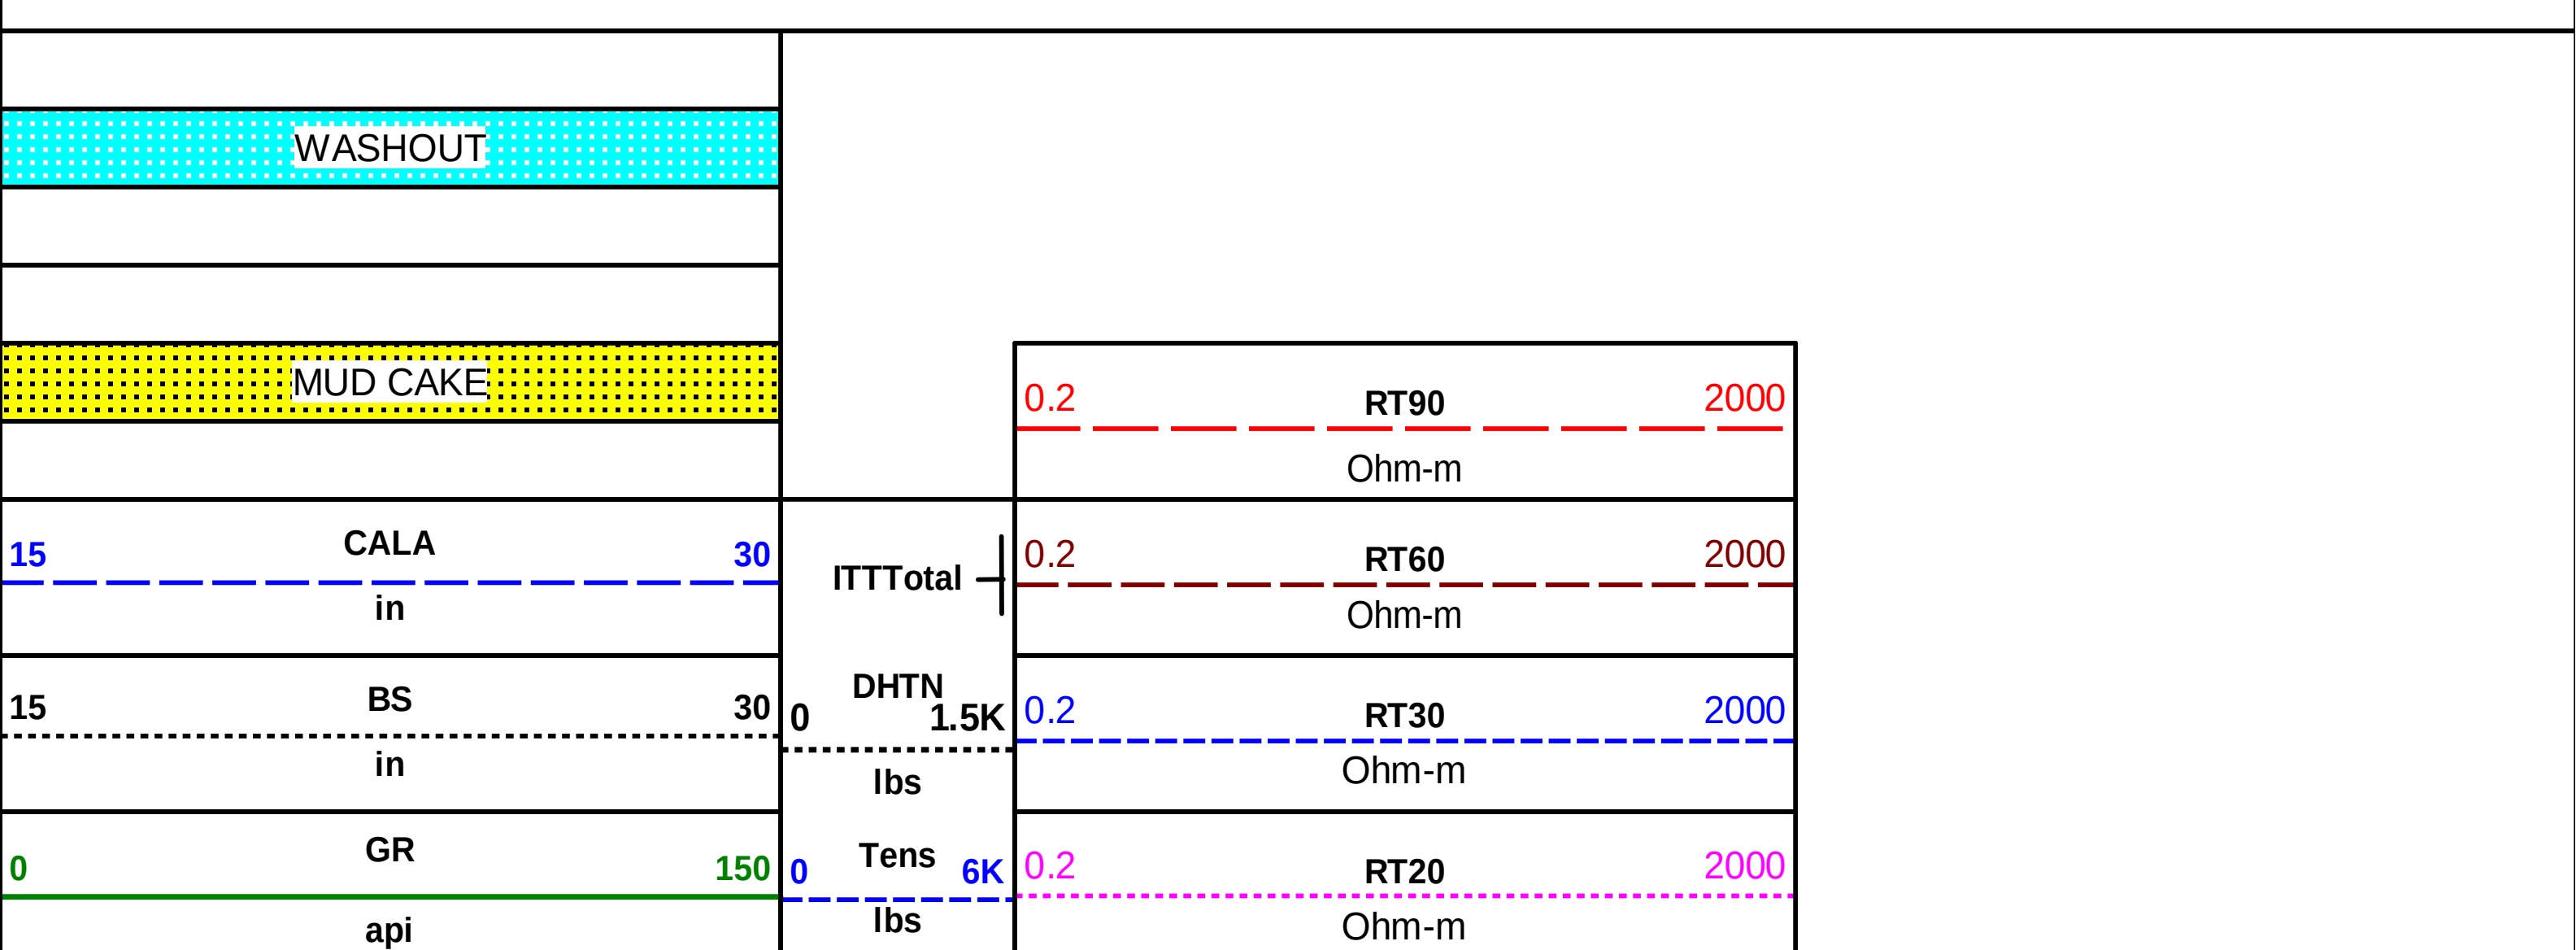

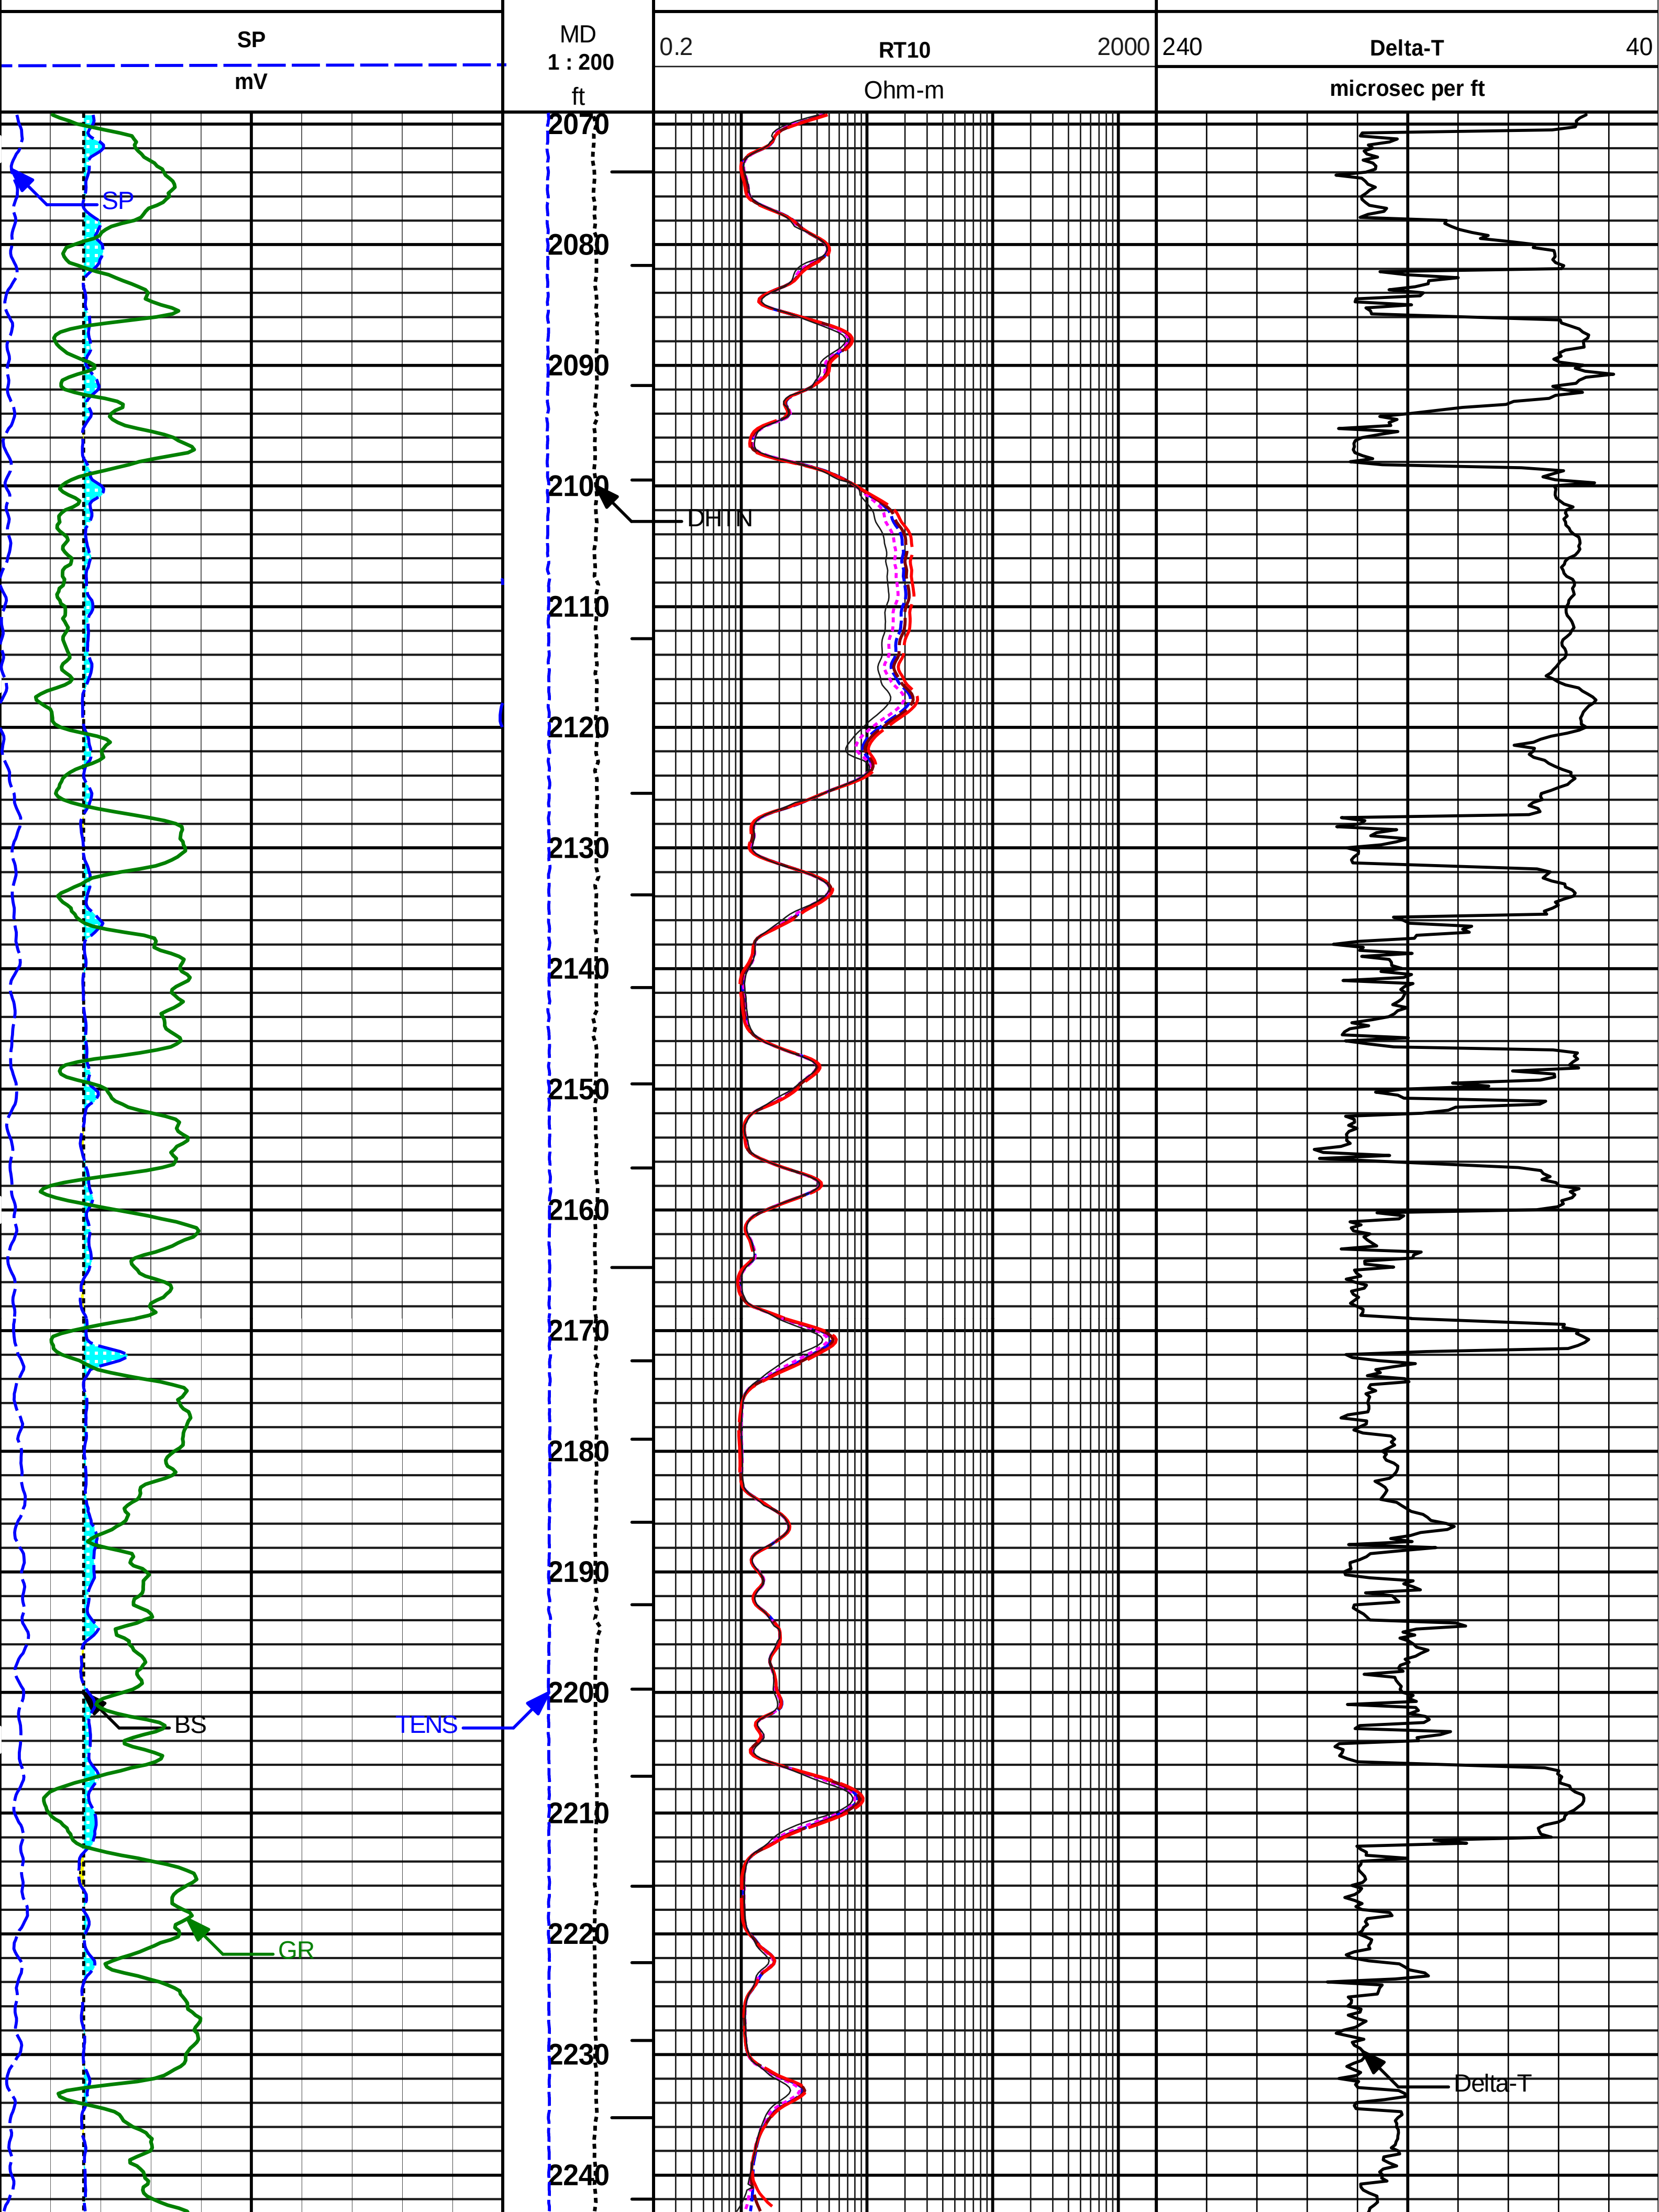
SP
mV
MD
1 : 200
ft
0.2
RT10
2000
Ohm-m
240
Delta-T
40
microsec per ft
2070
2080
2090
2100
2110
2120
2130
2140
2150
2160
2170
2180
2190
2200
2210
2220
2230
2240
SP
DHTN
BS
TENS
GR
Delta-T

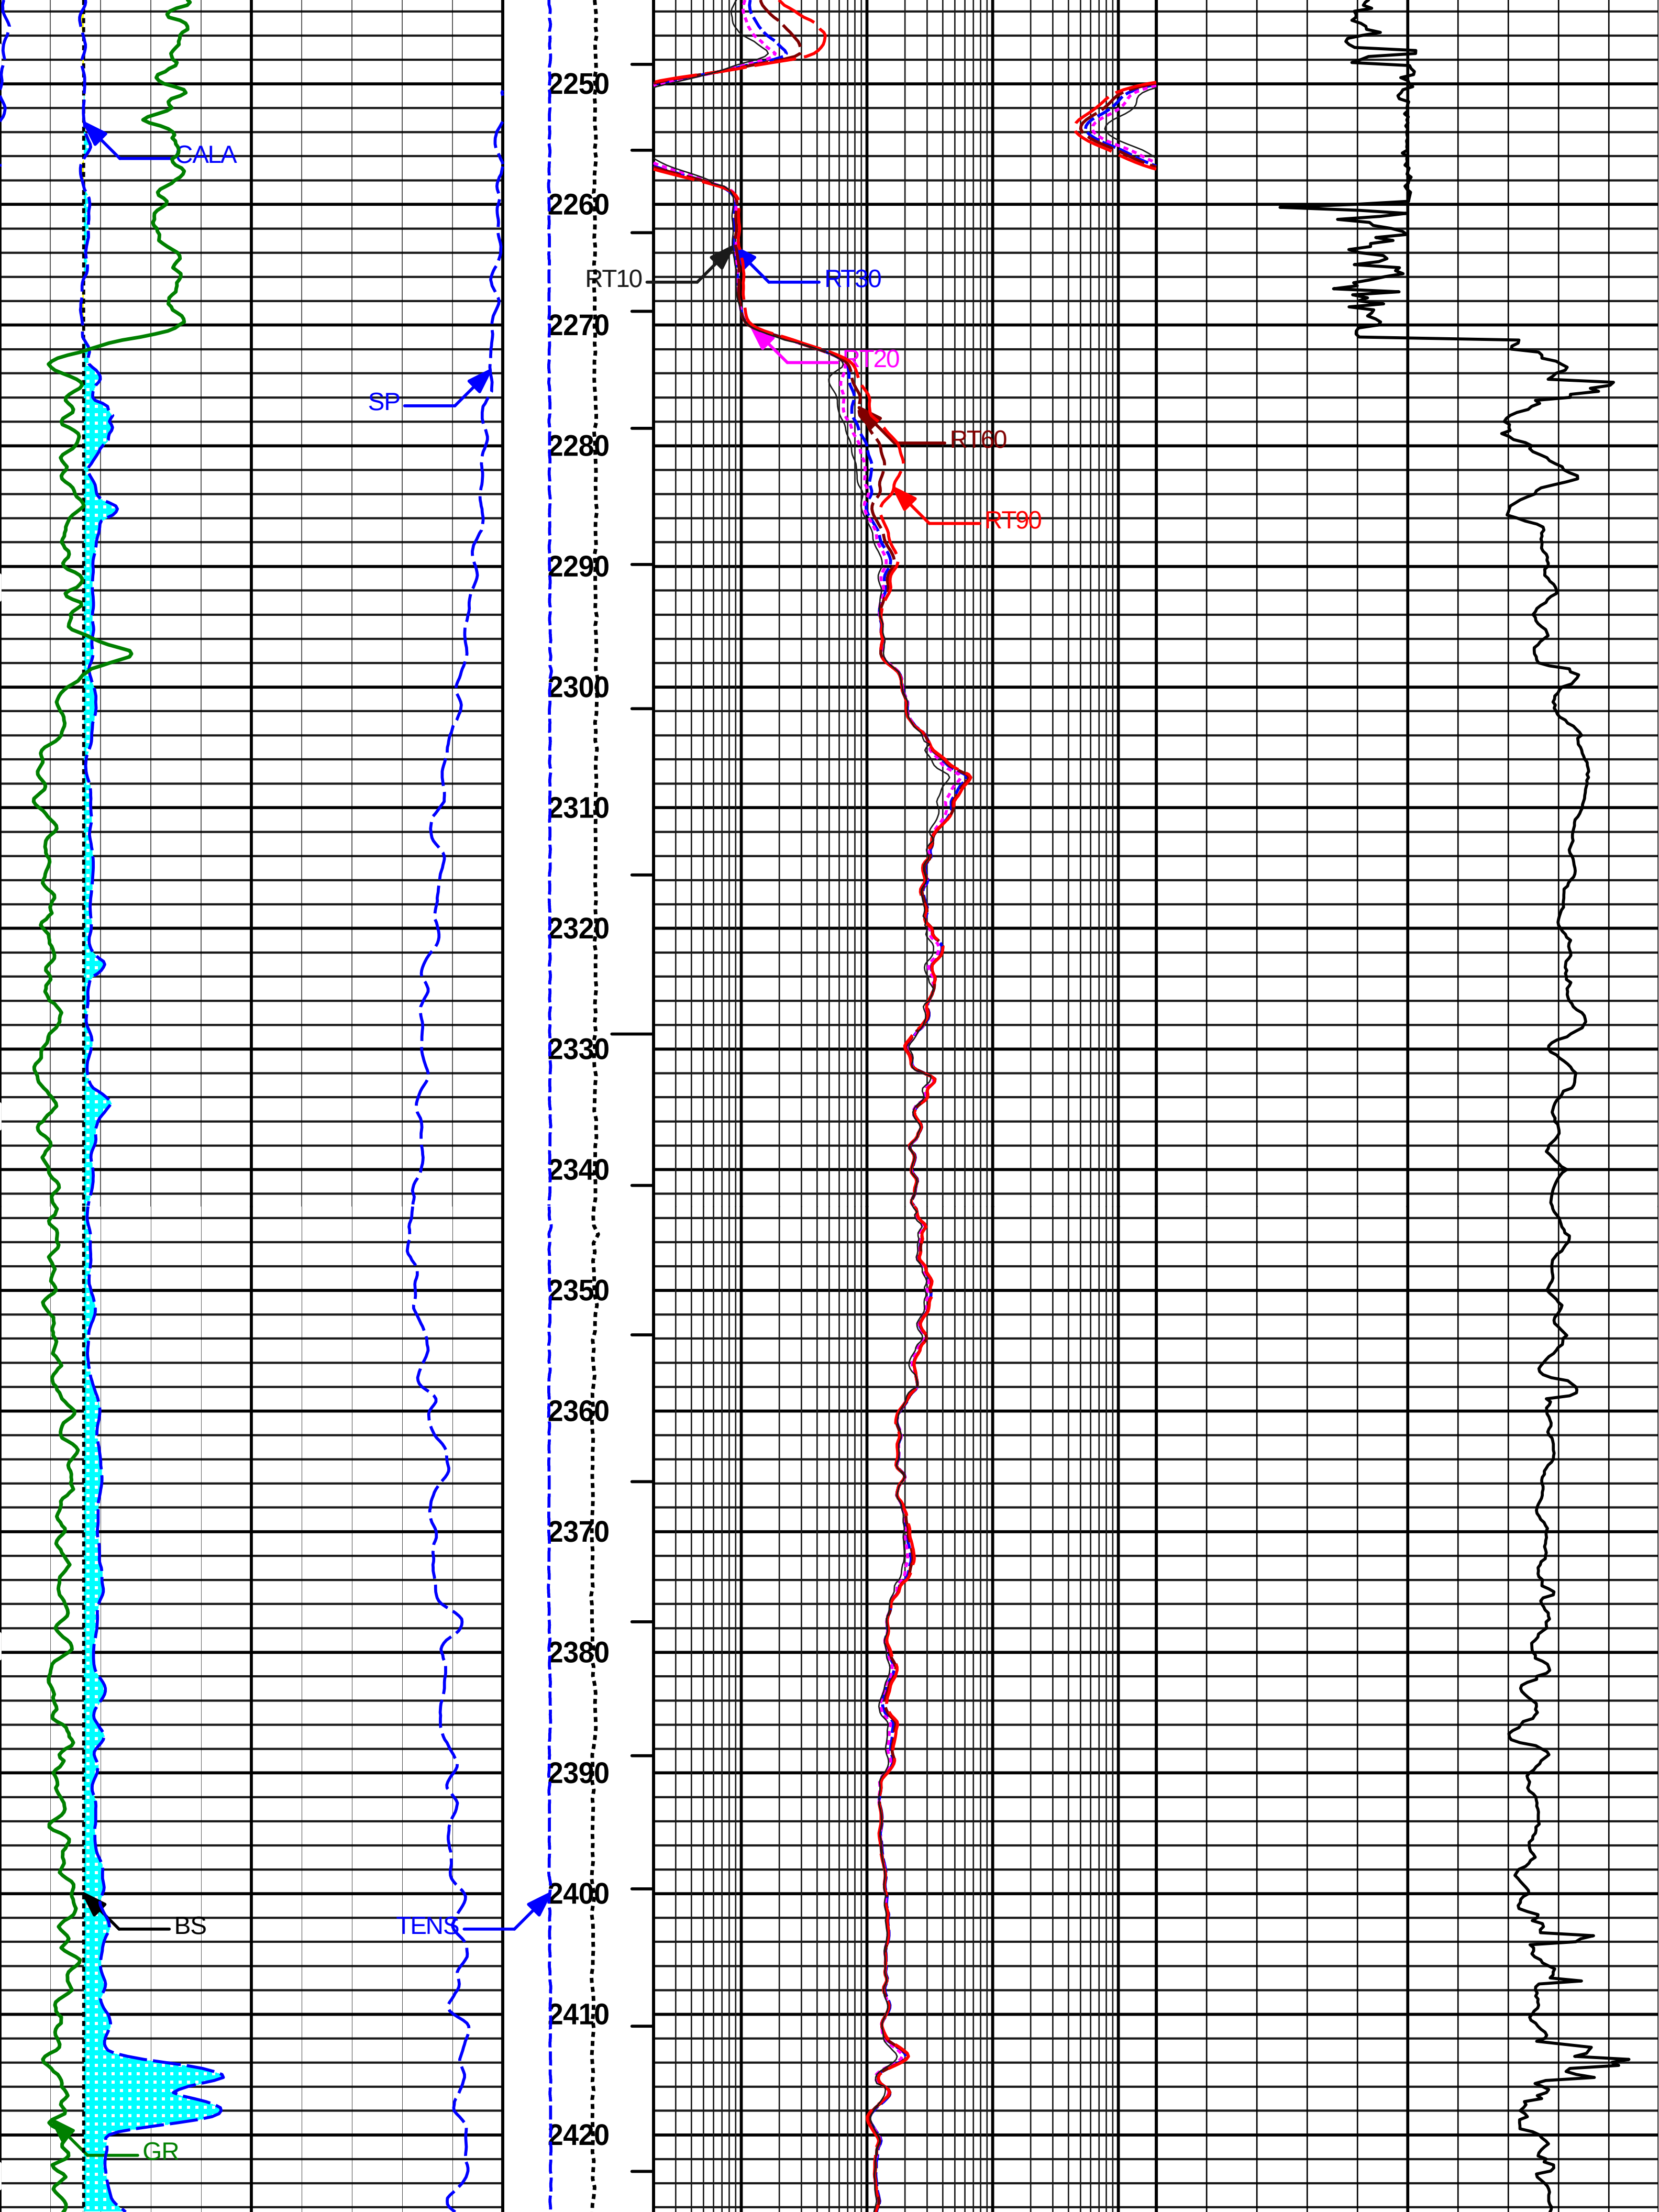

CALA
SP
BS
TENS
GR
2250
2260
2270
2280
2290
2300
2310
2320
2330
2340
2350
2360
2370
2380
2390
2400
2410
2420
RT10
RT30
RT20
RT60
RT90

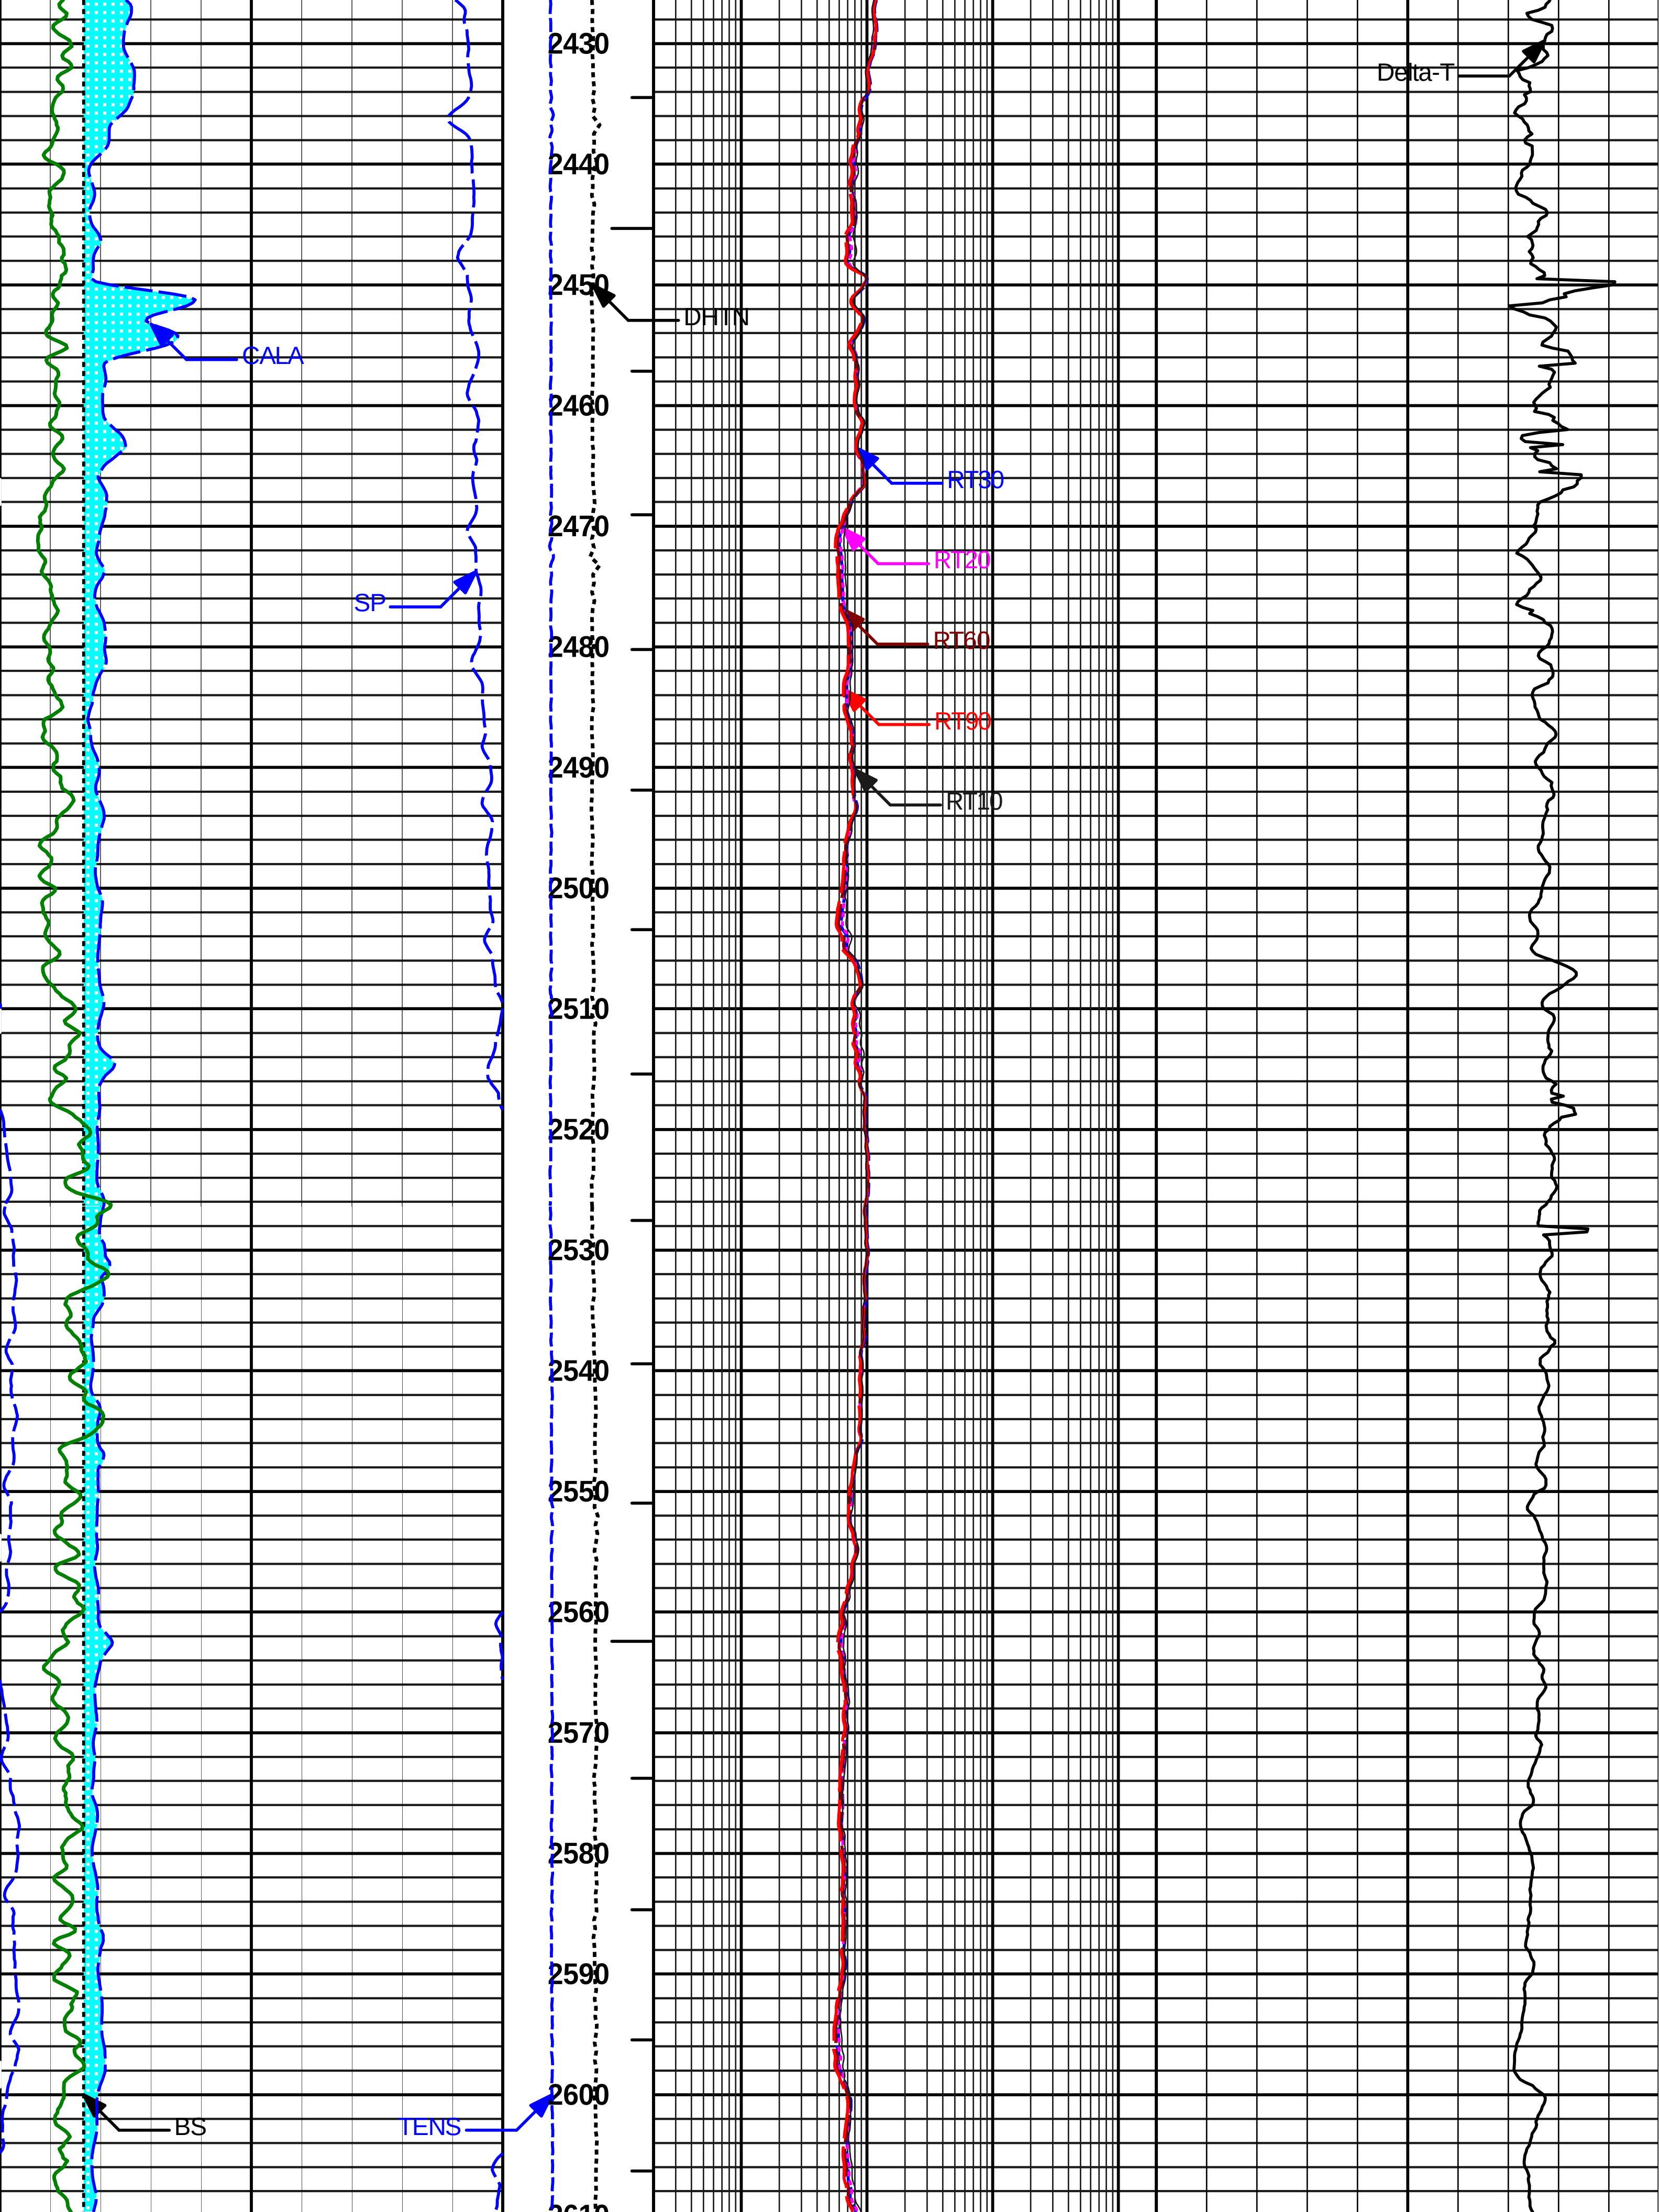

2430
2440
2450
2460
2470
2480
2490
2500
2510
2520
2530
2540
2550
2560
2570
2580
2590
2600
DHTN
CALA
SP
BS
TENS
RT30
RT20
RT60
RT90
RT10
Delta-T

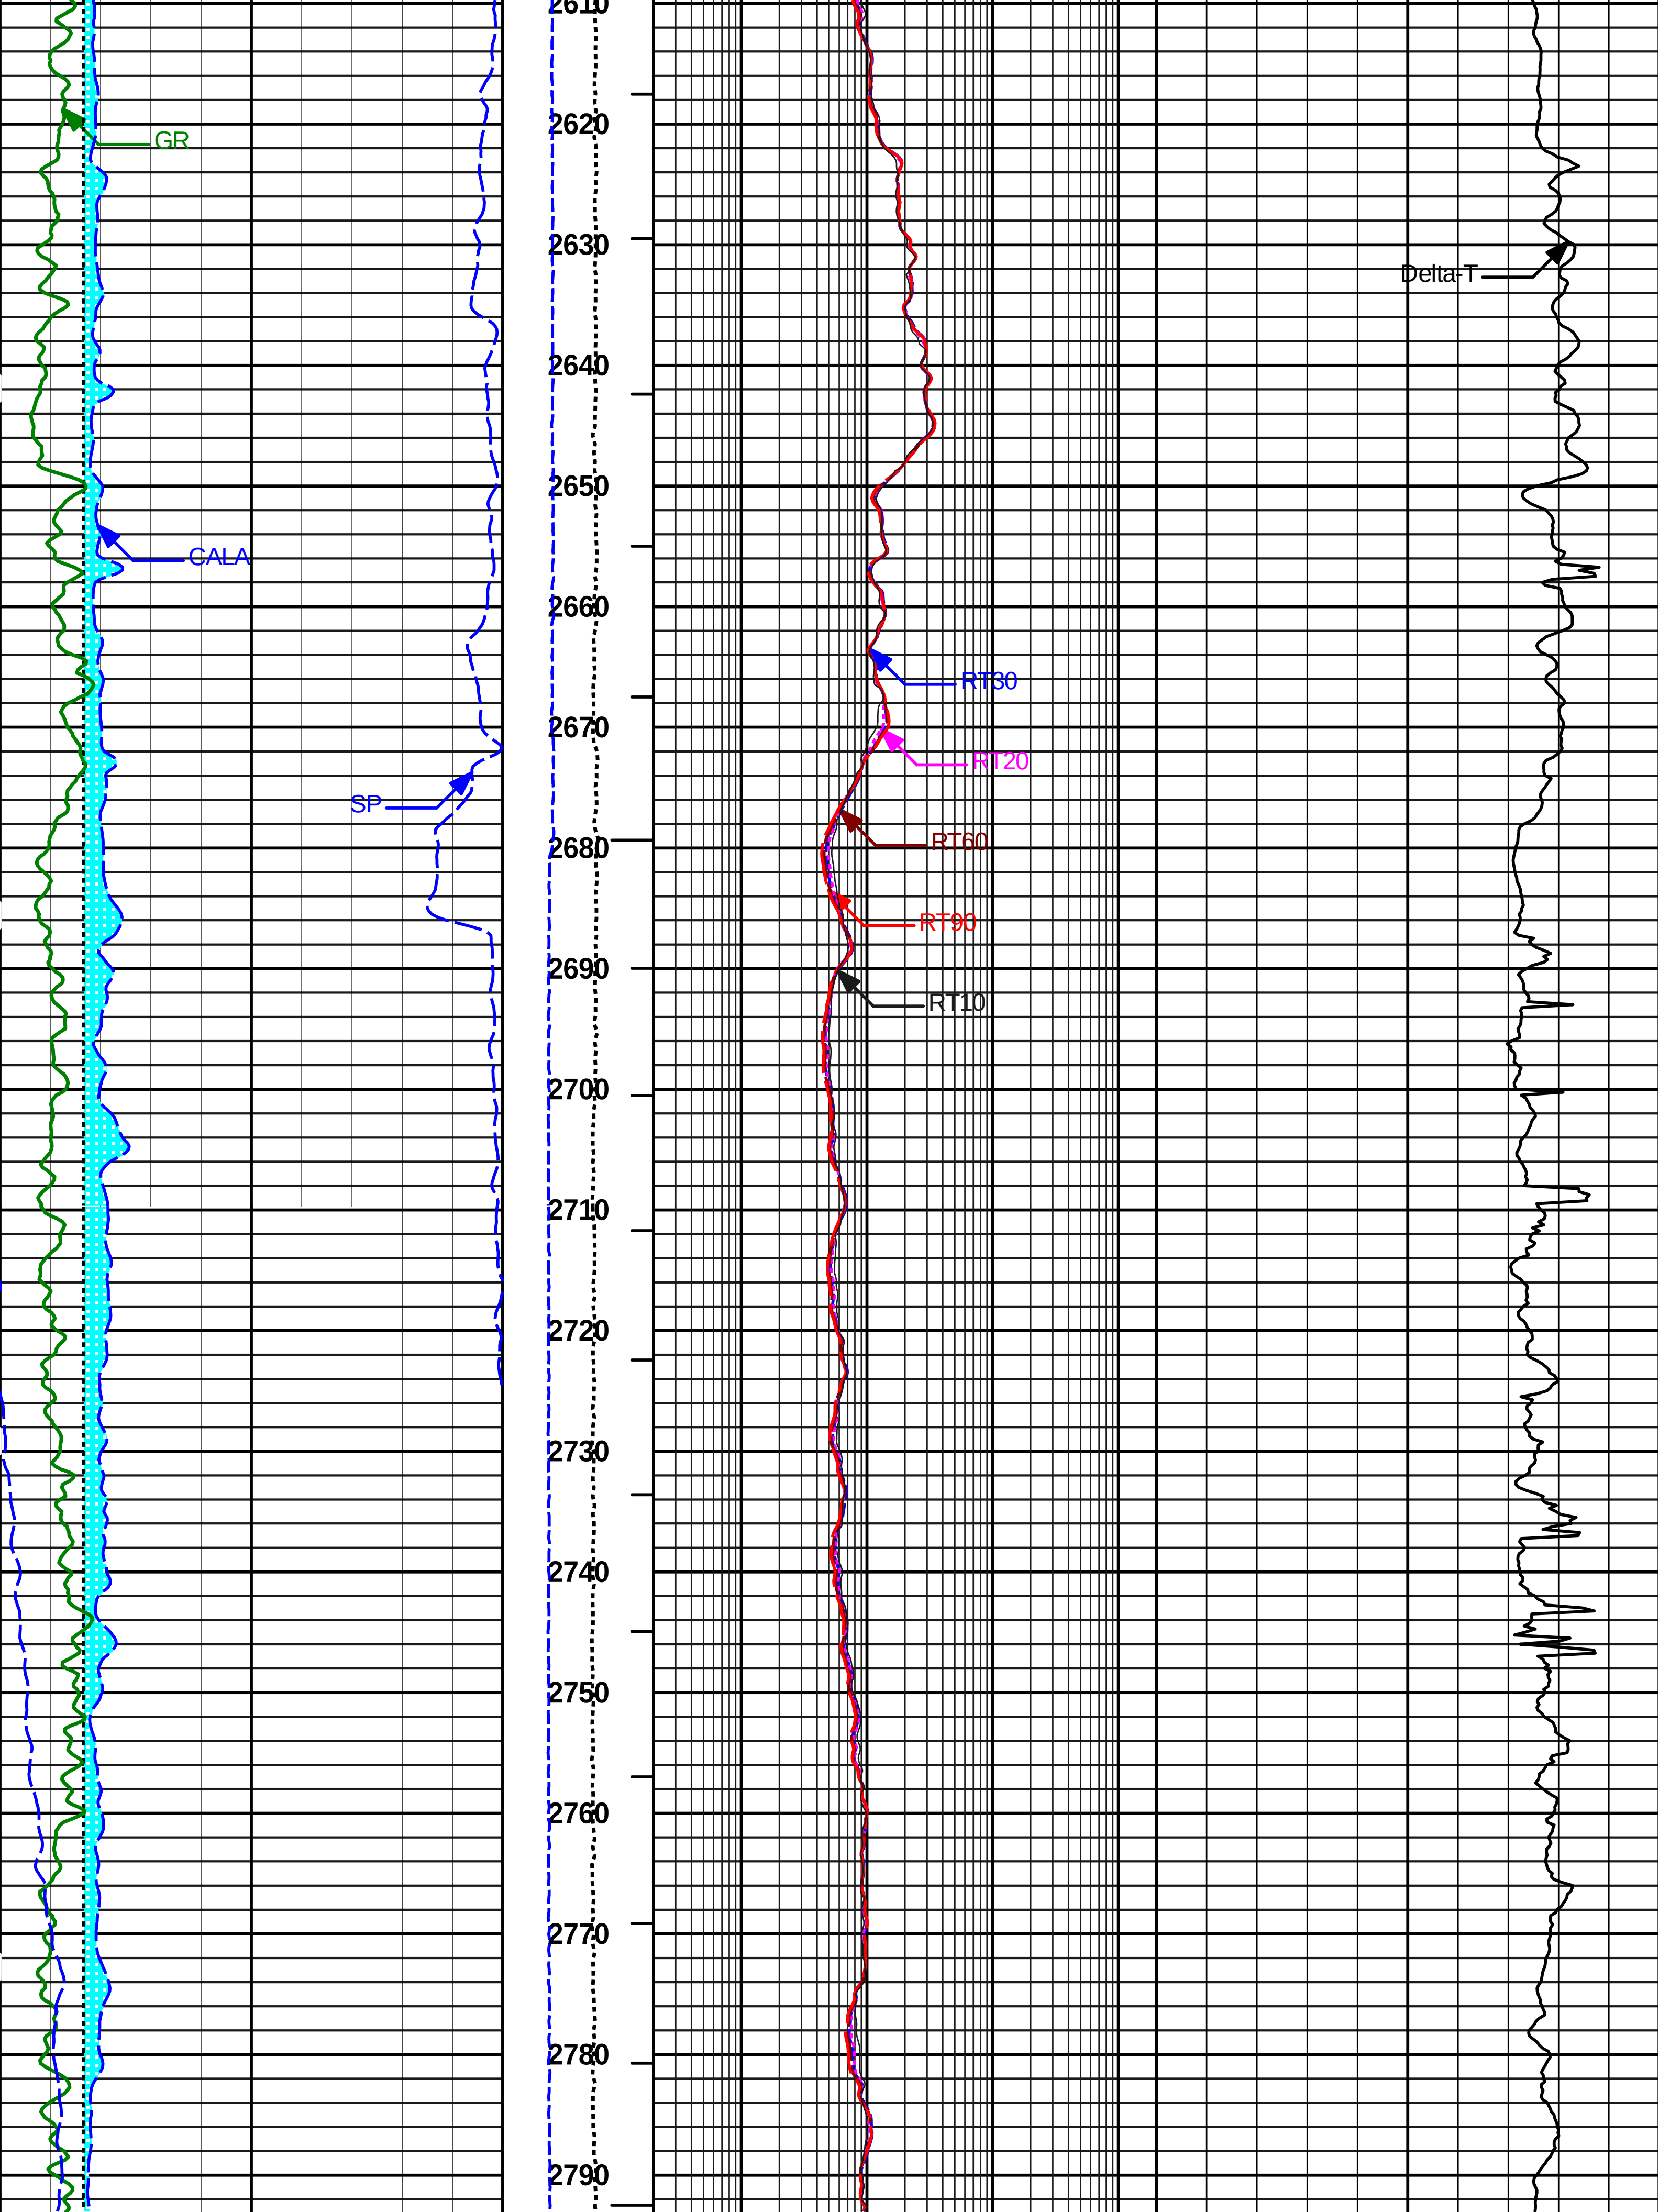
GR
CALA
SP
RT30
RT20
RT60
RT90
RT10
Delta-T
2610
2620
2630
2640
2650
2660
2670
2680
2690
2700
2710
2720
2730
2740
2750
2760
2770
2780
2790

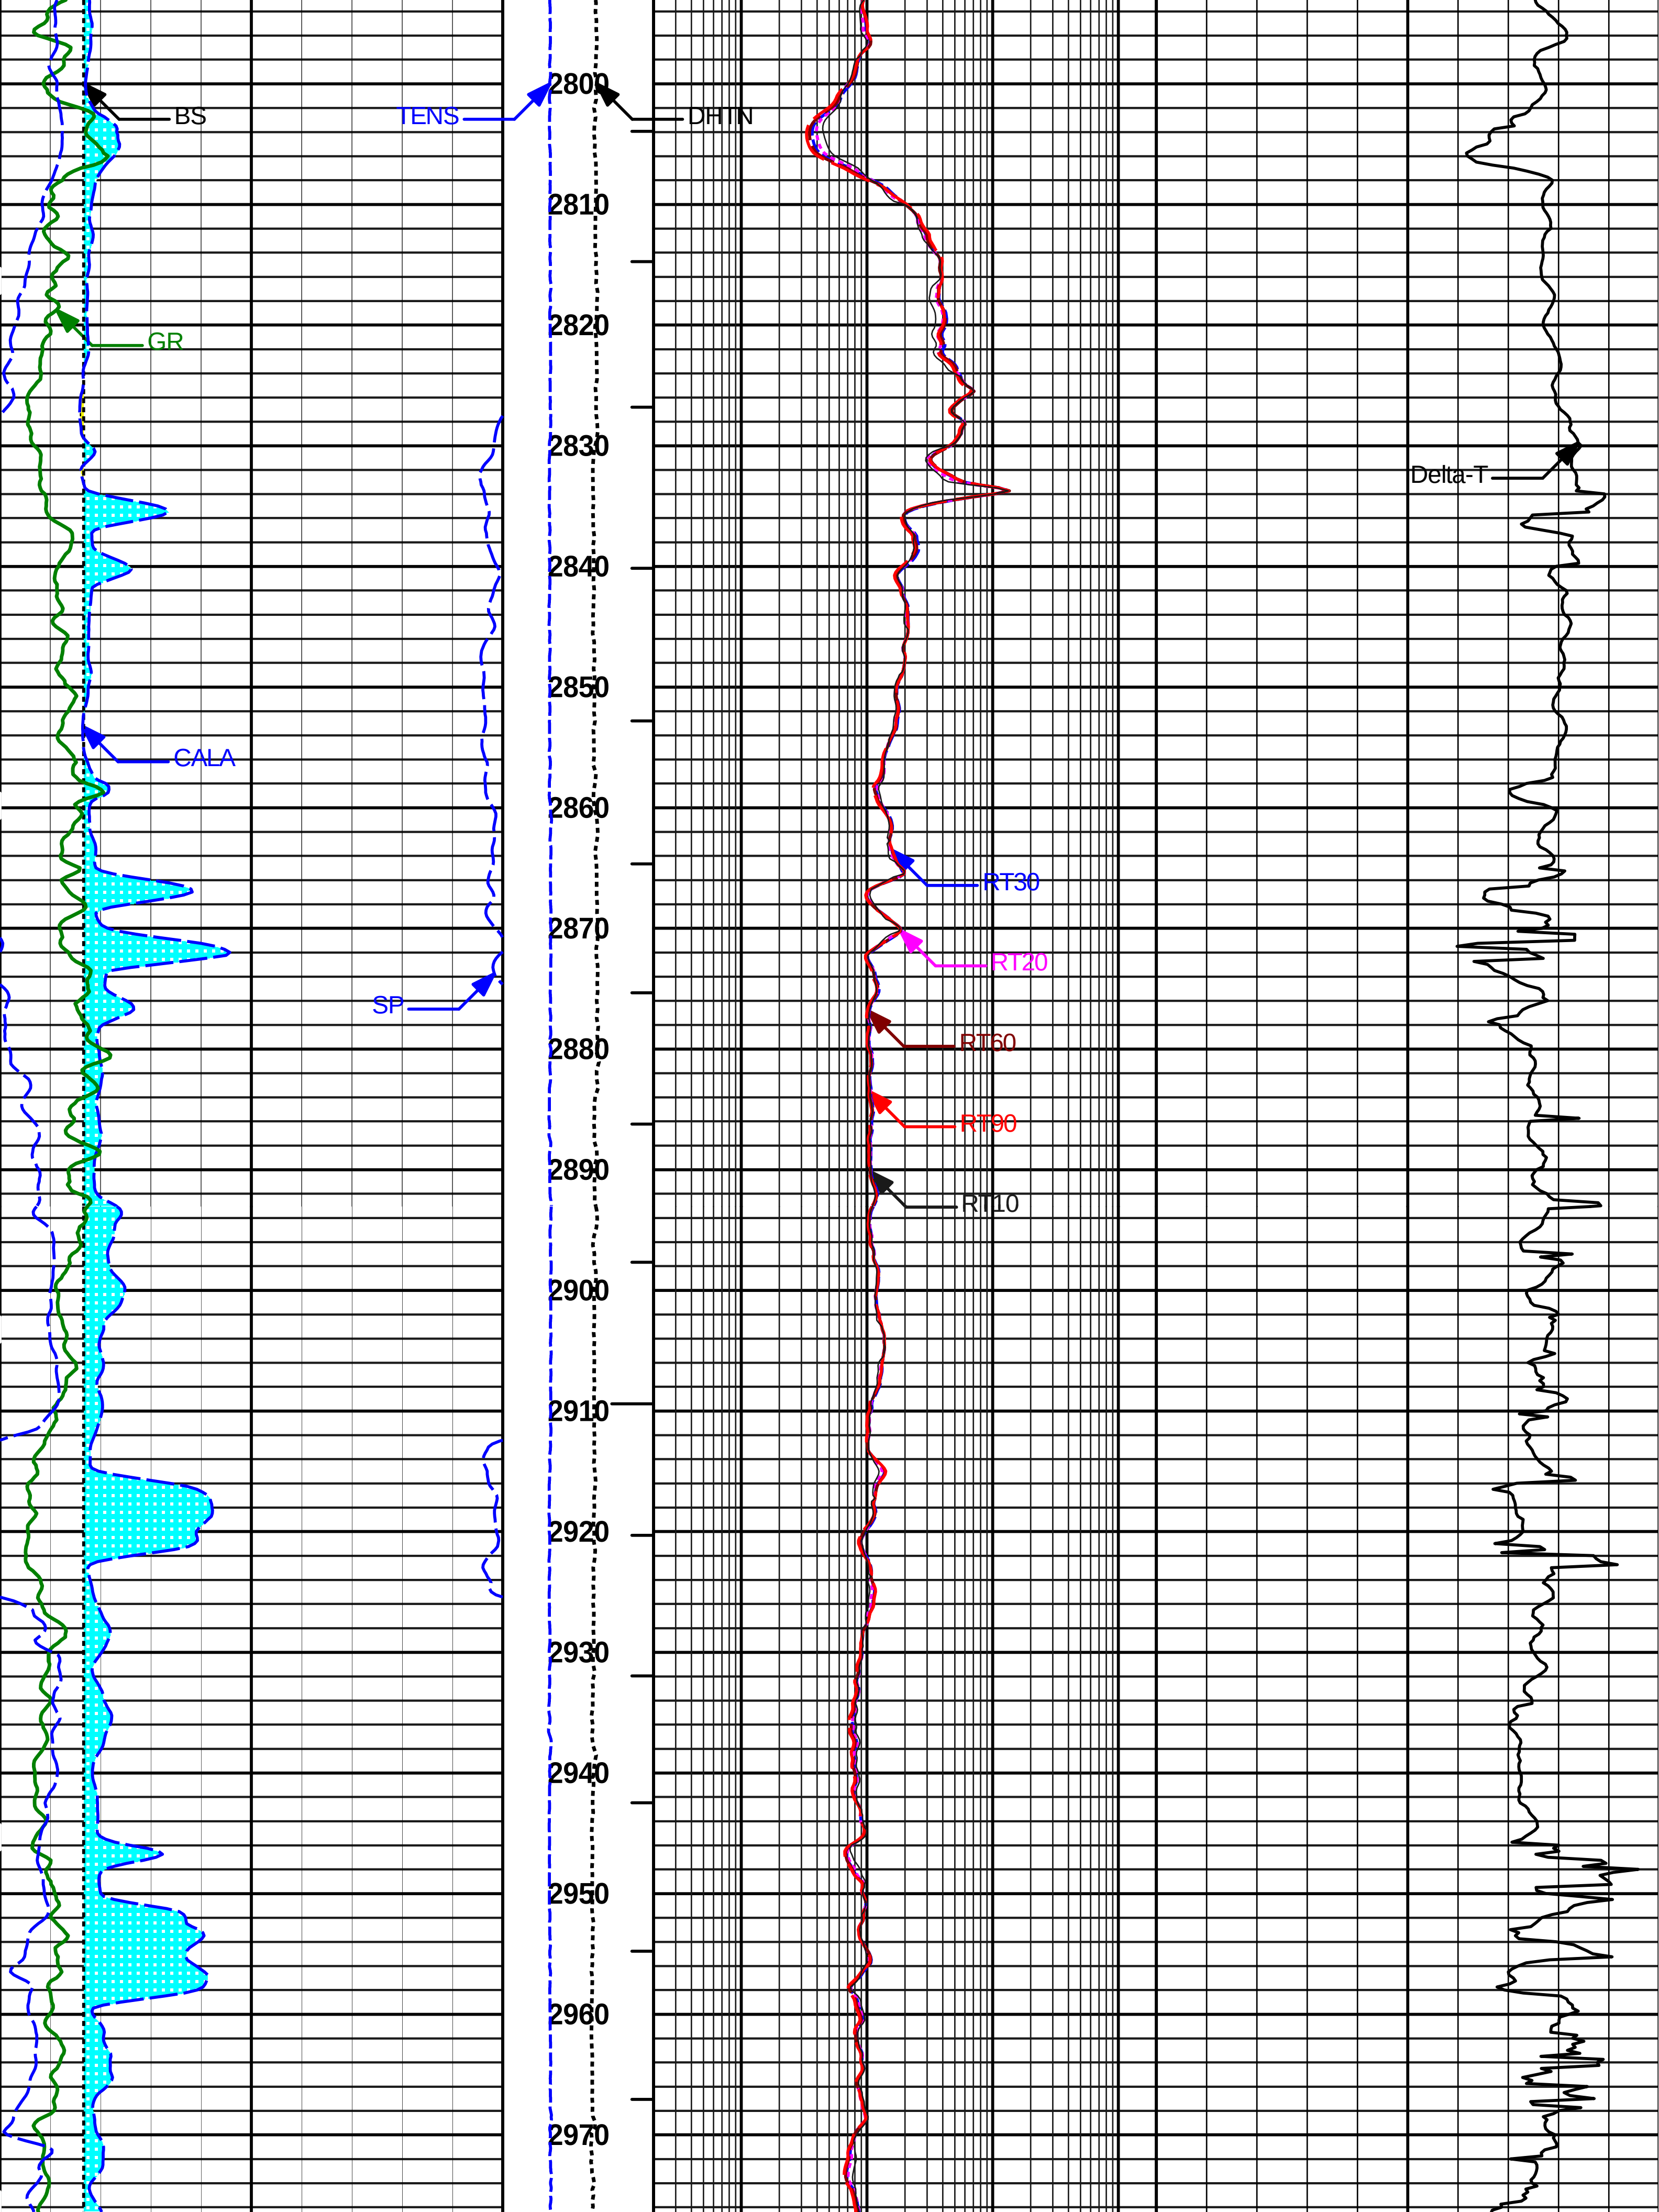
BS
TENS
DHTN
GR
CALA
SP
RT30
RT20
RT60
RT90
RT10
Delta-T
2800
2810
2820
2830
2840
2850
2860
2870
2880
2890
2900
2910
2920
2930
2940
2950
2960
2970

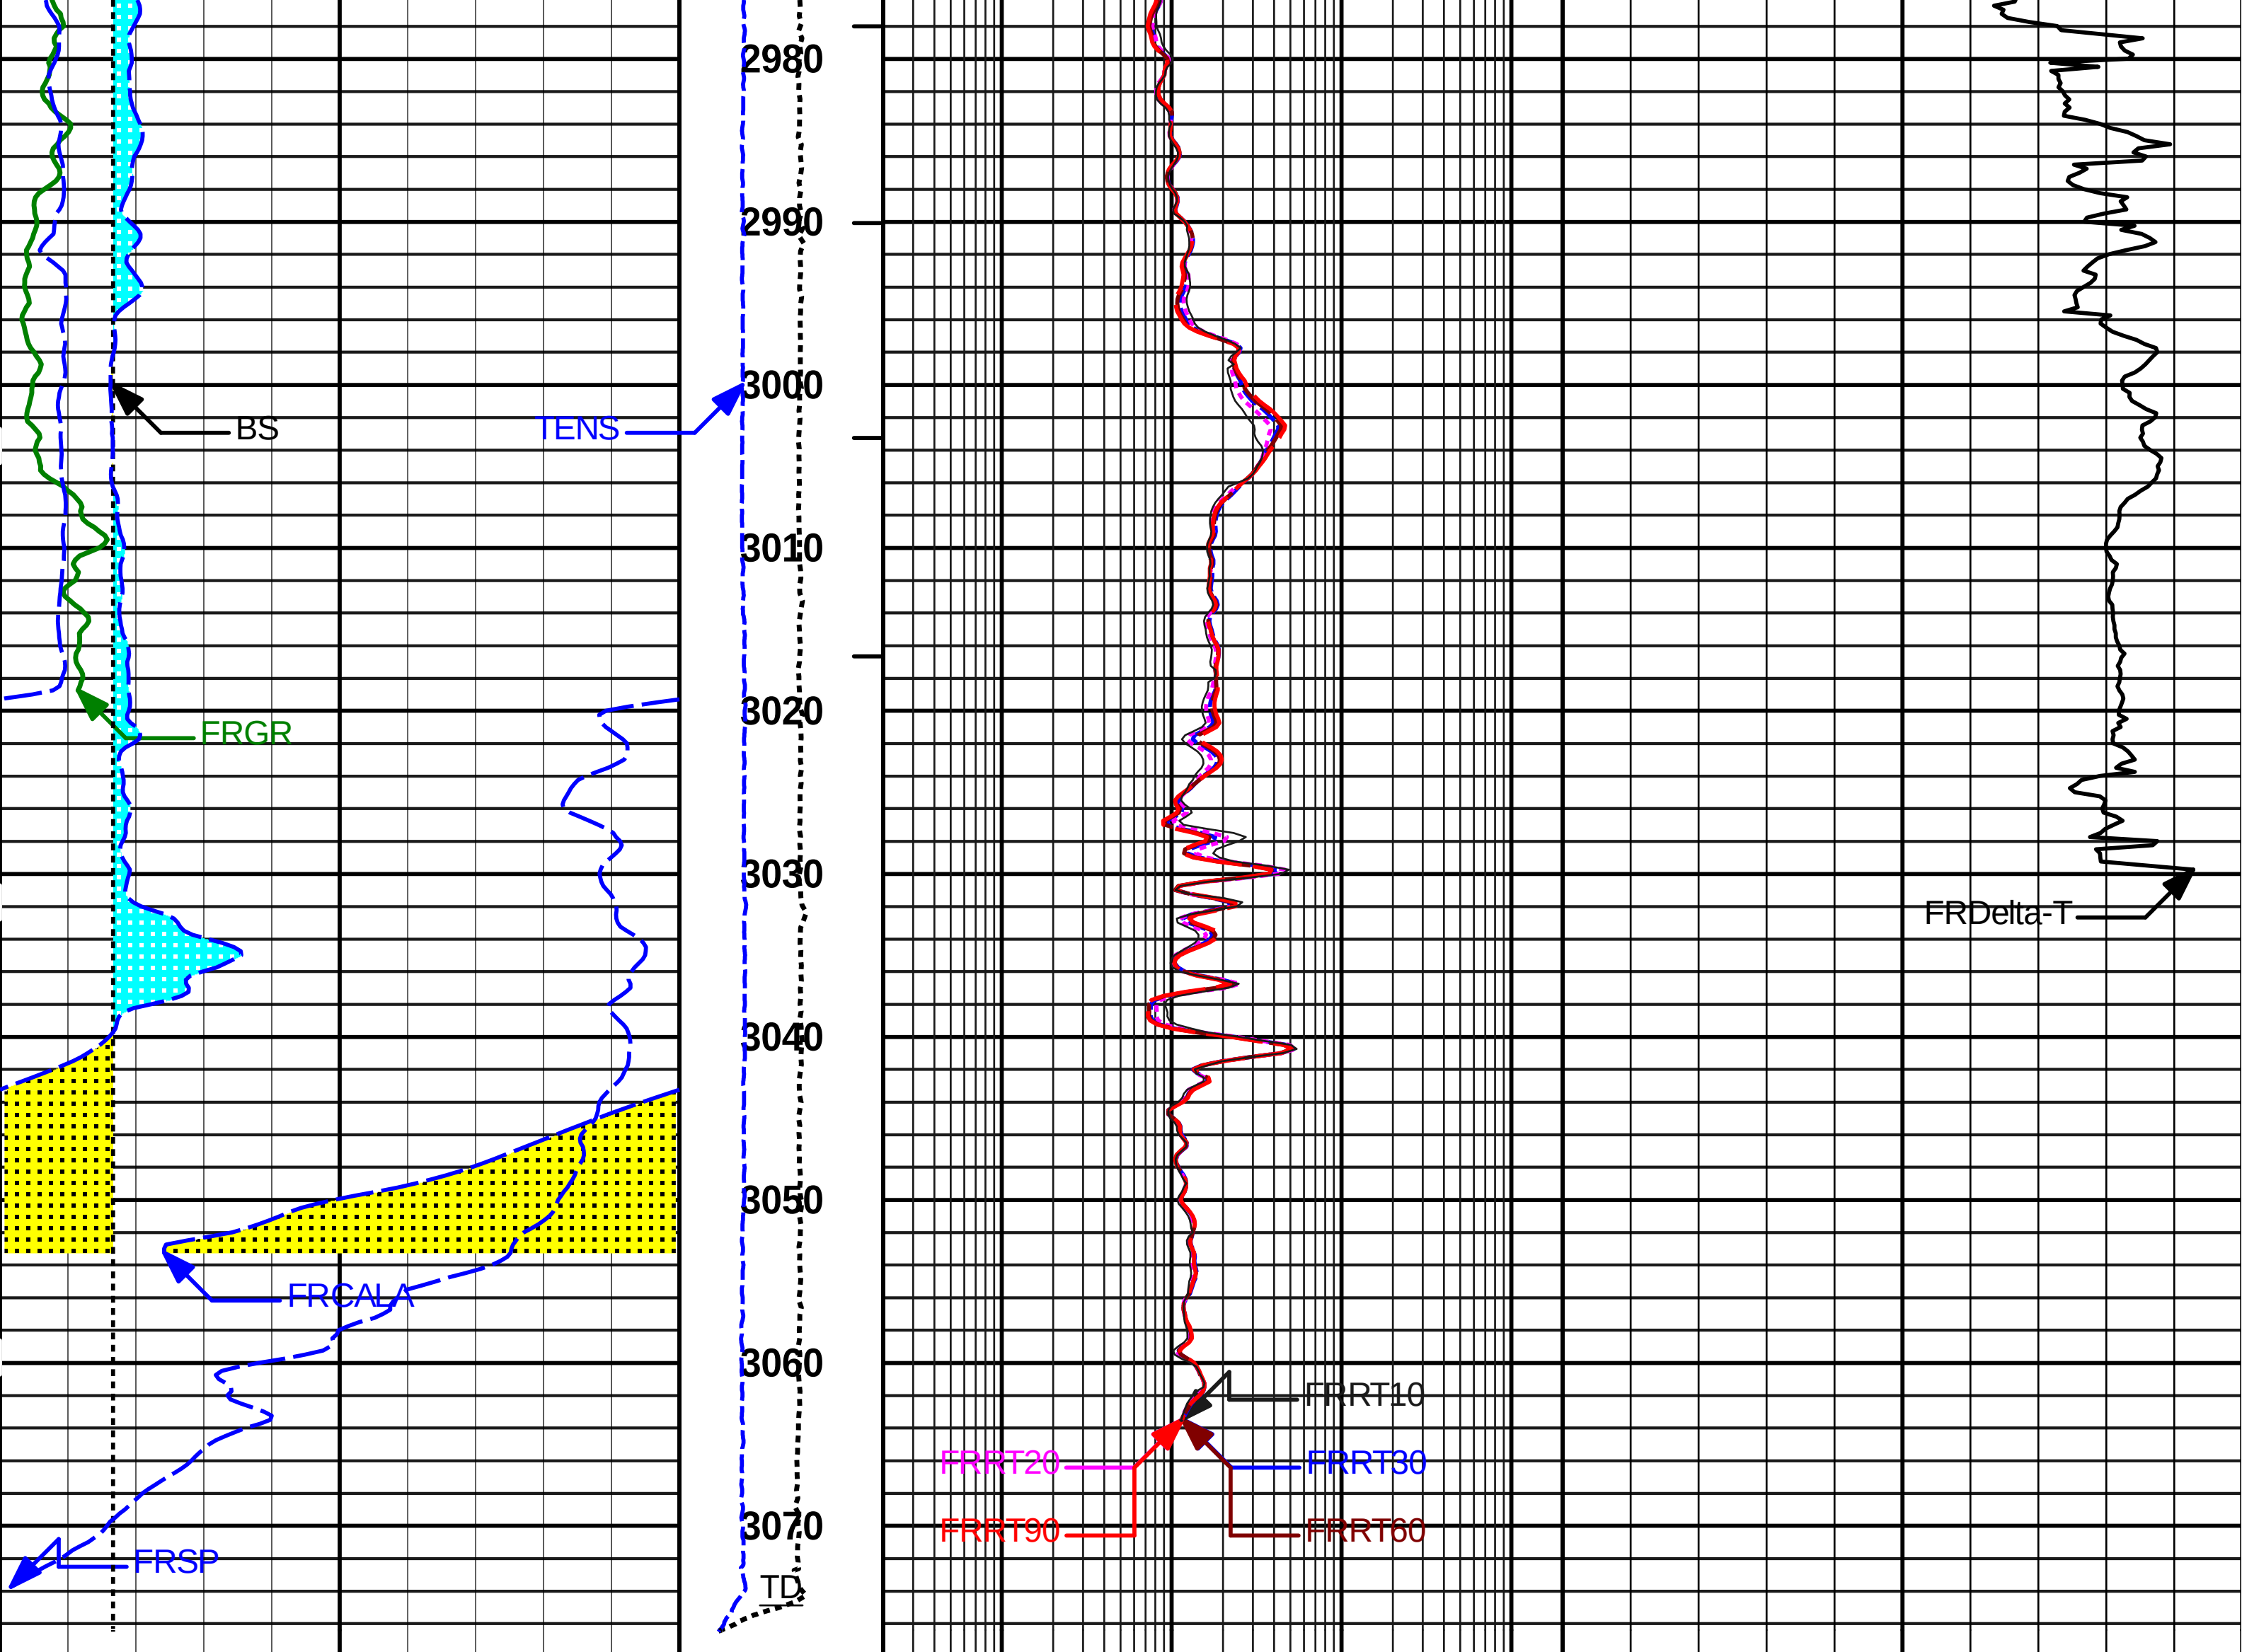

SP	MD	0.2 RT10 2000	240 Delta-T 40
mV	1 : 200 ft	Ohm-m	microsec per ft
0 GR 150	0 Tens 6K	0.2 RT20 2000	
api	lbs	Ohm-m	
15 BS 30	0 DHTN 1.5K	0.2 RT30 2000	
in	lbs	Ohm-m	
15 CALA 30	ITTTotal	0.2 RT60 2000	
in		Ohm-m	
		0.2 RT90 2000	
MUD CAKE		Ohm-m	
WASHOUT			

HALLIBURTON

Plot Time: 05-Dec-25 10:44:47

Plot Range: 2069 ft to 3078 ft

Data: 345-6 OH\Well Based\MAIN PASS*

Plot File: \\COMP 200\MAIN- 200CR

MAIN PASS
(SCALE 1:200)

HALLIBURTON

Plot Time: 05-Dec-25 10:44:48
Plot Range: 2160 ft to 2360 ft
Data: 345-6 OH\Well Based\REPEAT PASS*
Plot File: \\COMP 200\RPT- 200CR

REPEAT PASS
(SCALE 1:200)

WASHOUT

MUD CAKE

0.2 **RT90** 2000
Ohm-m

15 **CALA** 30
in

ITTTotal

0.2 **RT60** 2000
Ohm-m

15 **BS** 30
in

0 **DHTN** 1.5K
lbs

0.2 **RT30** 2000
Ohm-m

0 **GR** 150
api

0 **Tens** 6K
lbs

0.2 **RT20** 2000
Ohm-m

SP
mV

MD
1 : 200
ft

0.2 **RT10** 2000
Ohm-m

240 **Delta-T** 40
microsec per ft

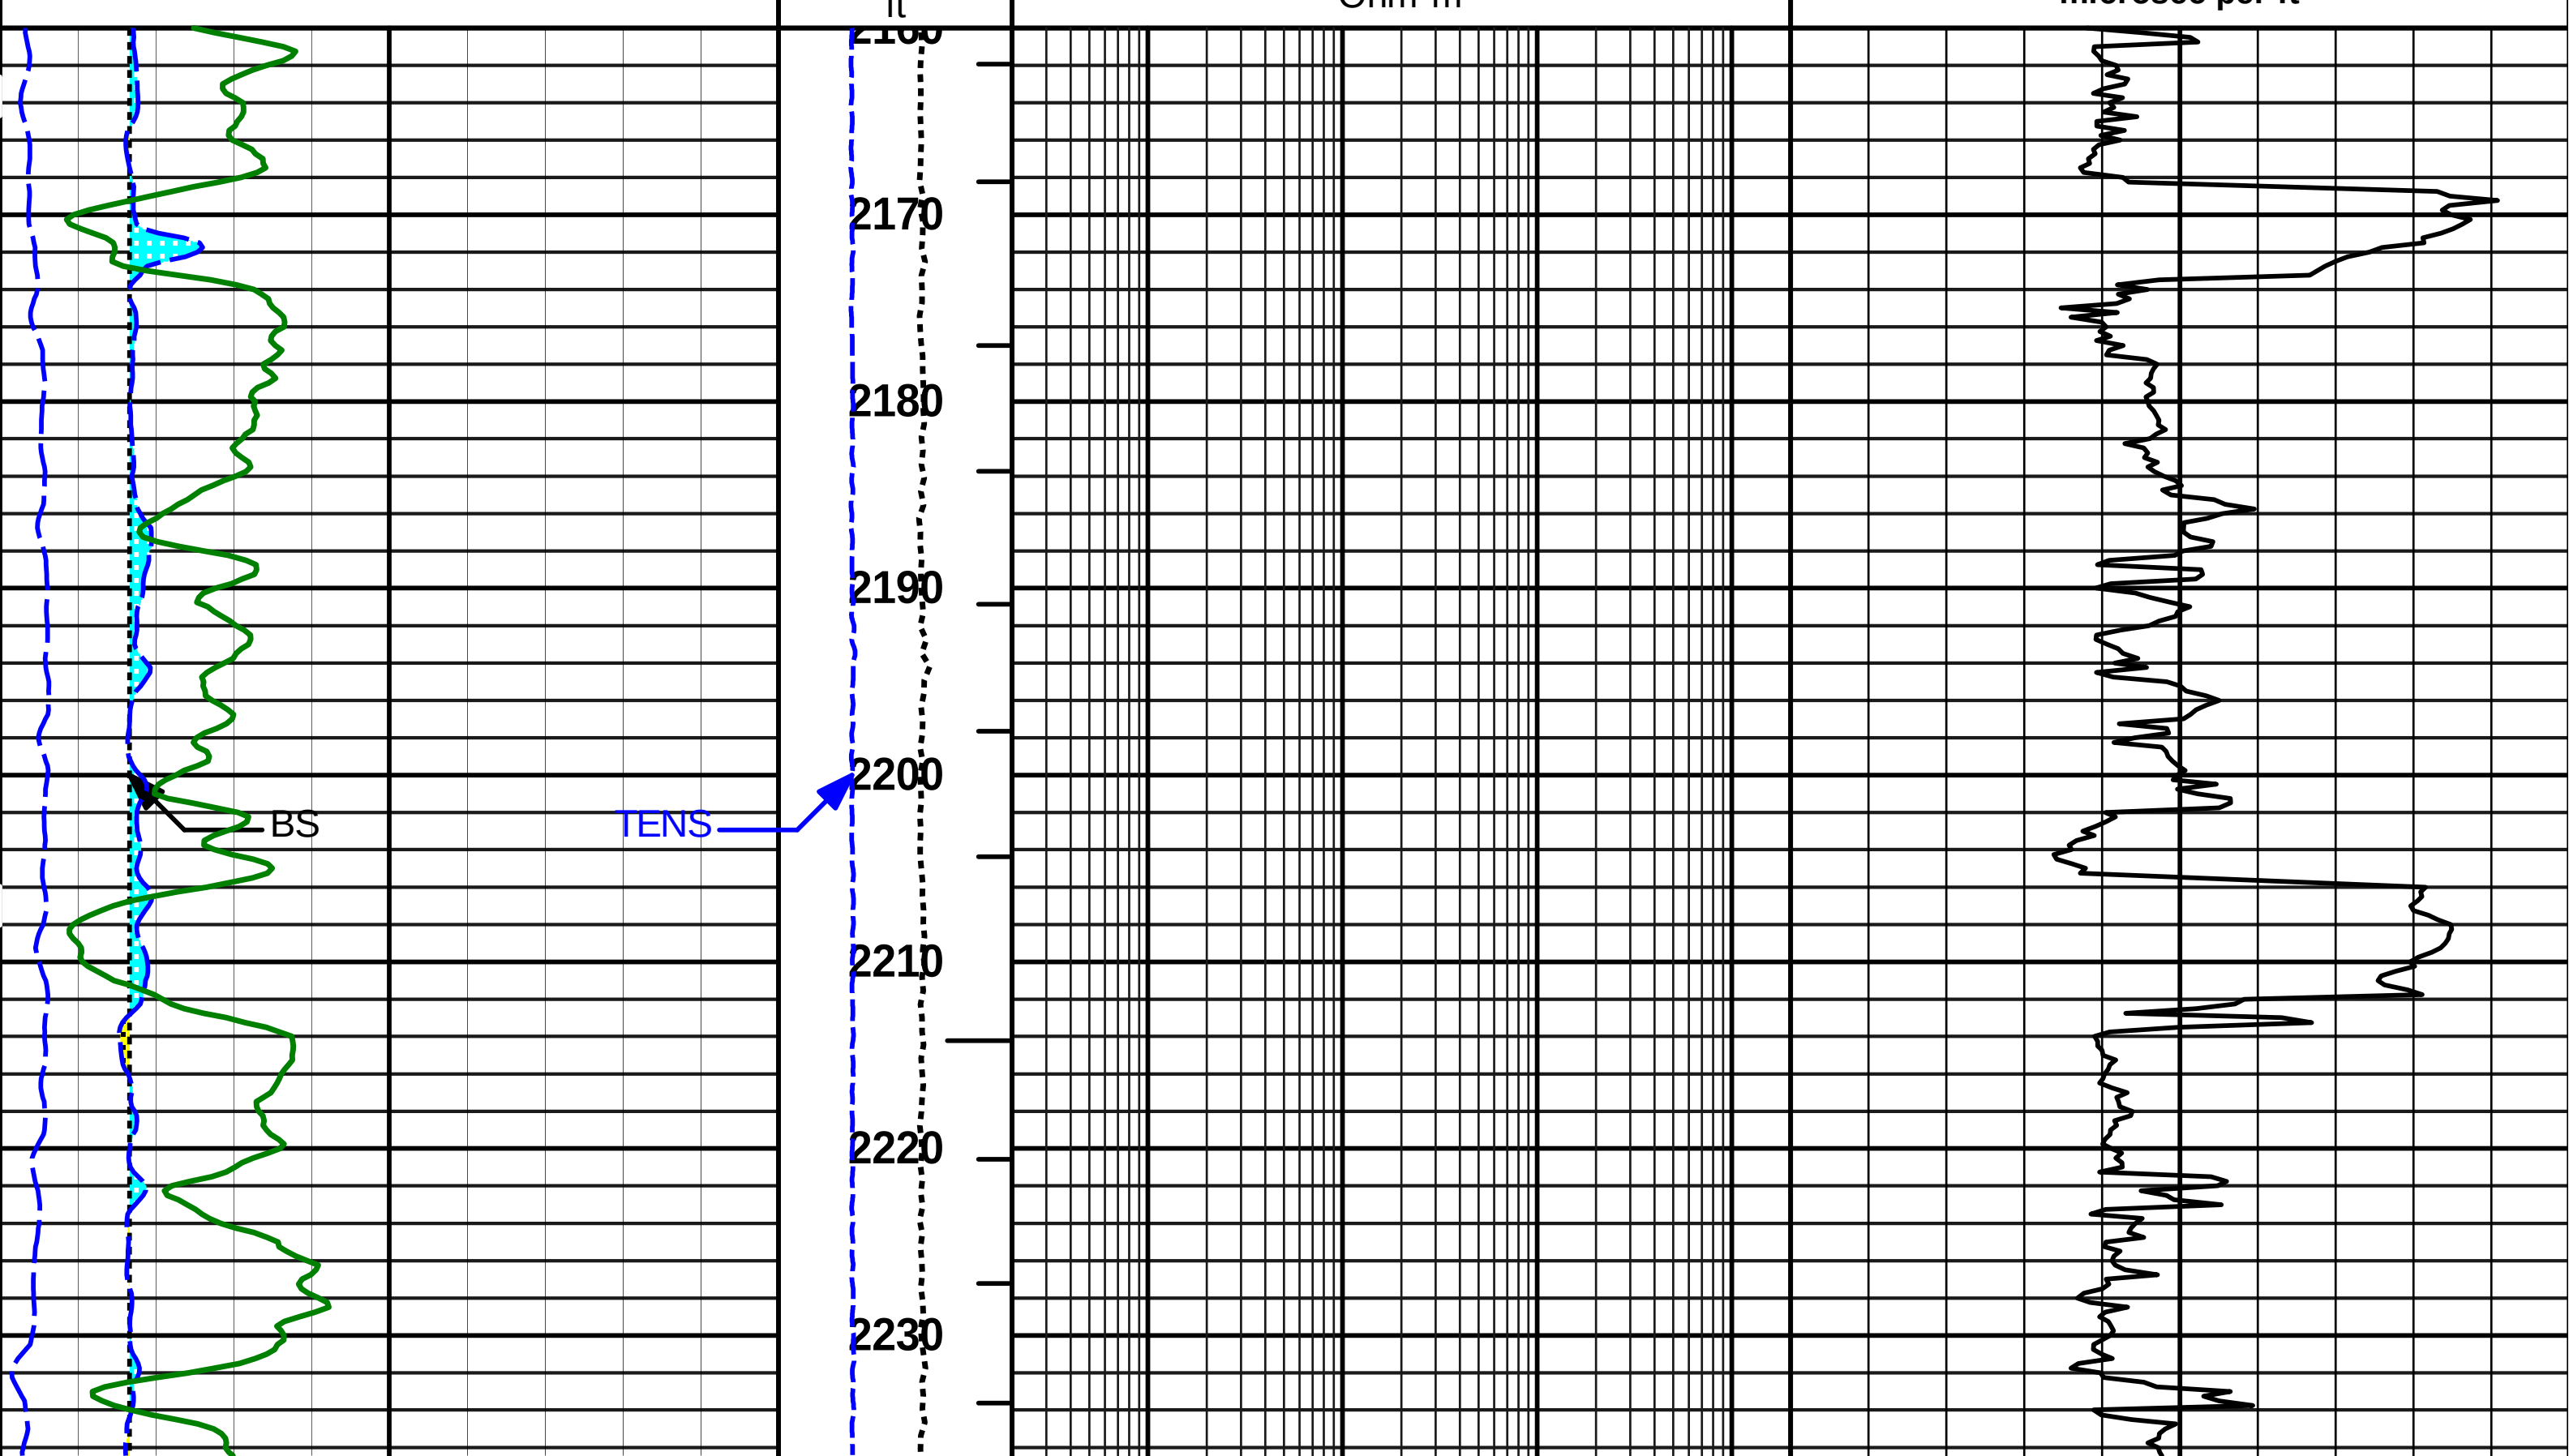

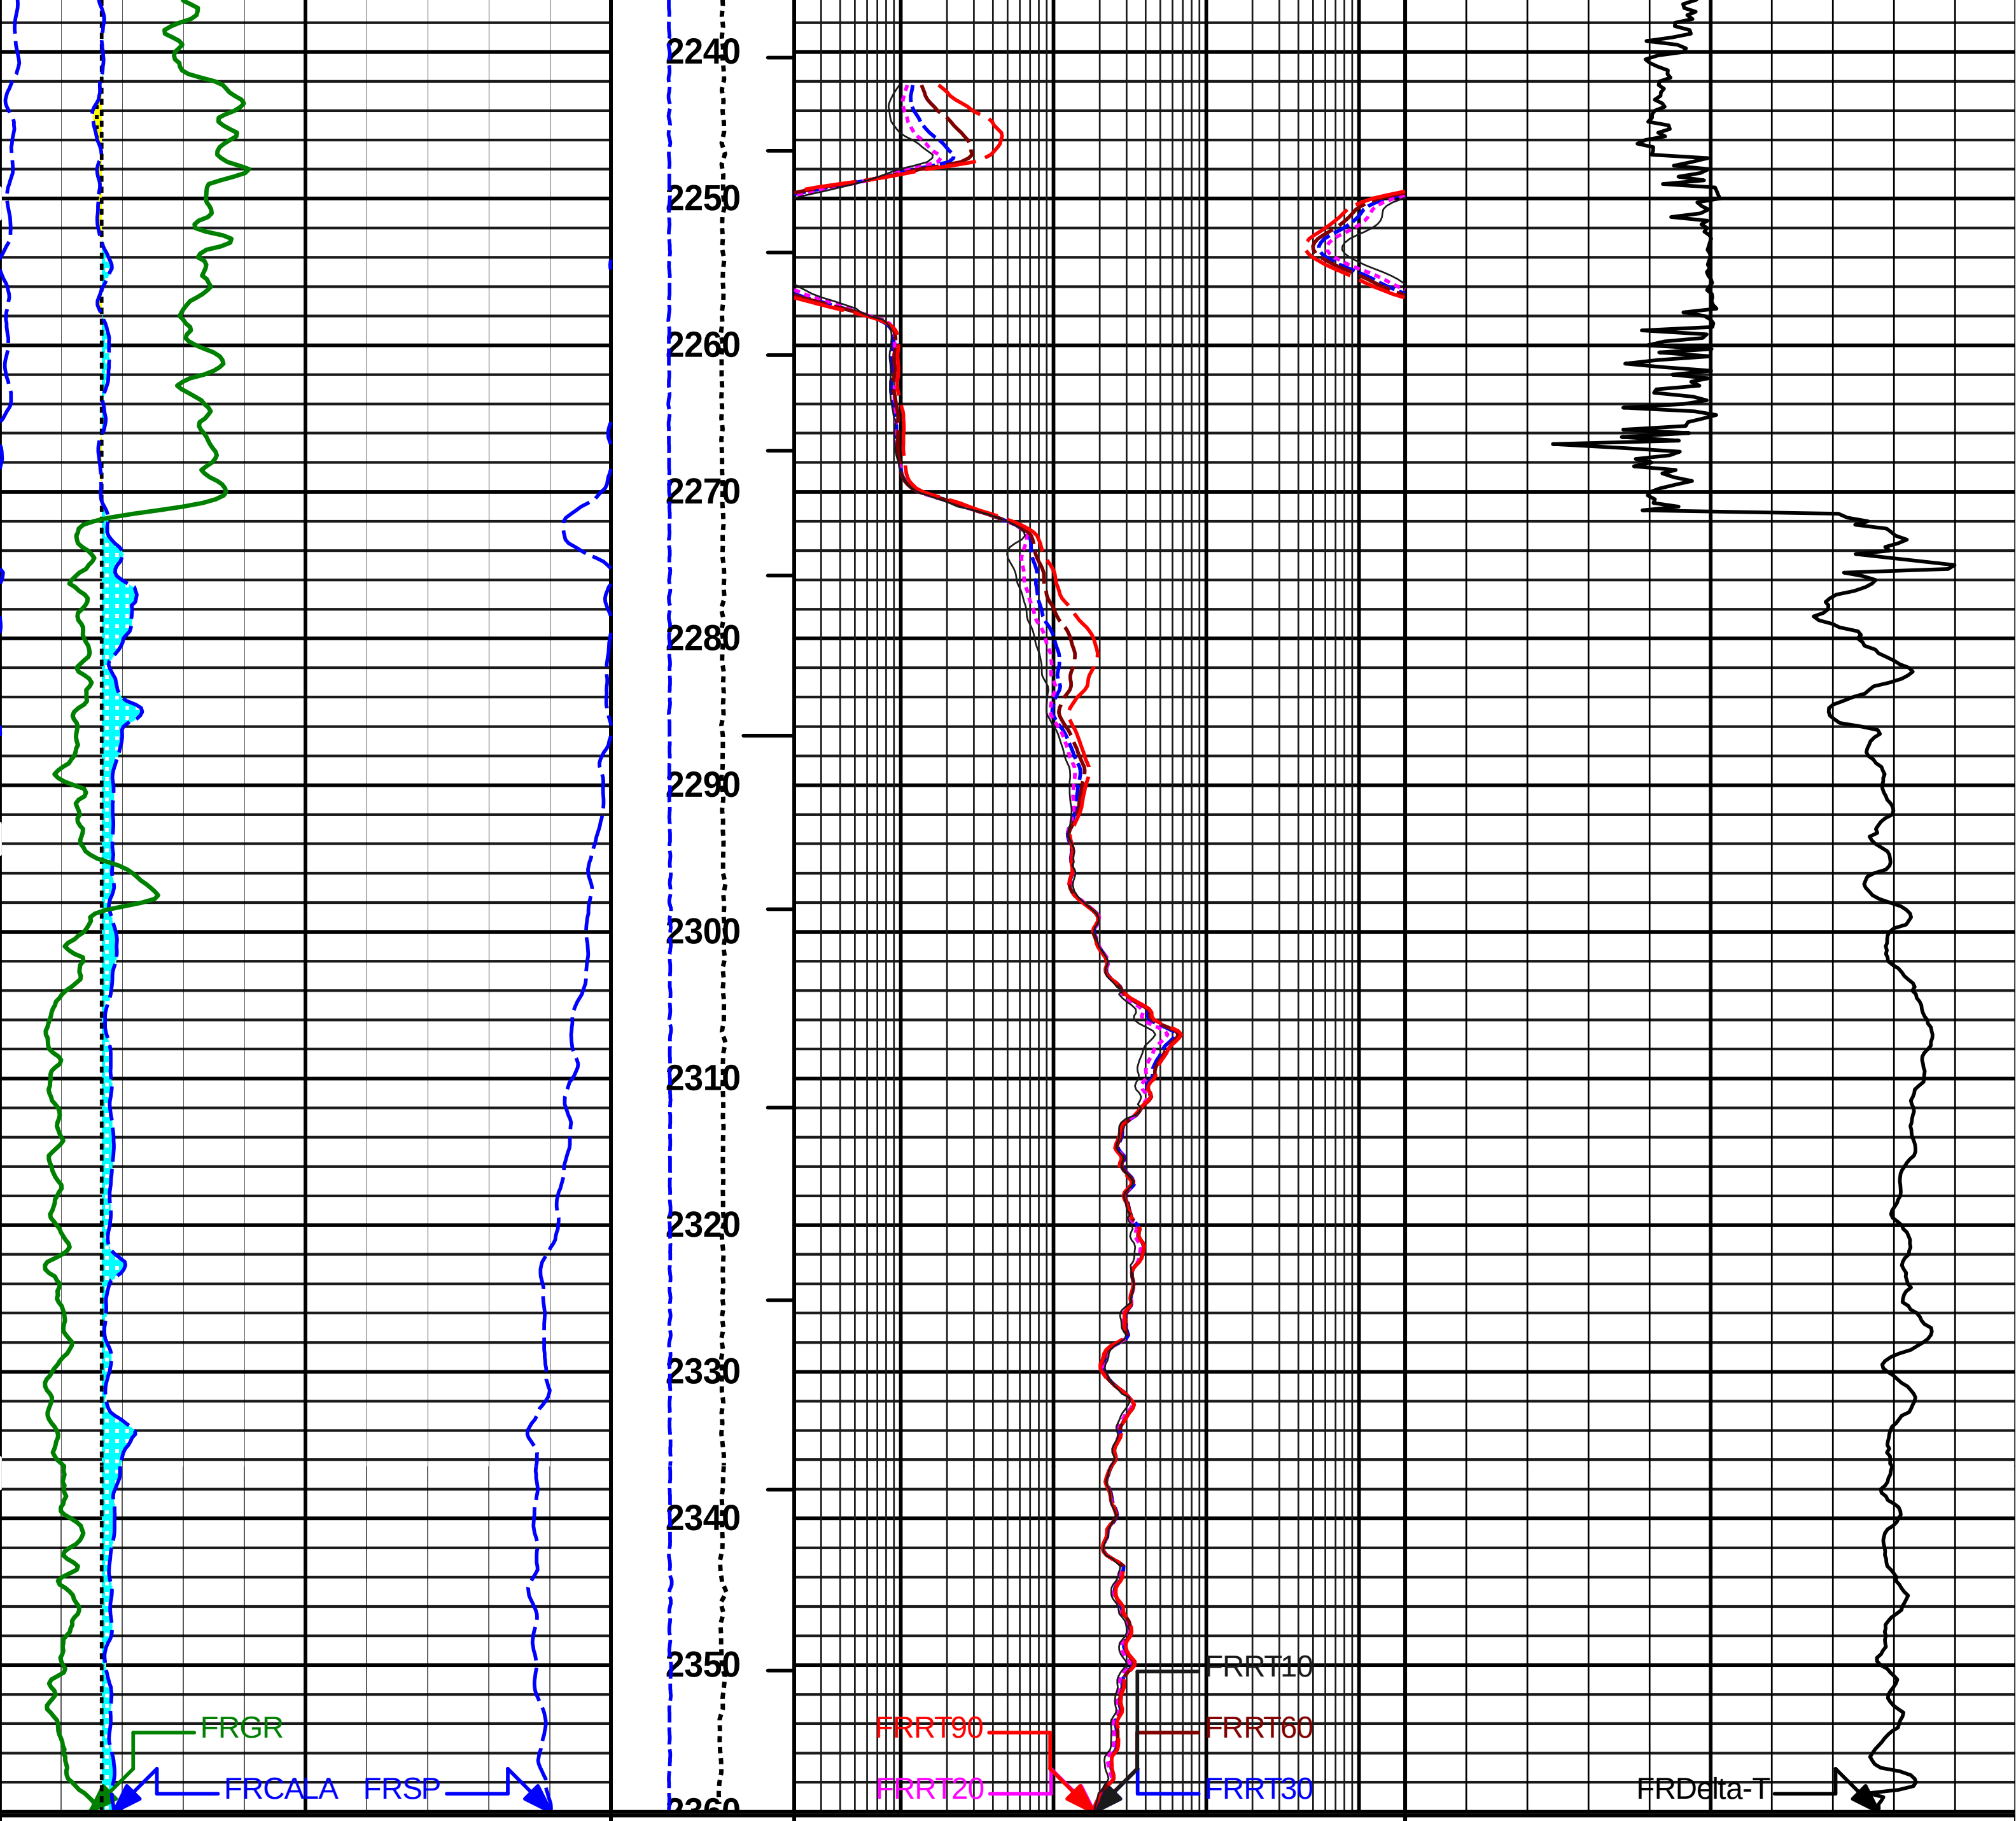

SP
mV

0 GR 150
api

15 BS 30
in

15 CALA 30
in

MUD CAKE

WASHOUT

MD
1 : 200
ft

0 Tens 6K
lbs

0 DHTN 1.5K
lbs

ITTTotal

0.2 RT10 2000
Ohm-m

0.2 RT20 2000
Ohm-m

0.2 RT30 2000
Ohm-m

0.2 RT60 2000
Ohm-m

0.2 RT90 2000
Ohm-m

240 Delta-T 40
microsec per ft

REPEAT PASS
(SCALE 1:200)

HALLIBURTON

CALIBRATION REPORT

NATURAL GAMMA RAY TOOL SHOP CALIBRATION

Tool Name: GTET - 11534459
Reference Calibration Date: 08-Aug-25 11:04:20
Engineer: ALY ALAA
Calibration Date: 27-Nov-25 16:07:00
Software Version: WL INSITE R7.2.0 (Build 1)
Calibration Version: 1

Calibrator Source Sleeve Type: Thorium
Calibrator Source S/N: 764
Calibrator API Reference:203.00 api
Equivalent Calibrator API Reference:206.6 api

Measurement	Measured	Calibrated	Units
Background	21.3	22.5	api
Background + Calibrator	216.2	229.1	api
Calibrator	195.0	206.6	api

ICT SHOP CALIBRATION

Tool Name: ICT Mandrel - 11454439
Reference Calibration Date: 10-Aug-25 10:00:59
Engineer: ALY ALAA
Calibration Date: 27-Nov-25 16:14:28
Software Version: WL INSITE R7.2.0 (Build 1)
Calibration Version: 1

CALIPERS AND RINGS			
Ring	Measured	Calibrated	Units
CALIPER 1:			
Small Ring	3.55	3.65	in
Medium Ring	7.84	8.00	in
Large Ring	14.70	15.00	in
X-Large Ring	20.85	21.00	in
CALIPER 2:			
Small Ring	3.57	3.65	in
Medium Ring	7.98	8.00	in
Large Ring	14.85	15.00	in
X-Large Ring	20.97	21.00	in
CALIPER 3:			
Small Ring	3.65	3.65	in
Medium Ring	8.13	8.00	in
Large Ring	15.07	15.00	in
X-Large Ring	21.05	21.00	in
CALIPER 4:			
Small Ring	3.68	3.65	in
Medium Ring	8.15	8.00	in
Large Ring	15.31	15.00	in

X-Large Ring	21.18	21.00	in
CALIPER 5:			
Small Ring	3.71	3.65	in
Medium Ring	8.10	8.00	in
Large Ring	15.21	15.00	in
X-Large Ring	21.07	21.00	in
CALIPER 6:			
Small Ring	3.65	3.65	in
Medium Ring	7.97	8.00	in
Large Ring	14.97	15.00	in
X-Large Ring	20.98	21.00	in

ARRAY COMPENSATED TRUE RESISTIVITY SHOP CALIBRATION

Tool Name: ACRt Sonde - 11445470
Reference Calibration Date: 27-Nov-25 15:38:42
Engineer: ALY ALAA
Calibration Date: 27-Nov-25 16:45:38
Software Version: WL INSITE R6.8.20 (Build 3)
Calibration Version: 1
Host Tool Name: ACRt Instrument - 11454449

TYPICAL GAIN RANGE

Subarray	R12KHz			R36KHz			R72KHz		
	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper
A1 (80")	0.95	1.0225	1.05	0.95	1.0265	1.05	0.95	1.0254	1.05
A2 (50")	0.95	1.0082	1.05	0.95	1.0153	1.05	0.95	1.0155	1.05
A3 (29")	0.95	1.0100	1.05	0.95	1.0141	1.05	0.95	1.0127	1.05
A4 (17")	0.95	1.0021	1.05	0.95	1.0038	1.05	0.95	1.0036	1.05
A5 (10")	N/A	N/A	N/A	0.95	0.9931	1.05	0.95	0.9917	1.05
A6 (6")	N/A	N/A	N/A	0.95	0.9841	1.05	0.95	0.9829	1.05

SONDE OFFSET

Subarray	R12KHz	R36KHz	R72KHz
	(mmho/m)	(mmho/m)	(mmho/m)
A1 (80")	-1.454	-4.515	-5.415
A2 (50")	-4.827	-5.357	-4.378
A3 (29")	-16.149	-5.195	-3.128
A4 (17")	-97.858	-31.941	-25.258
A5 (10")	N/A	-86.147	-40.898
A6 (6")	N/A	320.393	165.498

TRANSMITTER CURRENT GAIN

Signal	Lower	R	Upper
12K	0.6	0.98	1.3
36K	1.0	1.94	2.0
72K	1.0	1.24	2.0

R-MUD VERIFICATION

Signal	Lower (ohm-m)	Measured (ohm-m)	Upper (ohm-m)
Mud Cell	0.95	1.00	1.05

PASS/FAIL SUMMARY

GAIN RANGE CHK	PASS
SONDE OFFSET CHK	PASS

TOOL OK TO LOG

CALIBRATION SUMMARY

Sensor	Shop	Field	Post	Difference	Tolerance	Units

GTET-11534459						
Gamma Ray Calibrator	206.6	-----------	-----------	0.0	+/- 9.00	api
ICT Mandrel-11454439						
Caliper 1	8.00	-----------	-----------	0.00	-----------	in
Caliper 2	8.00	-----------	-----------	0.00	-----------	in
Caliper 3	8.00	-----------	-----------	0.00	-----------	in
Caliper 4	8.00	-----------	-----------	0.00	-----------	in
Caliper 5	8.00	-----------	-----------	0.00	-----------	in
Caliper 6	8.00	-----------	-----------	0.00	-----------	in
ACRt Sonde-11445470						
Mud Cell	1.00	-----------	-----------	0	-----------	ohm-m

Data: 345-6 OH\0001 SIRT_ACRt-ICT-BSAT-GR_17-5OH\IDLE **Date: 05-Dec-25 04:37:05**

HALLIBURTON

INPUTS, DELAYS AND FILTERS TABLE

Mnemonic	Input Description	Delay (ft)	Depth Filter Type	Depth Filter Length (ft)	Time Filter Type	Time Filter Length (sec)
Depth Panel						
TENS	Tension	0.00	NO		NO	
RWCH						
DHTN	DownholeTension	0.00	BLK	0.000	NO	
GTET						
TPUL	Tension Pull	56.85	NO		NO	
GR	Natural Gamma Ray API	56.85	TRI	1.750	NO	
GRU	Unfiltered Natural Gamma Ray API	56.85	NO		NO	
EGR	Natural Gamma Ray API with Enhanced Vertical Resolution	56.85	W	1.416 , 0.750	NO	
HDIA	Nominal Hole Diameter	0.00	NO		NO	
ACCZ	Accelerometer Z	0.00	BLK	0.083	NO	
DEVI	Inclination	0.00	NO		NO	
BSAT						
TPUL	Tension Pull	45.87	NO		NO	
STAT	Status	45.87	NO		NO	
DLYT	Delay Time	45.87	NO		NO	
SI	Sample Interval	45.87	NO		NO	
TXRX	Raw Telemetry 10 Receivers	45.87	NO		NO	
FRMC	Tool Frame Count	45.87	NO		NO	
GMOD	Gain processing mode	38.62	NO		NO	
ICT Mandrel						
TPUL	Tension Pull	22.62	NO		NO	
	Arm Potentiometer excitation V	19.83	NO		NO	
	Caliper 1 measurement	22.62	BLK	1.250	NO	
	Caliper 2 measurement	22.62	BLK	1.250	NO	
	Caliper 3 measurement	22.62	BLK	1.250	NO	
	Caliper 4 measurement	22.62	BLK	1.250	NO	
	Caliper 5 measurement	22.62	BLK	1.250	NO	
	Caliper 6 measurement	22.62	BLK	1.250	NO	
	Caliper Global measurement	22.62	BLK	1.250	NO	
MOTI	Motor Current	19.83	NO		NO	
MOT1	Motor Voltage 1	19.83	NO		NO	
STA1	Status word #1	19.83	NO		NO	

STA2	Status word #2	19.83	NO		NO
PRES	Caliper percentage of total compression of the spring	19.83	NO		NO
HAZI	Hole Azimuth	22.62	NO		NO
RB	Relative Bearing	22.62	NO		NO
AZI1	PAD1 Azimuth	22.62	NO		NO
DEVI	Inclination	22.62	NO		NO

	ACRt Sonde				
TPUL	Tension Pull	2.97	NO		NO
F1R1	ACRT 12KHz - 80in R value	9.22	BLK	0.000	NO
F1X1	ACRT 12KHz - 80in X value	9.22	BLK	0.000	NO
F1R2	ACRT 12KHz - 50in R value	6.72	BLK	0.000	NO
F1X2	ACRT 12KHz - 50in X value	6.72	BLK	0.000	NO
F1R3	ACRT 12KHz - 29in R value	5.22	BLK	0.000	NO
F1X3	ACRT 12KHz - 29in X value	5.22	BLK	0.000	NO
F1R4	ACRT 12KHz - 17in R value	4.22	BLK	0.000	NO
F1X4	ACRT 12KHz - 17in X value	4.22	BLK	0.000	NO
F1R5	ACRT 12KHz - 10in R value	3.72	BLK	0.000	NO
F1X5	ACRT 12KHz - 10in X value	3.72	BLK	0.000	NO
F1R6	ACRT 12KHz - 6in R value	3.47	BLK	0.000	NO
F1X6	ACRT 12KHz - 6in X value	3.47	BLK	0.000	NO
F2R1	ACRT 36KHz - 80in R value	9.22	BLK	0.000	NO
F2X1	ACRT 36KHz - 80in X value	9.22	BLK	0.000	NO
F2R2	ACRT 36KHz - 50in R value	6.72	BLK	0.000	NO
F2X2	ACRT 36KHz - 50in X value	6.72	BLK	0.000	NO
F2R3	ACRT 36KHz - 29in R value	5.22	BLK	0.000	NO
F2X3	ACRT 36KHz - 29in X value	5.22	BLK	0.000	NO
F2R4	ACRT 36KHz - 17in R value	4.22	BLK	0.000	NO
F2X4	ACRT 36KHz - 17in X value	4.22	BLK	0.000	NO
F2R5	ACRT 36KHz - 10in R value	3.72	BLK	0.000	NO
F2X5	ACRT 36KHz - 10in X value	3.72	BLK	0.000	NO
F2R6	ACRT 36KHz - 6in R value	3.47	BLK	0.000	NO
F2X6	ACRT 36KHz - 6in X value	3.47	BLK	0.000	NO
F3R1	ACRT 72KHz - 80in R value	9.22	BLK	0.000	NO
F3X1	ACRT 72KHz - 80in X value	9.22	BLK	0.000	NO
F3R2	ACRT 72KHz - 50in R value	6.72	BLK	0.000	NO
F3X2	ACRT 72KHz - 50in X value	6.72	BLK	0.000	NO
F3R3	ACRT 72KHz - 29in R value	5.22	BLK	0.000	NO
F3X3	ACRT 72KHz - 29in X value	5.22	BLK	0.000	NO
F3R4	ACRT 72KHz - 17in R value	4.22	BLK	0.000	NO
F3X4	ACRT 72KHz - 17in X value	4.22	BLK	0.000	NO
F3R5	ACRT 72KHz - 10in R value	3.72	BLK	0.000	NO
F3X5	ACRT 72KHz - 10in X value	3.72	BLK	0.000	NO
F3R6	ACRT 72KHz - 6in R value	3.47	BLK	0.000	NO
F3X6	ACRT 72KHz - 6in X value	3.47	BLK	0.000	NO
RMUD	Mud Resistivity	12.76	BLK	0.000	NO
F1RT	Transmitter Reference 12 KHz Real Signal	2.97	BLK	0.000	NO
F1XT	Transmitter Reference 12 KHz Imaginary Signal	2.97	BLK	0.000	NO
F2RT	Transmitter Reference 36 KHz Real Signal	2.97	BLK	0.000	NO
F2XT	Transmitter Reference 36 KHz Imaginary Signal	2.97	BLK	0.000	NO
F3RT	Transmitter Reference 72 KHz Real Signal	2.97	BLK	0.000	NO
F3XT	Transmitter Reference 72 KHz Imaginary Signal	2.97	BLK	0.000	NO
TFPU	Upper Feedpipe Temperature Calculated	2.97	BLK	0.000	NO
TFPL	Lower Feedpipe Temperature Calculated	2.97	BLK	0.000	NO
ITMP	Instrument Temperature	2.97	BLK	0.000	NO

TCVA	Temperature Correction Values Loop Off	2.97	NO		NO
TIDV	Instrument Temperature Derivative	2.97	NO		NO
TUDV	Upper Temperature Derivative	2.97	NO		NO
TLDV	Lower Temperature Derivative	2.97	NO		NO
TRBD	Receiver Board Temperature	2.97	NO		NO
HDIA	Nominal Hole Diameter	0.00	NO		NO
	SP Ring				
PLTC	Plot Control Mask	1.86	NO		NO
SP	Spontaneous Potential	1.86	BLK	1.250	NO
SPR	Raw Spontaneous Potential	1.86	NO		NO
SPO	Spontaneous Potential Offset	1.86	NO		NO

Data: 345-6 OH\0001 SIRT_ACRt-ICT-BSAT-GR_17-5OH\IDLE **Date: 05-Dec-25 04:42:29**

HALLIBURTON

OUTPUTS TABLE

Mnemonic	Output Description	Filter Length (ft)	Filter Type
	Depth Panel		
TPUL	Tension Pull		NO
TENS	Tension		NO
TSW	Tool String Weight		NO
LSPD	Line Speed		NO
BS	Bit Size		NO
MINM	Minute Mark Flag		NO
MGMK	Magnetic Mark Flag		NO
NCOD	Nominal Casing Outer Diameter		NO
ICV	Instrument Cable Voltage		NO
ICA	Instrument Cable Current		NO
ACV	Auxiliary Set Voltage		NO
TNSR	Tension Cal Raw Value		NO
WL1V	Wire Line 1 Voltage		NO
WL2V	Wire Line 2 Voltage		NO
WL3V	Wire Line 3 Voltage		NO
WL4V	Wire Line 4 Voltage		NO
WL5V	Wire Line 5 Voltage		NO
WL6V	Wire Line 6 Voltage		NO
WL1C	Wire Line 1 Current		NO
WL2C	Wire Line 2 Current		NO
WL3C	Wire Line 3 Current		NO
WL4C	Wire Line 4 Current		NO
WL5C	Wire Line 5 Current		NO
WL6C	Wire Line 6 Current		NO
WLFC	Wire Line Fault Current		NO
PLTC	Plot Control Mask		NO
CSID	Casing Inner Diameter		NO
NCOD	Nominal Casing Outer Diameter		NO
NCT	Nominal Casing Thickness (Calculated)		NO
CID1	Casing Inner Diameter 1		NO
CS1	Casing Outer Diameter 1		NO
CTH1	Casing Thickness 1		NO
CID2	Casing Inner Diameter 2		NO
CS2	Casing Outer Diameter 2		NO
CTH2	Casing Thickness 2		NO

CTH2	Casing Thickness 2		NO
CID3	Casing Inner Diameter 3		NO
CS3	Casing Outer Diameter 3		NO
CTH3	Casing Thickness 3		NO
CID4	Casing Inner Diameter 4		NO
CS4	Casing Outer Diameter 4		NO
CTH4	Casing Thickness 4		NO
CID5	Casing Inner Diameter 5		NO
CS5	Casing Outer Diameter 5		NO
CTH5	Casing Thickness 5		NO
CID6	Casing Inner Diameter 6		NO
CS6	Casing Outer Diameter 6		NO
CTH6	Casing Thickness 6		NO
TCTH	Total Casing Thickness		NO
	RWCH		
BTMP	BoreHole Temperature	4.250	BLK
DLOD	Down Hole Load Cell Measurement		NO
DHLP	Down Hole Load Cell Positive Measurement		NO
DHLN	Down Hole Load Cell Negative Measurement		NO
DHTN	DownholeTension		NO
	GTET		
ACCZ	Accelerometer Z		NO
DEVI	Inclination		NO
BTMP	BoreHole Temperature		NO
PLTC	Plot Control Mask		NO
EGR	Natural Gamma Ray API with Enhanced Vertical Resolution		NO
EGRC	Natural Gamma Ray API with Enhanced Vertical Resolution and BHC		NO
PLTC	Plot Control Mask		NO
GR	Natural Gamma Ray API		NO
GRCO	Natural Gamma Ray API Borehole Corrected		NO
	BSAT		
PLTC	Plot Control Mask		NO
FRMC	Tool Frame Count		NO
ACTC	Active Channels		NO
DT	Sonic Delta-T		NO
QT1	Semblance Quality		NO
ITTT	Integrated Travel Time Total		NO
ITTI	Travel Time Per Depth Sample		NO
SPHI	Acoustic Porosity		NO
SPHS	Acoustic Porosity Sandstone		NO
SPHL	Acoustic Porosity Limestone		NO
SPHD	Acoustic Porosity Dolomite		NO
SPHW	Acoustic Porosity Wylie		NO
SPHA	Acoustic Porosity - Argentime		NO
SPHR	Aco Por - Raymer, Hunt, Gardner		NO
SPHH	Acoustic Porosity - Empirical HLS		NO
SEMB	Sembalance scaled 0 - 100		NO
GMOD	Gain processing mode		NO
PLTC	Plot Control Mask		NO
WF11	Waveform Transmitter 1 - Receiver 1		NO
WF12	Waveform Transmitter 1 - Receiver 2		NO
WF13	Waveform Transmitter 1 - Receiver 3		NO
WF14	Waveform Transmitter 1 - Receiver 4		NO
WF15	Waveform Transmitter 1 - Receiver 5		NO

WF15	Waveform Transmitter 1 - Receiver 5	NO
WF21	Waveform Transmitter 2 - Receiver 1	NO
WF22	Waveform Transmitter 2 - Receiver 2	NO
WF23	Waveform Transmitter 2 - Receiver 3	NO
WF24	Waveform Transmitter 2 - Receiver 4	NO
WF25	Waveform Transmitter 2 - Receiver 5	NO
PLTC	Plot Control Mask	NO
DT	Sonic Delta-T	NO
QT1	Semblance Quality	NO
ITTT	Integrated Travel Time Total	NO
ITTI	Travel Time Per Depth Sample	NO
SPHI	Acoustic Porosity	NO
	Shear Source	NO
DTS	Shear Delta-T	NO
	Semblance Quality Shear	NO
VPVS	VPVS Ratio for Porosity	NO
POIR	Poisson's Ratio	NO

	ICT Mandrel	
PLTC	Plot Control Mask	NO
CALA	Caliper Measurement	NO
DCAL	Differential Caliper	NO
C14	Four Arm Caliper arms 1 & 4	NO
C25	Four Arm Caliper arms 2 & 5	NO
C36	Four Arm Caliper arms 3 & 6	NO
BHVT	Bore Hole Volume	NO
AHVT	Annular Hole Volume	NO
BHV	Borehole Volume Increment	NO
AHV	Annular Hole Volume Increment	NO
SO1	Stand Off Arm 1	NO
SO2	Stand Off Arm 2	NO
SO3	Stand Off Arm 3	NO
SO4	Stand Off Arm 4	NO
SO5	Stand Off Arm 5	NO
SO6	Stand Off Arm 6	NO
CAL1	Caliper 1	NO
CAL2	Caliper 2	NO
CAL3	Caliper 3	NO
CAL4	Caliper 4	NO
CAL5	Caliper 5	NO
CAL6	Caliper 6	NO
DMIN	Caliper Minimum Caliper Pair	NO
DMAX	Caliper Maximum Caliper Pair	NO
PRES	Caliper percentage of total compression of the spring	NO
HDIA	Nominal Hole Diameter	NO
HAZI	Hole Azimuth	NO
RB	Relative Bearing	NO
AZI1	PAD1 Azimuth	NO
DEVI	Inclination	NO
RAD1	Radius Caliper Arm 1	NO
RAD2	Radius Caliper Arm 2	NO
RAD3	Radius Caliper Arm 3	NO
RAD4	Radius Caliper Arm 4	NO
RAD5	Radius Caliper Arm 5	NO
RAD6	Radius Caliper Arm 6	NO
RMIN	Radius Mimimum Limit	NO

RMAX	Radius Maximum Limit	NO

	ACRt Sonde	
PLTC	Plot Control Mask	NO
RO90	90in Resistivity 1ft Res	NO
RO60	60 in Radial Resistivity 1ft	NO
RO30	30 in Radial Resistivity 1ft	NO
RO20	20 in Radial Resistivity 1ft	NO
RO10	10 in Radial Resistivity 1ft	NO
RO06	6 in Radial Resistivity 1ft	NO
RT90	90 in Radial Resistivity 2ft	NO
RT60	60 in Radial Resistivity 2ft	NO
RT30	30 in Radial Resistivity 2ft	NO
RT20	20 in Radial Resistivity 2ft	NO
RT10	10 in Radial Resistivity 2ft	NO
RT06	6 in Radial Resistivity 2ft	NO
RF90	90 in Radial Resistivity 4ft	NO
RF60	60 in Radial Resistivity 4ft	NO
RF30	30 in Radial Resistivity 4ft	NO
RF20	20 in Radial Resistivity 4ft	NO
RF10	10 in Radial Resistivity 4ft	NO
RF06	6 in Radial Resistivity 4ft	NO
CO90	90 in Radial Conductivity 1ft	NO
CO60	60 in Radial Conductivity 1ft	NO
CO30	30 in Radial Conductivity 1ft	NO
CO20	20 in Radial Conductivity 1ft	NO
CO10	10 in Radial Conductivity 1ft	NO
CO6	6 in Radial Conductivity 1ft	NO
CT90	90 in Radial Conductivity 2ft	NO
CT60	60 in Radial Conductivity 2ft	NO
CT30	30 in Radial Conductivity 2ft	NO
CT20	20 in Radial Conductivity 2ft	NO
CT10	10 in Radial Conductivity 2ft	NO
CT6	6 in Radial Conductivity 2ft	NO
CF90	90 in Radial Conductivity 4ft	NO
CF60	60 in Radial Conductivity 4ft	NO
CF30	30 in Radial Conductivity 4ft	NO
CF20	20 in Radial Conductivity 4ft	NO
CF10	10 in Radial Conductivity 4ft	NO
CF6	6 in Radial Conductivity 4ft	NO
LMAN	Left Mandrel	NO
RMAN	Right Mandrel	NO
RSO	Right Standoff	NO
LSO	Left Standoff	NO
TMPF	Upper Feedpipe Temperature Calculated	NO
ECC	Tool Eccentricity	NO
CDIA	Calculated Diameter	NO
RT	Uninvaded Zone Resistivity	NO
RXO	Invaded Zone Resistivity	NO
RXRT	RXO/RT	NO
DI	Radial Depth of Invasion	NO
DIIN	Radial Depth of Inner Invasion	NO
DIOU	Radial Depth of Outer Invasion	NO
SMUD	Mud Restivity - Calculated	NO
RMUD	Mud Restivity	NO

X4PL	X4Planner=RT90/RMUD*square(0.125-caliper)	NO
BCD1	Borehole Corrections D1	NO
BCD2	Borehole Corrections D2	NO
BCD3	Borehole Corrections D3	NO
BCD4	Borehole Corrections D4	NO
BCU5	Borehole Corrections U5	NO
BCD6	Borehole Corrections D6	NO
SED1	Skin Effect Corrections D1	NO
SED2	Skin Effect Corrections D2	NO
SED3	Skin Effect Corrections D3	NO
SED4	Skin Effect Corrections D4	NO
SEU5	Skin Effect Corrections U5	NO
SED6	Skin Effect Corrections D6	NO
QBC1	BHC Quality 1	NO
QBC2	BHC Quality 2	NO
QBC3	BHC Quality 3	NO
QBC4	BHC Quality 4	NO
QBC5	BHC Quality 5	NO
QBC6	BHC Quality 6	NO
QFBC	BHC Quality Status 1	NO
QFBC	BHC Quality Status 2	NO
QFBC	BHC Quality Status 3	NO
QFBC	BHC Quality Status 4	NO
QFBC	BHC Quality Status 5	NO
QFBC	BHC Quality Status 6	NO
CALU	Caliper Used	NO
CALM	caliper measurement indicator	NO
RMGD	Rmud Gradient Calculation	NO
HRM1	Rt Resistivity MAP - One Foot	NO
HRM2	Rt Resistivity Map - Two Ft	NO
HRM4	Rt Resistivity Map - Four Ft	NO

SP Ring

PLTC	Plot Control Mask	NO
SP	Spontaneous Potential	NO
SPR	Raw Spontaneous Potential	NO
SPO	Spontaneous Potential Offset	NO

COMPANY	**SIRTE OIL COMPANY**		
WELL	**C345-H6**		
FIELD	**ZELTEN FIELD**		
COUNTRY	**LIBYA**	RIG	**LORASCO#15**

HALLIBURTON

ACRT - ICT - BSAT - GR
COMPOSITE LOG

SCALE 1:200