

Contents

Table of Contents

Contents	i
Table of Contents	i
List of Acronyms	i
List of Figures	i
Introduction	1
State of art	2
Motivations & Work Objectives	5
Contents of the thesis	5
Appendices	7
A Implementing SAFE to compute the dispersion relation of Lamb modes . . .	7
B Details on the root-finding algorithm	10
C Overview of activities and scientific works during the thesis	11
D Extended abstract in french	13

List of Acronyms

BEM Boundary Elements Method.	PML Perfectly Matched Layer.
FEM Finite Elements Method.	SAFE Semi-analytical Finite Elements.
GEP Generalized Eigenvalue Problem.	SCM Spectral Collocation Method.
MST Multiple Scattering Theory.	SRR Split-Ring Resonator.

List of Figures

I.1	Periodic cells in 1, 2 and 3D. Image taken from Ref. ²⁶	2
I.2	Example of metamaterial and metaporous structures from the literature . . .	4
I.3	Diagram presenting a general layout for the configurations that will be studied in each chapter	6
0.4	a) Dispersion relation for the Lamb modes with the root-finding results, alongside the spectral collocation and semi-analytical finite elements solutions. b) Convergence curve of the 2 methods at a given frequency $f = 4$ kHz. The multiple lines depicts the convergence of each wavenumber.	9
0.5	iteration muller	10
0.6	Description of the routine	11

Introduction

Noise is a major issue in our modern societies, ranging from everyday life inconveniences, work comfort problems to an actual pollution problem in severely affected areas. Sources of noise can be diverse; in urban environments, concerns are mostly on population and traffic noise. From industrial origins, noise can be of several consequences, causing not only risks to the workers and the neighbouring populations, but also structural hazard to installations. Generally, motorized transport is a major issue in all environments, including aircraft, public transportation, roads, commercial vessel traffic, etc.

Although sound intensity can be measured objectively, the impact of noise on individuals is in part shaped by social and cultural context. Studies show that expected behaviours norms and customs strongly influence reported annoyance¹, with comparative surveys revealing clear cross-cultural differences. More recent work has linked collectivistic cultural norms to systematically higher everyday noise exposure^{2,3}.

The European Environment Agency estimated in 2021 that 1 in 5 European resident are exposed to unhealthy levels of noise, which mostly originates from traffic noise. These noise exposures can have a strong impact on health⁴ favoring impaired circadian rhythm, oxidative stress and cardiovascular dysfunction⁵, as well as psychological consequences like anxiety and depression⁶. Moreover, anthropic noise pollution also affects biodiversity at large, causing stress, behaviour changes, and masking sensory perception⁷. Marine traffic was shown to generate stress on marine mammals and modify their behaviour by provoking area avoidance and vocalization disruption⁸.

The emergence of all these noise sources comes with the need to mitigate them up to our current capabilities. The latter is able to evolve thanks to research on noise barriers and acoustic insulation systems. Various acoustic insulation strategies have been applied throughout the ages. Dating back to 4th century BC, acoustic jars were used to improve the room acoustics in Greek and Roman theatres as well as in the Middle Ages in Western Europe in churches⁹. These resonators are thought to be capable of reducing reverberation time in buildings, covering a frequency range matching that of human spoken voice. As another example, a famous roman amphitheater was shown to have a seat row disposition able to improve intelligibility of speeches from the stage¹⁰.

Contemporary to these antique devices, porous and fibrous materials have been traditionally used to absorb sound in the last century^{11–16}. Largely used in the industry, they are efficient at frequencies starting close to the quarter wavelength resonance frequency of the layer and have been extensively analyzed in the literature^{17–21}. They can be found in natural occurrences or engineered and cover very large use cases of acoustic insulation such as industry, transport, aerospace, concert halls and many others.

State of art

Overview of Acoustic Metamaterials

In more recent years, the emergence of more complex engineered structures has disrupted the landscape of acoustic absorbers. Metamaterials are composite structures designed to exhibit physical effective properties that go beyond the capability of the sole material that composes the bulk. They can be created by a lot of various means, including engineered microstructure, a gradual evolution of the material properties, or repeating patterns or scatterers implemented in one or several directions in space and embedded in a host material as shown for various dimensions in Fig. I.1. Compared to homogeneous layers, they generally lead to more complex structures, and are able to achieve enhanced effects. Usually allowing for a tunable response, these structures offer great flexibility and open new perspectives in material design. Therefore, they have sparked interest in various disciplines, such as photonics and optics²². They can be used to design antennas and absorber for electromagnetic waves, seismic protection devices among others. In acoustic, they allow for various applications such as absorption, filtering, diffusion or cloaking.

Seminal works have been done on the study of the use of lattice arrangements or crystals and have been applied to wave control application. Photonic crystals are used to achieve the control of light and electromagnetic waves²³. Phononic crystals have been developed for the control of elastic and acoustic waves as the periodic distribution of scatterers in a solid host medium²⁴. In the case where the host medium is constituted by a fluid, these structures are called sonic crystals²⁵. These structures are often studied through their band structure (also called dispersion diagram when used to study non-periodic geometries). These diagram represents the wavenumber in a given direction against the frequency, thus informing on the evolution of the wave velocities in the structure and thus the dispersion. These aspects will be addressed in the subsequent chapter, especially regarding the background theory and the available numerical tools to compute them.

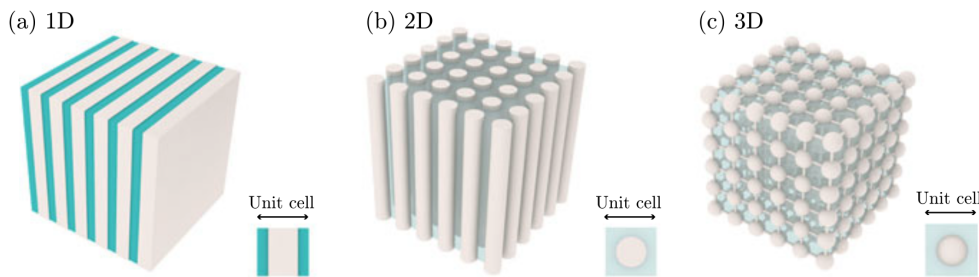


Fig. I.1: Periodic cells in 1, 2 and 3D. Image taken from Ref.²⁶

In the remaining of the literature overview, focus will be centered around metamaterials that involve mostly periodicity in only one direction. These acoustic metamaterials solutions can be divided into two main categories: the first concerns the so-called *reflection problem* where the case study is that of an incoming wave on some sample or panel which has a rigid-backing at the end. There, the consideration is focused on mitigating the reflected wave and achieving important acoustic absorption. The other case is that of a *transmission problem* where the incoming wave is able to transmit through the sample. In this case and depending on the application, either or both reflection and transmission are sought to be mitigated. The symmetry of the structure is of importance in this case.

Structured materials that tackle the reflection problem can involve many various strategies. The combination of a perforated plate and coiled-up channels is able to achieve large broadband

absorption underwater²⁷. Micro-perforated plate can also be used to achieve interesting absorption properties for airborne acoustics²⁸. Materials structured from resonant building blocks with resonance frequencies in the sub-wavelength regime i.e., for frequencies which wavelength is much bigger than the typical size of the material, have also been studied^{29–31}. Large width elastic bandgaps have been achieved using locally resonant cells in the design of a sonic crystal³². These resonances introduce strong dispersion of the waves and the properties of the system are thus dramatically affected. Together with the unavoidable losses, the resonant behaviour of metamaterials make them perfect candidates to design efficient absorbers at low frequencies with reduced dimensions^{33,34}. Balancing the dissipation and leakage of each resonance yields the recently described *critical coupling*. In this case, the reflection drops to zero³⁵. Perfect absorbers can thus be designed for reflection problems for both monochromatic waves^{33,36} and broad range of frequencies^{36–40}. This can be achieved by tuning the structure using the scattering matrix zeros plotted in the complex frequency plane; critical coupling would be achieved when the scattering matrix zero has a vanishing imaginary frequency. Similarly to these broadband absorbers, Yang *et al.* have realized the backing of a porous layer using Fabry-Pérot channels to design an efficient structure⁴¹.

One of the initial interests of the acoustic metamaterials community was the possibility of producing deeps in the transmission spectra at very low frequencies. This has been widely developed in the literature, a small subset of these works include Refs^{42–45}. These configurations are based on resonant elements and display a zero transmission in the lossless case at their resonance frequency. In reality, losses cannot be avoided and a small amount of the energy is always transmitted. Membrane-type acoustic metamaterials^{46–48}, or acoustic metamaterials made by Helmholtz resonators^{49–51} have been used to develop systems with high values of transmission loss for audible acoustics. Considering the vibroacoustic coupling allows for more precise depiction of real-life applications. Works on periodic soft inclusion in a soft solid matrix was done by Aberkane *et al.* showing improved transmission loss affected by the presence of soft inclusions in the solid layer. In this case, the presence of losses was able to improve the transmission loss at low frequencies. Also accounting for vibroacoustic coupling, attached resonators to walls have been also used to reduce the transmission loss of panels^{52,53}.

For the case of mirror-symmetric structures, it is worth noting here that if only a monopolar resonator (Helmholtz) or a dipolar resonator (membrane) is used to absorb waves, then only 50% of energy can be absorbed as shown in several articles^{54,55}. However, using a material made of slits loaded by an array of identical resonators creates an accumulation point close to the resonance frequency of the resonators allowing the accumulation of the resonances of the slit, thus placing together symmetric and antisymmetric resonances^{46,49,56}, although requiring for a compromise between absorption and thickness. A more complex approach consists in designing degenerate resonators. By using combinations of membrane and cavity resonators^{46,57} and with slits loaded with Helmholtz resonators⁵⁵, quasi-total absorption can be reached. In these systems, each resonator manages half of the problem, absorbing each one half of the energy and allowing a perfect absorption peak: all the energy that impinges on the system is dissipated within the system, i.e., the energy is neither reflected nor transmitted. The other alternative to obtain perfect absorption consists in breaking the symmetry of the system. These systems can achieve unidirectional perfect absorption, i.e., perfect absorption can be obtained from one of the two incidence sides⁵⁴. The principle of these systems consists in using two resonators, one that is used to reduce as much as possible the transmission and the other that impedance matches the system from one side^{33,36,48}. This concept has been exploited to develop broadband perfect absorbers using a cascade of the previous process giving rise to a rainbow absorber³⁷.

Metaporous layers

In order to increase the capabilities of acoustic absorption of porous materials, some works can involve the modification of the core structure of porous and poroelastic materials: tuning of the microstructure, gradient properties, anisotropic materials. Recently, with the increase of new fabrication techniques based on 3D printing, the structure of the porous materials can be controlled and tuned to design materials with better absorption capabilities at low frequencies, based on gradient properties^{58,59}, or on anisotropic materials^{60–63}. Recently, resonators filled with 3D printed porous materials have been developed to design perfect and broadband absorption⁶⁴. Other configurations have been studied, among them the periodic partitioning of the metaporous layer⁶⁵ or a labyrinthine channel embedded in a porous host⁶⁶, based on the idea of coiling up the space of the channel as was done for non-porous metamaterial designs. Recently, a hierarchical multilayer metaporous structure was proposed using an optimization procedure, giving rise to gradient and periodic designs⁶⁷.

Some studies involving porous layers embedding periodic arrays of inclusions were done during the last 15 years^{68–71}. These inclusions can have either resonances or not and they allow for an increased dissipation in the viscous regime. These structures are referred to as metaporous surfaces when used in reflection problems. The first works involving metaporous surfaces or interfaces were developed for transmission problems^{72,73}. In case of more than one inclusion per spatial period, several absorption peaks can be obtained for a particular arrangement along the porous thickness⁶⁹. Nevertheless, this rapidly leads to a thick structure. Near the inclusion resonance frequency, chosen to be in the viscous regime, an absorption peak occurs⁷⁴. The resonance frequency of the inclusions depends on the orientation of the resonators relative to the rigid boundary^{70,74}. Recently, 3D printed porous materials with embedded split-ring resonators have been modeled⁶², designed and experimentally characterized showing perfect absorption peaks. More complex spiral-shaped slits have been embedded in a porous layer and have shown to be able to maintain a high absorption for large incidence angles⁷⁵. Xiong *et al.* have studied a metaporous liner with embedded resonator and shown the existence of an exceptional point when the geometry is tuned properly, leading to enhanced absorption⁷⁶.

Previous metaporous layers studies have considered a host medium modelled as a rigid-frame porous layer; extensions of these structures to consider poroelastic materials have been done⁷⁷. Interesting properties were exhibited for thin elastic shell inclusions, and particularly in the case of a coupling between the trapped and the first volume mode leading to a high wide band absorption. While this previous study implements a semi-analytical model that makes use of Multiple Scattering Theory (MST), it is worth noting here that different modelings exist as well, based on a Finite Elements Method (FEM) and MST have been validated for the case of an air-saturated metaporoelastic configuration with a solid inclusion and rubber coatings⁷⁸. This thesis is especially focused on the computation of the dispersion relation of such configurations. Therefore, a dedicated literature review dealing with the tools available to achieve such computation will be given in Chapter ??.

figure d'illustration à faire, avec a) rainbow trapping absorber b) cavalieri split rings c) boubert 3D printed d) Weisser config e) yang li spiral scatterer

Fig. I.2: Example of metamaterial and metaporous structures from the literature

Motivations & Work Objectives

This thesis is dedicated to the numerical modeling of wave propagation in structures comprised of stacks of layers, homogeneous or with embedded scatterers. As it has been seen in the previous section, these materials combine the dissipative characteristics of porous media with the geometric or structural features typical of acoustic metamaterials, thus offering advanced control over their scattering properties. Understanding and predicting the acoustic behavior of such systems is therefore essential for designing efficient structures. In particular, this work focuses in part on the calculation of the dispersion of waves in these structures, and understand how the propagating and evanescent modes that exist in these configurations are shaping the scattering properties. Thence, the development of efficient numerical strategies is critical to this study.

The tuning of metamaterials could be achieved in some studies by looking at the zeros of the reflection coefficient in the complex frequency plane, thus highlighting the zeros of the scattering matrix. However, the wavenumber might be able to give out additional informations regarding the acoustic behaviour of metaporous layers. Band structure gives useful informations concerning sonic and phononic crystals. However, the dispersion relation of a metaporous layer embedded in an open system has never been addressed; both mechanisms of energy leakage in the surrounding media and dissipations in the porous layer should be investigated. However, this imply a heavy modification of the boundary conditions of the structure. It expected to have significant consequences on the propagation of modes therein. This work will be done on both homogeneous layers as well as periodic structures.

From these observations, we should review existing numerical methods able to compute the acoustic response of metaporous structures and consider ways to obtain a precise and robust method able to predict the scattering properties and acoustic responses of metaporous surface and interfaces. Additionnaly, we should evaluate methods that have been implemented for the computation of guided waves in layers and stacks of layers coupled to semi-infinite media. Confronting the dispersion relation, with the absorption coefficient should gelp highlighting the modal behaviour responsible for the various absorption peaks obtained by previously studied configurations and also highlight the full modes existing in the layers which might uncover additional phenomena.

Contents of the thesis

This introductory section has set the context as well as an overview of the literature in which this work is situated. We saw that acoustic metamaterials have emerged in the last decades and propose noise mitigation structures that are much more efficient that the traditional foams used for sound insulation. In particular, metaporous surfaces have shown to be promising options achieving one or multiple unitary absorption peaks at subwavelength frequency. Overall, a focus area has been identified towards identifying more precisely the modal behaviour of these configurations. Thus, in this thesis the main interest and final is to succesfully compute the dispersion relations of guided waves in such structures. The manuscript is split into four different chapters as follows,

- CHAPTER 1 introduces the fundamental concepts necessary for the good understanding of the thesis. This chapter focuses on the scattering of waves on dissipative layers and the guided waves formalism that is used for the calculation of dispersion relations. Additional bibliography is proposed on these topics as well as a summary of usable numerical methods to compute such problems.

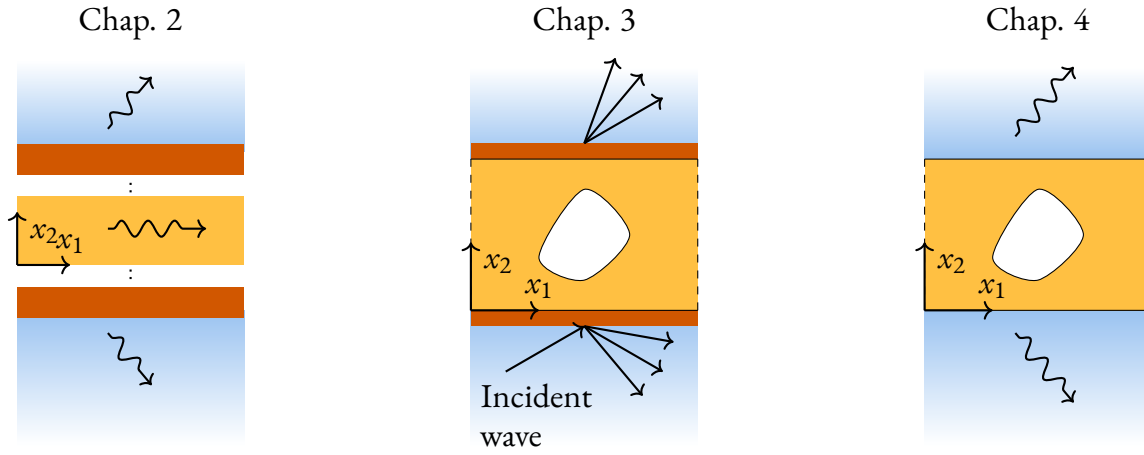


Fig. I.3: Diagram presenting a general layout for the configurations that will be studied in each chapter

- CHAPTER 2 targets the study of the propagation of guided waves in multilayer arbitrary structures with dissipative layers. A simple numerical method, the Spectral Collocation Method (SCM) is implemented and extra steps allow for the local coupling of surrounding media allows for the computation of the dispersion relation for these configurations. This chapter is constituted from paper^{P1}.
- CHAPTER 3 is focused on several numerical strategies for the modelling of scattering properties of metaporous/metaporoelastic structures. A global method is coupled to a FEM. Results focused on the performance of the proposed method, compared to other similar frameworks is proposed. The convergence of this method is shown for various metaporoelastic surfaces, which geometries were studied in previous papers. This chapter is originally an article referenced as paper. *cite this when finished*.
- In CHAPTER 4, the modal behaviour of metaporous structure is studied. The fem method from the previous chapter is adapted to describe this problem. Results are presented for the case of a rigid inclusion, as well as with embedded Split-Ring Resonator (SRR). Contents for this chapter were published in paper. *cite this when finished*.

Finally, a summary of this work is proposed along with some perspectives on this work, including early results generalizing results from chapter four to include poroelastic hosts.

Appendices

Contents

A	Implementing SAFE to compute the dispersion relation of Lamb modes . . .	7
A.1	Formalism	8
A.2	Results and convergence comparison	9
B	Details on the root-finding algorithm	10
B.1	The Müller method	10
B.2	A complete routine for the automated solving of dispersion relations .	10
C	Overview of activities and scientific works during the thesis	11
C.1	Publications	11
C.2	Conferences	11
C.3	Workshops and training schools	12
C.4	Teaching activities	12
D	Extended abstract in french	13

A Implementing SAFE to compute the dispersion relation of Lamb modes

As discussed in Section. ??, the SAFE method is an alternative to SCM for the numerical computation of dispersion relation of guided waves in layers. They rely on a similar formalism, that is a 1D discretization across the thickness of each layer and an assumption of guided harmonic waves along the longitudinal direction. An analogous method to that presented in Chapter ?? could be developed using SAFE, the key difference being the location of nodes in the layer and the interpolation function used for discretization. There is a large bibliography dealing with these topics and applying this method to similar problem to ours.

The general theory of SAFE is explained in great details in Chapter 9 of Rose's textbook⁷⁹. The present method is inspired from this material. Examples of SAFE application to dispersion curve calculation are illustrated by Ref.⁸⁰ where a numerical model was implemented to investigate periodic structure of infinite width with the addition of periodic boundary conditions allowing for the computation of guided wave modes. A similar approach was generalized for systems with arbitrary cross-sections and a coupling with infinite solid media by using the so-called absorbing region⁸¹. Other description of the surrounding medium where leakage happens have also been investigated by using a PML in Ref.⁸². This has been done by Mazzotti *et al.* using BEM^{83,84}. A local coupling of the surrounding space was done in Ref.⁸⁵ by linearizing a non-linear GEP, a similar approach to that of Refs.^{P1,86}.

In this appendix, we propose to quickly re-derive a SAFE method inspired from these previous papers to benchmark the two numerical methods regarding their respective performances. We will use high-order Lobatto function as interpolating function of the finite-elements core of the method. The system studied here is the simple of Lamb modes: an elastic layer of

infinite extent in the x_1 direction has two free edges at $x_2 = 0$ and $x_2 = h$, where a no-traction boundary condition is applied.

A.1 Formalism

Let us start with the general variational form for the elasticity equation

$$-\rho\omega^2 \int_{\Omega} u \delta u \, d\Omega + \int_{\Omega} \boldsymbol{\sigma}(u) : \boldsymbol{\varepsilon}(\delta u) \, d\Omega = \int_{\partial\Omega} \boldsymbol{\sigma}(\delta u) \cdot \mathbf{n} \, d\Gamma, \quad \forall \delta u, \quad (\text{A.1})$$

where the displacement fields is

$$\mathbf{u}(\mathbf{x}) = \mathbf{u}(x_2) e^{ik_1 x_1} e^{-i\omega t}, \quad (\text{A.2})$$

and the double-dot product is $\boldsymbol{\sigma}(u) : \boldsymbol{\varepsilon}(\delta u^*) = \sigma_{ij}(u) \varepsilon_{ij}(\delta u^*)$. $\boldsymbol{\sigma}$ designates the stress tensor while $\boldsymbol{\varepsilon}$ is the strain tensor. Developing this part of the volume term gives the expression,

$$\begin{aligned} \sigma_{11} \varepsilon_{11} &= k_1^2 (\lambda + 2\mu) u_1 \delta u_1 - ik_1 \lambda \nabla u_2 \delta u_1 \\ \sigma_{12} \varepsilon_{12} &= \frac{\mu}{2} (-ik_1 \nabla u_1 \delta u_2 + \nabla u_1 \delta \nabla u_1 + k_1^2 u_2 \delta u_2 + ik_1 u_2 \nabla \delta u_1) \\ \sigma_{22} \varepsilon_{22} &= ik_1 \lambda u_1 \nabla \delta u_2 + (\lambda + 2\mu) \nabla u_2 \nabla \delta u_2. \end{aligned} \quad (\text{A.3})$$

Putting these terms back into Eq. A.1 yields,

$$\begin{aligned} \int_{\Omega} -\rho\omega^2 (u_1 \delta u_1 + u_2 \delta u_2) + k_1^2 (\lambda + 2\mu) u_1 \delta u_1 - ik_1 \lambda \nabla u_2 \delta u_1 - ik_1 \mu \nabla u_1 \delta u_2 + \mu \nabla u_1 \delta \nabla u_1 \\ + \mu k_1^2 u_2 \delta u_2 + ik_1 \mu u_2 \nabla \delta u_1 + ik_1 \lambda u_1 \nabla \delta u_2 + (\lambda + 2\mu) \nabla u_2 \nabla \delta u_2 \, d\Omega = 0 \quad \forall \delta u \end{aligned} \quad (\text{A.4})$$

where ∇u_i denotes differentiation of the i -th component of the displacement along x_2 . Note that the surface term initially expressed vanishes from the no-traction boundary condition.

The displacement fields can be discretized as

$$\mathbf{u}(\mathbf{x}) = \mathbf{N}(\xi) \mathbf{U} e^{ik_1 x_1} e^{-i\omega t}, \quad (\text{A.5})$$

with $\mathbf{N}$ containing the Lobatto shape functions, and $\mathbf{U}$ is the vector of displacement amplitudes. Following the same discretization, the test function thus becomes $\forall \delta \mathbf{U}$. By rearranging the terms of Eq. A.4 and writing the weak form for one element,

$$\begin{aligned} \int_{\Omega_e} k_1^2 \left(\mu \delta \mathbf{U}_2^T \mathbf{M}^{(e)} \mathbf{U}_2 + (\lambda + 2\mu) \delta \mathbf{U}_1^T \mathbf{M}^{(e)} \mathbf{U}_1 \right) + ik_1 \left(\mu \delta \mathbf{U}_2^T \mathbf{C}_1^{(e)} \mathbf{U} - \mu \delta \mathbf{U}_1^T \mathbf{C}_2^{(e)} \mathbf{U}_2 \right. \\ \left. + \lambda \delta \mathbf{U}_1^T \mathbf{C}_1^{(e)} \mathbf{U}_2 - \lambda \delta \mathbf{U}_2^T \mathbf{C}_2^{(e)} \mathbf{U}_1 \right) + \mu \delta \mathbf{U}_1^T \mathbf{K}^{(e)} \mathbf{U}_1 + (\lambda + 2\mu) \delta \mathbf{U}_2^T \mathbf{K}^{(e)} \mathbf{U}_2 \\ - \rho\omega^2 \delta \mathbf{U}_1^T \mathbf{M}^{(e)} \mathbf{U}_1 - \rho\omega^2 \delta \mathbf{U}_2^T \mathbf{M}^{(e)} \mathbf{U}_2 \, d\Omega_e = 0 \end{aligned} \quad (\text{A.6})$$

where the elementary matrices are,

$$\begin{aligned} \mathbf{M}^{(e)} &= \frac{h}{2} \int_{-1}^1 \mathbf{N}^T \mathbf{N} \, d\xi, \quad \mathbf{K}^{(e)} = \frac{2}{h} \int_{-1}^1 \nabla \mathbf{N}^T \nabla \mathbf{N} \, d\xi, \\ \mathbf{C}_1^{(e)} &= \int_{-1}^1 \mathbf{N}^T \nabla \mathbf{N} \, d\xi, \quad \mathbf{C}_2^{(e)} = \int_{-1}^1 \nabla^T \mathbf{N}^T \mathbf{N} \mathbf{U} \, d\xi, \end{aligned} \quad (\text{A.7})$$

In Eq. A.6, the dependance on k_1 was highlighted and terms were sorted depending on their order. The elementary matrices should be assembled into the global matrices and then, following an analogous procedure to Chapter. ??, the general form for the problem becomes,

$$(k_1^2 \mathbf{A}_2 + ik_1 \mathbf{A}_1 + \mathbf{A}_0 - \omega^2 \mathbf{M}) \mathbf{U} = 0. \quad (\text{A.8})$$

It can easily be rewritten as a generalized eigenvalue problem,

$$\left[\begin{pmatrix} -\mathbf{A}_1 & \mathbf{A}_0 - \omega^2 \mathbf{M} \\ \mathbf{I} & \mathbf{0} \end{pmatrix} - k_1 \begin{pmatrix} \mathbf{A}_2 & \mathbf{0} \\ \mathbf{0} & \mathbf{I} \end{pmatrix} \right] \begin{pmatrix} k_1 \mathbf{U} \\ \mathbf{U} \end{pmatrix} = \mathbf{0}, \quad (\text{A.9})$$

which solving is thus quite straightforward.

A.2 Results and convergence comparison

Analytical results are obtained by applying the root-finding approach using the Müller method presented in the paper. Solutions are sought from the classical Lamb modes equations, derived in many books such as Royer. Figure 0.4a) shows the results of the three methods for a given frequency range. They all match well. In order to compare the two numerical methods in play, a brief convergence study has been done using the analytical results from the root-finding method as a reference.

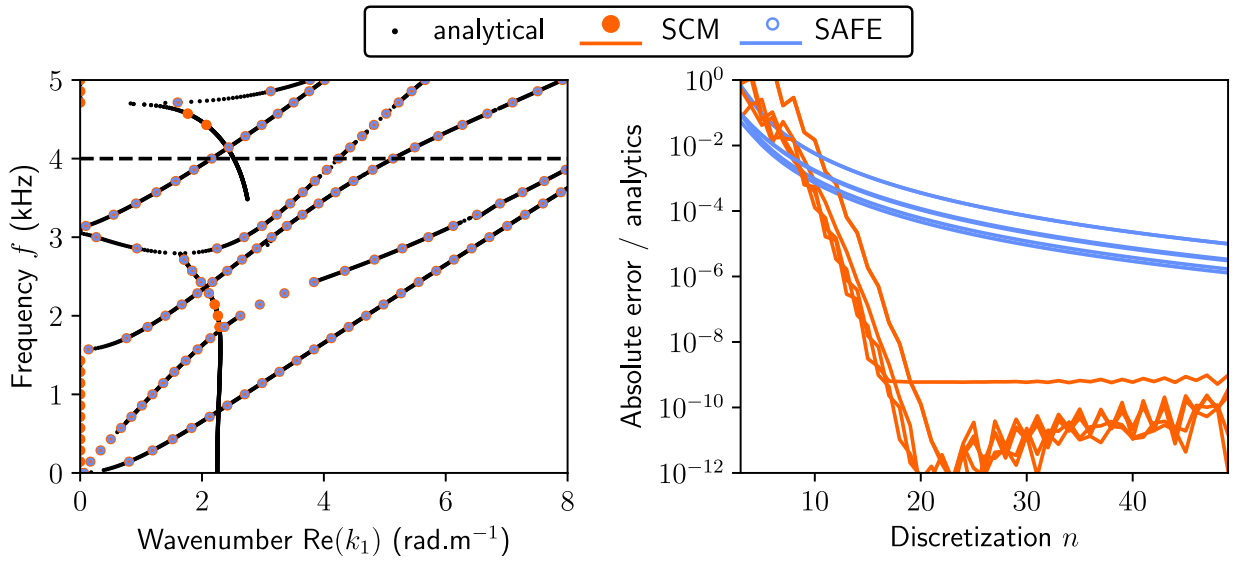


Fig. 0.4: a) Dispersion relation for the Lamb modes with the root-finding results, alongside the spectral collocation and semi-analytical finite elements solutions. b) Convergence curve of the 2 methods at a given frequency $f = 4$ kHz. The multiple lines depicts the convergence of each wavenumber.

The convergence curve of the results given in Fig. 0.4b) is unsurprisingly in agreement with the literature. It is calculated at a frequency $f = 4$ kHz: the solutions along the dashed line in Fig 0.4a) are selected. The parameter n used for the discretization is shared between the two methods and corresponds to the number of elements taken for the discretization in each method. SAFE matrices have a size $2(2n + 1)$, while SCM matrices have a size $2n$. The discretization is swept from $n = 3$ to $n = 50$.

The SCM convergence shows a steep slope and reaches a plateau around $n = 20$, while the SAFE curve follows the expected slope of a finite elements method that use second-order shape functions. When comparing at a given discretization order, the error from the SAFE is much lower than that of SCM by several orders of magnitude. In order to see comparable convergence, it would require to use higher-order shape functions or use spectral elements instead.

B Details on the root-finding algorithm

B.1 The Müller method

equations, iterative scheme etc.

87

$$\begin{aligned}\Sigma_x &= \prod_{0 \leq i < j \leq 2} (x_j - x_i) = (x_0 - x_2)(x_1 - x_2)(x_0 - x_1) \\ a &= \frac{(x_1 - x_2)(f_0 - f_2) - (x_0 - x_2)(f_1 - f_2)}{\Sigma_x} \\ b &= \frac{(x_0 - x_2)^2(f_1 - f_2) - (x_1 - x_2)^2(f_0 - f_2)}{\Sigma_x} \\ c &= f_2\end{aligned}\tag{B.1}$$

$$f(x_3) = ax_3^2 + bx_3 + c\tag{B.2}$$

$$x_3 = x_2 - \frac{2c}{b + \text{sign}(b)\sqrt{b^2 - 4ac}}\tag{B.3}$$

$$\varepsilon_a = \left| \frac{x_3 - x_2}{x_3} \right|\tag{B.4}$$

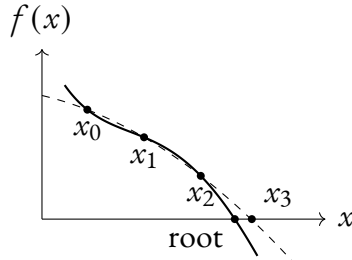


Fig. 0.5: iteration muller

B.2 A complete routine for the automated solving of dispersion relations

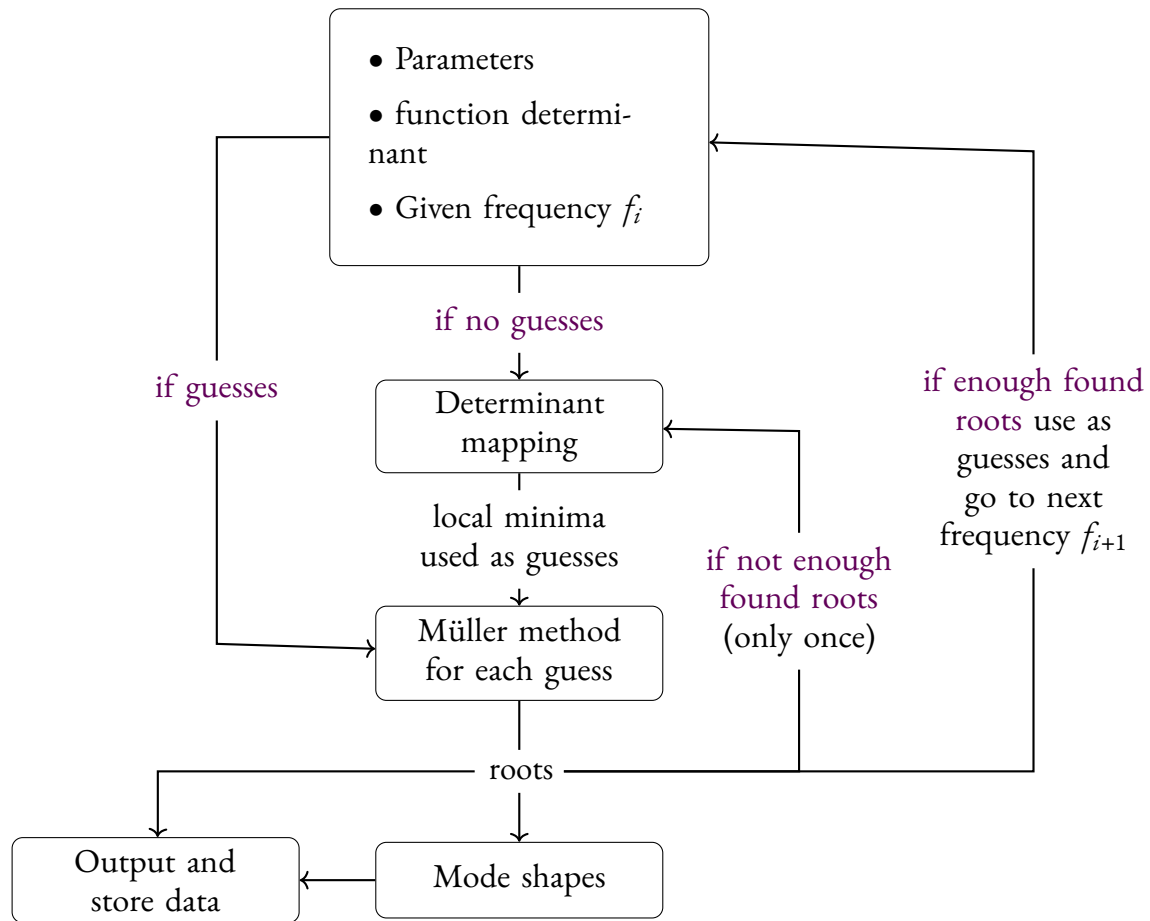


Fig. 0.6: Description of the routine

C Overview of activities and scientific works during the thesis

C.1 Publications

- P1. M. Maréchal et al. “A General Spectral Collocation Method for Computing the Dispersion Relations of Guided Acoustic Waves in Multilayer Dissipative Structures”. In: *J. App. Phys.* 137.10 (2025), p. 104902.

C.2 Conferences

(ajouter titres des présentations)

- SAM 2022 Nimes, France, October 2022 (attendee)
- JJCAB Toulouse 2023, France, July 2023 (poster)
- SAPEM Sorrento, Italy, October 2023 (presenter)
- Séminaire de 2e année Centrale Nantes, France, April 2024 (presenter)
- SAM Aegina, Greece, May 2024 (presenter)
- INTERNOISE Nantes, France, August 2024 (attendee and volunteer)
- CFA 2025 Paris, France (presenter)

C.3 Workshops and trainng schools

- training school Acoustic Metamaterials Valencia Spain, UPV, November 2023
- lamb waves workshop

C.4 Teaching activities

D Extended abstract in french

References

- [1] J. M. Fields. “Effect of Personal and Situational Variables on Noise Annoyance in Residential Areas”. In: *The Journal of the Acoustical Society of America* 93.5 (1993), pp. 2753–2763.
- [2] C. R. Benítez-Barrera et al. “Cultural Differences in Auditory Ecology”. In: *JASA Express Letters* 3.8 (2023), p. 083601.
- [3] N. Ramírez-Esparza et al. “Effects of Cultural Dynamics on Everyday Acoustic Environments”. In: *The Journal of the Acoustical Society of America* 156.3 (2024), pp. 1942–1951.
- [4] M. Basner et al. “Auditory and Non-Auditory Effects of Noise on Health”. In: *The Lancet* 383.9925 (2014), pp. 1325–1332.
- [5] T. Münzel et al. “Environmental Noise and the Cardiovascular System”. In: *Journal of the American College of Cardiology* 71.6 (2018), pp. 688–697.
- [6] O. Hahad et al. “Noise and Mental Health: Evidence, Mechanisms, and Consequences”. In: *J Expo Sci Environ Epidemiol* 35.1 (2025), pp. 16–23.
- [7] R. Sordello et al. “Evidence of the Impact of Noise Pollution on Biodiversity: A Systematic Map”. In: *Environ Evid* 9.1 (2020), p. 20.
- [8] C. Erbe et al. “The Effects of Ship Noise on Marine Mammals—A Review”. In: *Front. Mar. Sci.* 6 (2019), p. 606.
- [9] J.-C. Valière et al. “Acoustic Pots in Ancient and Medieval Buildings: Literary Analysis of Ancient Texts and Comparison with Recent Observations in French Churches”. In: *Acta Acustica united with Acustica* 99.1 (2013), pp. 70–81.
- [10] N. F. Declercq and C. S. A. Dekeyser. “Acoustic Diffraction Effects at the Hellenistic Amphitheater of Epidauros: Seat Rows Responsible for the Marvelous Acoustics”. In: *The Journal of the Acoustical Society of America* 121.4 (2007), pp. 2011–2022.
- [11] J.-F. Allard and N. Atalla. *Propagation of Sound in Porous Media: Modelling Sound Absorbing Materials*. 2nd ed. Hoboken, N.J: Wiley, 2009.
- [12] M. Bruneau. *Fundamentals of Acoustics*. London: ISTE, 2006.
- [13] J. Auriault et al. “Poromechanics II”. In: *Rotterdam, Brookfield* (2002).
- [14] P. Liu and G.-F. Chen. *Porous materials: processing and applications*. Elsevier, 2014.
- [15] T. Bourbié et al. *Acoustique des milieux poreux*. 27. éditions Technip, 1986.
- [16] O. Coussy. *Mechanics and physics of porous solids*. John Wiley & Sons, 2011.
- [17] D. Lafarge. “Propagation du son dans les matériaux poreux à structure rigide saturés par un fluide viscothermique: Définition de paramètres géométriques, analogie électromagnétique, temps de relaxation”. PhD thesis. Le Mans, 1993.
- [18] D. Lafarge et al. “Characteristic dimensions and prediction at high frequencies of the surface impedance of porous layers”. In: *The Journal of the Acoustical Society of America* 93.5 (1993), pp. 2474–2478.

- [19] D. Lafarge et al. “Dynamic Compressibility of Air in Porous Structures at Audible Frequencies”. In: *J. Acoust. Soc. Am.* 102.4 (1997), pp. 1995–2006.
- [20] A. Duclos et al. “Multiple scattering and visco-thermal effects”. In: *The Journal of the Acoustical Society of America* 120.5 (2006), pp. 3282–3282.
- [21] B. Brouard et al. “A general method of modelling sound propagation in layered media”. In: *Journal of Sound and Vibration* 183.1 (1995), pp. 129–142.
- [22] P. Russell. “Photonic Crystal Fibers”. In: *Science* 299.5605 (2003), pp. 358–362.
- [23] E. Yablonovitch. “Inhibited Spontaneous Emission in Solid-State Physics and Electronics”. In: *Phys. Rev. Lett.* 58.20 (1987), pp. 2059–2062.
- [24] M. Sigalas and E. Economou. “Elastic and Acoustic Wave Band Structure”. In: *Journal of Sound and Vibration* 158.2 (1992), pp. 377–382.
- [25] R. Martínez-Sala et al. “Sound Attenuation by Sculpture”. In: *Nature* 378.6554 (1995), pp. 241–241.
- [26] N. Jiménez et al., eds. *Acoustic Waves in Periodic Structures, Metamaterials, and Porous Media: From Fundamentals to Industrial Applications*. Vol. 143. Topics in Applied Physics. Cham: Springer International Publishing, 2021.
- [27] X. Zhou et al. “Ultrathin Acoustic Metamaterial as Super Absorber for Broadband Low-Frequency Underwater Sound”. In: *Sci Rep* 13.1 (2023), p. 7983.
- [28] I. Prasetyo et al. “Realization of a Thin and Broadband Microperforated Panel (MPP) Sound Absorber”. In: *Applied Acoustics* 183 (2021), p. 108295.
- [29] V. Romero-García and A. Hladky-Hennion. *Fundamentals and Applications of Acoustic Metamaterials: From Seismic to Radio Frequency*. ISTE Wiley, 2019.
- [30] P. A. Deymier. *Acoustic metamaterials and phononic crystals*. Vol. 173. Springer Science & Business Media, 2013.
- [31] N. Jiménez et al. “Acoustic Waves in Periodic Structures, Metamaterials, and Porous Media”. In: (2021).
- [32] Z. Liu et al. “Locally Resonant Sonic Materials”. In: ().
- [33] N. Jiménez et al. “Broadband Quasi Perfect Absorption Using Chirped Multi-Layer Porous Materials”. In: *AIP Advances* 6.12 (2016), p. 121605.
- [34] Y. Li and B. M. Assouar. “Acoustic Metasurface-Based Perfect Absorber with Deep Subwavelength Thickness”. In: *Appl. Phys. Lett.* 108.6 (2016), p. 063502.
- [35] K. Y. Bliokh et al. “Colloquium: Unusual resonators: Plasmonics, metamaterials, and random media”. In: *Reviews of Modern Physics* 80.4 (2008), p. 1201.
- [36] J.-P. Groby et al. “Use of slow sound to design perfect and broadband passive sound absorbing materials”. In: *The Journal of the Acoustical Society of America* 139.4 (2016), pp. 1660–1671.
- [37] N. Jiménez et al. “Rainbow-trapping absorbers: Broadband, perfect and asymmetric sound absorption by subwavelength panels for transmission problems”. In: *Scientific reports* 7.1 (2017), pp. 1–12.
- [38] V. Romero-Garcia et al. “Use of complex frequency plane to design broadband and sub-wavelength absorbers”. In: *The Journal of the Acoustical Society of America* 139.6 (2016), pp. 3395–3403.
- [39] V. Romero-García et al. “Perfect and broadband acoustic absorption by critically coupled sub-wavelength resonators”. In: *Sci. Rep.* 6 (2016), 19519EP.

- [40] J. Guo et al. “An Extra-Broadband Compact Sound-Absorbing Structure Composing of Double-Layer Resonator with Multiple Perforations”. In: *The Journal of the Acoustical Society of America* 150.2 (2021), pp. 1370–1380.
- [41] M. Yang and P. Sheng. “Sound Absorption Structures: From Porous Media to Acoustic Metamaterials”. In: *Annual Review of Materials Research* 47.1 (2017), pp. 83–114.
- [42] Y. Aurégan et al. “Low frequency sound attenuation in a flow duct using a thin slow sound material”. In: *The Journal of the Acoustical Society of America* 139.5 (2016), EL149–EL153.
- [43] J. Yang et al. “Slow-wave metamaterial open panels for efficient reduction of low-frequency sound transmission”. In: *Applied Physics Letters* 112.9 (2018), p. 091901.
- [44] J. Leng et al. “Limits of flexural wave absorption by open lossy resonators: reflection and transmission problems”. In: *New Journal of Physics* 21.5 (2019), p. 053003.
- [45] A. Lardeau et al. “Broadband transmission loss using the overlap of resonances in 3D sonic crystals”. In: *Crystals* 6.5 (2016), p. 51.
- [46] J. Yang et al. “Metaporous Layer to Overcome the Thickness Constraint for Broadband Sound Absorption”. In: *Journal of Applied Physics* 117.17 (2015), p. 174903.
- [47] X. Wang et al. “Acoustic perfect absorption and broadband insulation achieved by double-zero metamaterials”. In: *Applied Physics Letters* 112.2 (2018), p. 021901.
- [48] V. Romero-García et al. “Use of complex frequency plane to design broadband and sub-wavelength absorbers”. In: *The Journal of the Acoustical Society of America* 139.6 (2016), pp. 3395–3403.
- [49] V. Romero-García et al. “Perfect absorption in mirror-symmetric acoustic metascreens”. In: *Physical Review Applied* 14.5 (2020), p. 054055.
- [50] H. Long et al. “Asymmetric absorber with multiband and broadband for low-frequency sound”. In: *Applied Physics Letters* 111.14 (2017), p. 143502.
- [51] H. Long et al. “Tunable and broadband asymmetric sound absorptions with coupling of acoustic bright and dark modes”. In: *Journal of Sound and Vibration* 479 (2020), p. 115371.
- [52] M. Yang et al. “Coupled Membranes with Doubly Negative Mass Density and Bulk Modulus”. In: *Phys. Rev. Lett.* 110.13 (2013), p. 134301.
- [53] Z. Yang et al. “Membrane-Type Acoustic Metamaterial with Negative Dynamic Mass”. In: *Phys. Rev. Lett.* 101.20 (2008), p. 204301.
- [54] A. Merkel et al. “Control of acoustic absorption in one-dimensional scattering by resonant scatterers”. In: *Applied Physics Letters* 107.24 (2015), p. 244102.
- [55] N. Jiménez et al. “Quasiperfect absorption by subwavelength acoustic panels in transmission using accumulation of resonances due to slow sound”. In: *Phys. Rev. B* 95 (1 2017), p. 014205.
- [56] J. R. Piper and S. Fan. “Total absorption in a graphene monolayer in the optical regime by critical coupling with a photonic crystal guided resonance”. In: *Acs Photonics* 1.4 (2014), pp. 347–353.
- [57] C. Fu et al. “Hybrid membrane resonators for multiple frequency asymmetric absorption and reflection in large waveguide”. In: *Applied Physics Letters* 110.2 (2017), p. 021901.
- [58] J. Boulvert et al. “Optimally Graded Porous Material for Broadband Perfect Absorption of Sound”. In: *J. Appl. Phys.* 126.17 (2019), p. 175101.

- [59] J. Boulvert et al. “Acoustic modeling of micro-lattices obtained by additive manufacturing”. In: *Applied Acoustics* 164 (2020), p. 107244.
- [60] T. Cavalieri et al. “Acoustic wave propagation in effective graded fully anisotropic fluid layers”. In: *The Journal of the Acoustical Society of America* 146.5 (2019), pp. 3400–3408.
- [61] T. Cavalieri et al. “Graded and Anisotropic Porous Materials for Broadband and Angular Maximal Acoustic Absorption”. In: *Materials* 13.20 (2020), p. 4605.
- [62] T. Cavalieri et al. “Rapid Additive Manufacturing of Optimized Anisotropic Metaporous Surfaces for Broadband Absorption”. In: *J. Appl. Phys.* 129.11 (2021), p. 115102.
- [63] A. Terroir et al. “General method to retrieve all effective acoustic properties of fully-anisotropic fluid materials in three dimensional space”. In: *Journal of Applied Physics* 125.2 (2019), p. 025114.
- [64] J. Boulvert et al. “Folded metaporous material for sub-wavelength and broadband perfect sound absorption”. In: *Applied Physics Letters* 117.25 (2020), p. 251902.
- [65] J. Yang et al. “Metaporous Layer to Overcome the Thickness Constraint for Broadband Sound Absorption”. In: *Journal of Applied Physics* 117.17 (2015).
- [66] X. Liu et al. “Acoustic Labyrinthine Porous Metamaterials for Subwavelength Low-Frequency Sound Absorption”. In: *Journal of Applied Physics* 129.19 (2021), p. 195103.
- [67] S. Kuznetsova et al. “Hierarchical Metaporous Materials as Sound Absorbers”. In: *Proc. R. Soc. A*. 480.2301 (2024), p. 20230831.
- [68] J.-P. Groby et al. “Quasi-total absorption peak by use of a backed rigid frame porous layer with circular periodic inclusions embedded”. In: *arXiv preprint arXiv:1007.3177* (2010).
- [69] J.-P. Groby et al. “Enhancing the Absorption Coefficient of a Backed Rigid Frame Porous Layer by Embedding Circular Periodic Inclusions”. In: *J. Acoust. Soc. Am.* 130.6 (2011), pp. 3771–3780.
- [70] C. Lagarrigue et al. “Absorption of Sound by Porous Layers with Embedded Periodic Arrays of Resonant Inclusions”. In: *J. Acoust. Soc. Am.* 134.6 (2013), pp. 4670–4680.
- [71] J.-P. Groby et al. “Using simple shape three-dimensional rigid inclusions to enhance porous layer absorption”. In: *The Journal of the Acoustical Society of America* 136.3 (2014), pp. 1139–1148.
- [72] J.-P. Groby et al. “Acoustic response of a periodic distribution of macroscopic inclusions within a rigid frame porous plate”. In: *Waves in Random and Complex Media* 18.3 (2008), pp. 409–433.
- [73] L. De Ryck et al. “Acoustic wave propagation and internal fields in rigid frame macroscopically inhomogeneous porous media”. In: *Journal of Applied Physics* 102.2 (2007), p. 024910.
- [74] J.-P. Groby et al. “Enhancing the Absorption Properties of Acoustic Porous Plates by Periodically Embedding Helmholtz Resonators”. In: *J. Acoust. Soc. Am.* 137.1 (2015), pp. 273–280.
- [75] Y. Zhou et al. “Perfect Acoustic Absorption by Subwavelength Metaporous Composite”. In: *Applied Physics Letters* 115.9 (2019), p. 093503.
- [76] L. Xiong et al. “Sound Attenuation Optimization Using Metaporous Materials Tuned on Exceptional Points”. In: *J. Acoust. Soc. Am.* 142.4 (2017), pp. 2288–2297.
- [77] T. Weisser et al. “Acoustic Behavior of a Rigidly Backed Poroelastic Layer with Periodic Resonant Inclusions by a Multiple Scattering Approach”. In: *J. Acoust. Soc. Am.* 139.2 (2016), pp. 617–629.

- [78] M. Gaborit et al. “Coupling FEM, Bloch Waves and TMM in Meta Poroe-
lastic Laminates”. In: *Acta Acust.* 104.2
(2018), pp. 220–227.
- [79] J. L. Rose. *Ultrasonic Guided Waves in
Solid Media*. 1st ed. Cambridge Univer-
sity Press, 2014.
- [80] M. V. Predoi et al. “Wave Propagation
along Transversely Periodic Structures”.
In: *The Journal of the Acoustical Soci-
ety of America* 121.4 (2007), pp. 1935–
1944.
- [81] M. Castaings and M. Lowe. “Finite El-
ement Model for Waves Guided along
Solid Systems of Arbitrary Section Cou-
pled to Infinite Solid Media”. In: *The
Journal of the Acoustical Society of
America* 123.2 (2008), pp. 696–708.
- [82] P. Zuo and Z. Fan. “SAFE-PML Ap-
proach for Modal Study of Waveg-
uides with Arbitrary Cross Sections Im-
mersed in Inviscid Fluid”. In: *J. Sound
Vib.* 406 (2017), pp. 181–196.
- [83] M. Mazzotti et al. “A Coupled SAFE-
2.5D BEM Approach for the Disper-
sion Analysis of Damped Leaky Guided
Waves in Embedded Waveguides of Ar-
bitrary Cross-Section”. In: *Ultrasonics*
53.7 (2013), pp. 1227–1241.
- [84] M. Mazzotti et al. “Dispersion Anal-
ysis of Leaky Guided Waves in Fluid-
Loaded Waveguides of Generic Shape”.
In: *Ultrasonics* 54.1 (2014), pp. 408–
418.
- [85] T. Hayashi and D. Inoue. “Calculation
of Leaky Lamb Waves with a Semi-
Analytical Finite Element Method”. In:
Ultrasonics 54.6 (2014), pp. 1460–1469.
- [86] D. A. Kiefer et al. “Calculating the Full
Leaky Lamb Wave Spectrum with Ex-
act Fluid Interaction”. In: *J. Acoust.
Soc. Am.* 145.6 (2019), pp. 3341–3350.
- [87] S. C. Chapra and R. P. Canale. *Nu-
merical Methods for Engineers*. 6th ed.
Boston: McGraw-Hill Higher Educa-
tion, 2010.