

Cessna 172

Flight Simulation Data

Copyright © 2019 Marek M. Cel. All rights reserved.

Author: Marek M. Cel

Revision: 9

Date: 2019-12-14

This work is licensed under a

Creative Commons CC0 1.0 Universal Public Domain Dedication

Statement of Purpose

The laws of most jurisdictions throughout the world automatically confer exclusive Copyright and Related Rights (defined below) upon the creator and subsequent owner(s) (each and all, an "owner") of an original work of authorship and/or a database (each, a "Work").

Certain owners wish to permanently relinquish those rights to a Work for the purpose of contributing to a commons of creative, cultural and scientific works ("Commons") that the public can reliably and without fear of later claims of infringement build upon, modify, incorporate in other works, reuse and redistribute as freely as possible in any form whatsoever and for any purposes, including without limitation commercial purposes. These owners may contribute to the Commons to promote the ideal of a free culture and the further production of creative, cultural and scientific works, or to gain reputation or greater distribution for their Work in part through the use and efforts of others.

For these and/or other purposes and motivations, and without any expectation of additional consideration or compensation, the person associating CC0 with a Work (the "Affirmer"), to the extent that he or she is an owner of Copyright and Related Rights in the Work, voluntarily elects to apply CC0 to the Work and publicly distribute the Work under its terms, with knowledge of his or her Copyright and Related Rights in the Work and the meaning and intended legal effect of CC0 on those rights.

1. Copyright and Related Rights. A Work made available under CC0 may be protected by copyright and related or neighboring rights ("Copyright and Related Rights"). Copyright and Related Rights include, but are not limited to, the following:

- i. the right to reproduce, adapt, distribute, perform, display, communicate, and translate a Work;
- ii. moral rights retained by the original author(s) and/or performer(s);
- iii. publicity and privacy rights pertaining to a person's image or likeness depicted in a Work;
- iv. rights protecting against unfair competition in regards to a Work, subject to the limitations in paragraph 4(a), below;

- v. rights protecting the extraction, dissemination, use and reuse of data in a Work;
- vi. database rights (such as those arising under Directive 96/9/EC of the European Parliament and of the Council of 11 March 1996 on the legal protection of databases, and under any national implementation thereof, including any amended or successor version of such directive); and
- vii. other similar, equivalent or corresponding rights throughout the world based on applicable law or treaty, and any national implementations thereof.

2. Waiver. To the greatest extent permitted by, but not in contravention of, applicable law, Affirmer hereby overtly, fully, permanently, irrevocably and unconditionally waives, abandons, and surrenders all of Affirmer's Copyright and Related Rights and associated claims and causes of action, whether now known or unknown (including existing as well as future claims and causes of action), in the Work (i) in all territories worldwide, (ii) for the maximum duration provided by applicable law or treaty (including future time extensions), (iii) in any current or future medium and for any number of copies, and (iv) for any purpose whatsoever, including without limitation commercial, advertising or promotional purposes (the "Waiver"). Affirmer makes the Waiver for the benefit of each member of the public at large and to the detriment of Affirmer's heirs and successors, fully intending that such Waiver shall not be subject to revocation, rescission, cancellation, termination, or any other legal or equitable action to disrupt the quiet enjoyment of the Work by the public as contemplated by Affirmer's express Statement of Purpose.





3. Public License Fallback. Should any part of the Waiver for any reason be judged legally invalid or ineffective under applicable law, then the Waiver shall be preserved to the maximum extent permitted taking into account Affirmer's express Statement of Purpose. In addition, to the extent the Waiver is so judged Affirmer hereby grants to each affected person a royalty-free, non transferable, non sublicensable, non exclusive, irrevocable and unconditional license to exercise Affirmer's Copyright and Related Rights in the Work (i) in all territories worldwide, (ii) for the maximum duration provided by applicable law or treaty (including future time extensions), (iii) in any current or future medium and for any number of copies, and (iv) for any purpose whatsoever, including without limitation commercial, advertising or promotional purposes (the "License"). The License shall be deemed effective as of the date CC0 was applied by Affirmer to the Work. Should any part of the License for any reason be judged legally invalid or ineffective under applicable law, such partial invalidity or ineffectiveness shall not invalidate the remainder of the License, and in such case Affirmer hereby affirms that he or she will not (i) exercise any of his or her remaining Copyright and Related Rights in the Work or (ii) assert any associated claims and causes of action with respect to the Work, in either case contrary to Affirmer's express Statement of Purpose.

4. Limitations and Disclaimers.

- a. No trademark or patent rights held by Affirmer are waived, abandoned, surrendered, licensed or otherwise affected by this document.
- b. Affirmer offers the Work as-is and makes no representations or warranties of any kind concerning the Work, express, implied, statutory or otherwise, including without limitation warranties of title, merchantability, fitness for a particular purpose, non infringement, or the absence of latent or other defects, accuracy, or the present or absence of errors, whether or not discoverable, all to the greatest extent permissible under applicable law.
- c. Affirmer disclaims responsibility for clearing rights of other persons that may apply to the Work or any use thereof, including without limitation any person's Copyright and Related Rights in the Work. Further, Affirmer disclaims responsibility for obtaining any necessary consents, permissions or other rights required for any use of the Work.
- d. Affirmer understands and acknowledges that Creative Commons is not a party to this document and has no duty or obligation with respect to this CC0 or use of the Work.

Table of Contents

1. General Data.....	7
2. Performance.....	9
3. Aerodynamic Characteristics.....	10
3.1. Aerodynamic Characteristics – Basic Configuration.....	16
3.2. Aerodynamic Characteristics – Tail-Off Configuration.....	18
3.3. Aerodynamic Characteristics – 30-degree Flaps.....	20
4. Mass Data.....	22
Bibliography.....	24

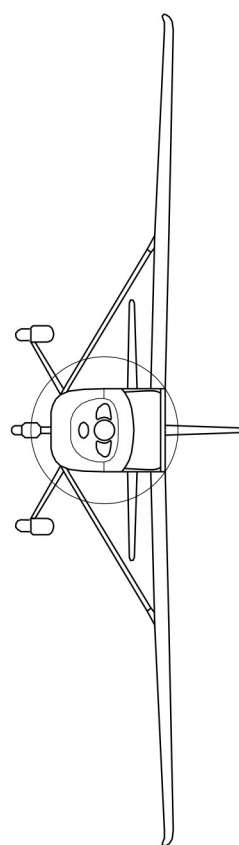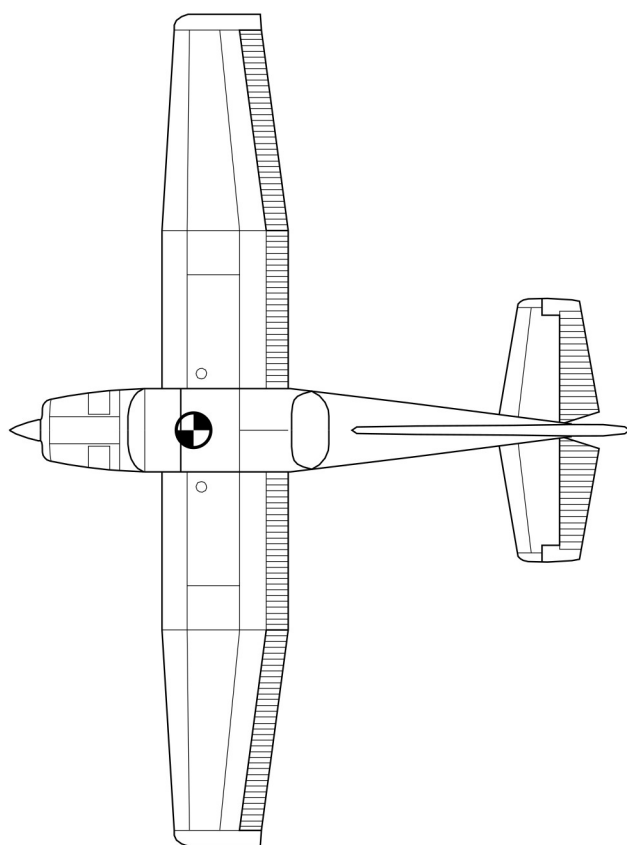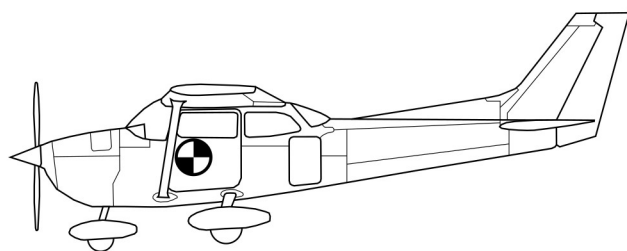

1. General Data

Parameter	Value	Reference
Length	8.28 m	[1], [2]
Wingspan	11.00 m	[1], [2]
Height	2.72 m	[1], [2]
Wheelbase	1.63 m	[2]
Wheel track	2.53 m	[2]
Wing area	16.17 m ²	[1], [2]
Mean aerodynamic chord	1.49 m	[1]
Wing airfoil	NACA 2412	[2]
Horizontal tail area	2.00 m ²	[2]
Horizontal tail airfoil at root (Cessna 177)	NACA 0012	[3]
Horizontal tail airfoil at tip (Cessna 177)	NACA 0009	[3]
Vertical tail area	1.04 m ²	[2]
Vertical tail airfoil at root	NACA 0009	[4]
Vertical tail airfoil at tip	NACA 0006	[4]
Ailerons deflection limit	up 20°, down 15°	[5]
Ailerons area (total)	1.70 m ²	[2]
Elevator deflection limit	up 28°, down 23°	[5]
Elevator area (including trim tab)	1.35 m ²	[2]
Elevator trim tab deflection limit	up 22°, down 19°	[5]
Rudder deflection limit	±17.7°	[5]
Flaps area	1.98 m ²	[2]
Flaps deflection limit	30°	[5]
Standard empty weight	754 kg	[1]
Total fuel tanks capacity	212 l	[1], [5]
Downwash angle derivative with respect to the aircraft angle of attack	0.25	[6]
Engine manufacturer	Textron Lycoming	[1]
Engine model	IO-360-L2A	[1]
Engine rated power (at 2 700 RPM)	134.2 kW	[1], [7]
Engine displacement	5.9 l	[1]
Engine height	0.631 m	[7]

Cessna 172 - Flight Simulation Data


Parameter	Value	Reference
Engine width	0.848 m	[7]
Engine length	0.757 m	[7]
Engine standard dry weight	126.1 kg	[7]
Specific fuel consumption (at 2 200 RPM)	253.4 g/(kW·h)	[7]
Propeller manufacturer	McCauley	[1]
Propeller model	1A170E/JHA7660	[1]
Number of blades	2	[1]
Propeller diameter	1.93 m	[1]

2. Performance


Parameter	Value	Reference
Maximum take-off weight (normal)	1 157 kg	[1]
Maximum take-off weight (utility)	998 kg	[1]
Maximum weight in baggage compartments	54 kg	[1], [5]
Stall speed (at 1,157 kg weight, 0° flaps)	53 kts	[1]
Cruise speed (at 75% power, at FL80)	124 kts	[1]
Maximum level speed (at SL)	123 kts	[2]
Never exceed speed	160 kts	[1]
Maximum rate of climb (at SL)	720 ft/min	[2]
Service ceiling	13 500 ft	[2]
Take-off run	288 m	[2]
Take-off to 15 m	514 m	[2]
Landing from 15 m	395 m	[2]
Landing run	168 m	[2]
Range with max fuel (45 min reserves, at 80% power, at FL80)	580 nmi	[2]
Range with max fuel (45 min reserves, at 60% power, at FL100)	687 nmi	[2]
Endurance	6 h 36 min	[2]

3. Aerodynamic Characteristics


OpenFOAM simpleFoam a steady-state solver for incompressible, turbulent flow was used to compute aircraft aerodynamic characteristics for the full range of angle of attack and various aircraft configurations.

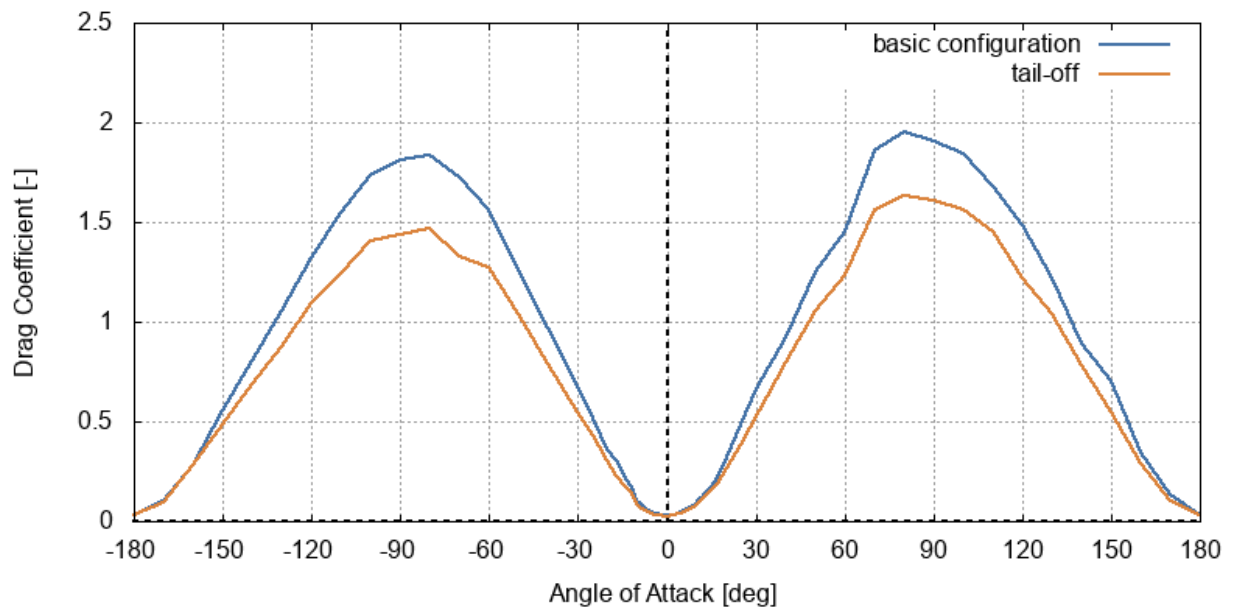

Drag coefficient

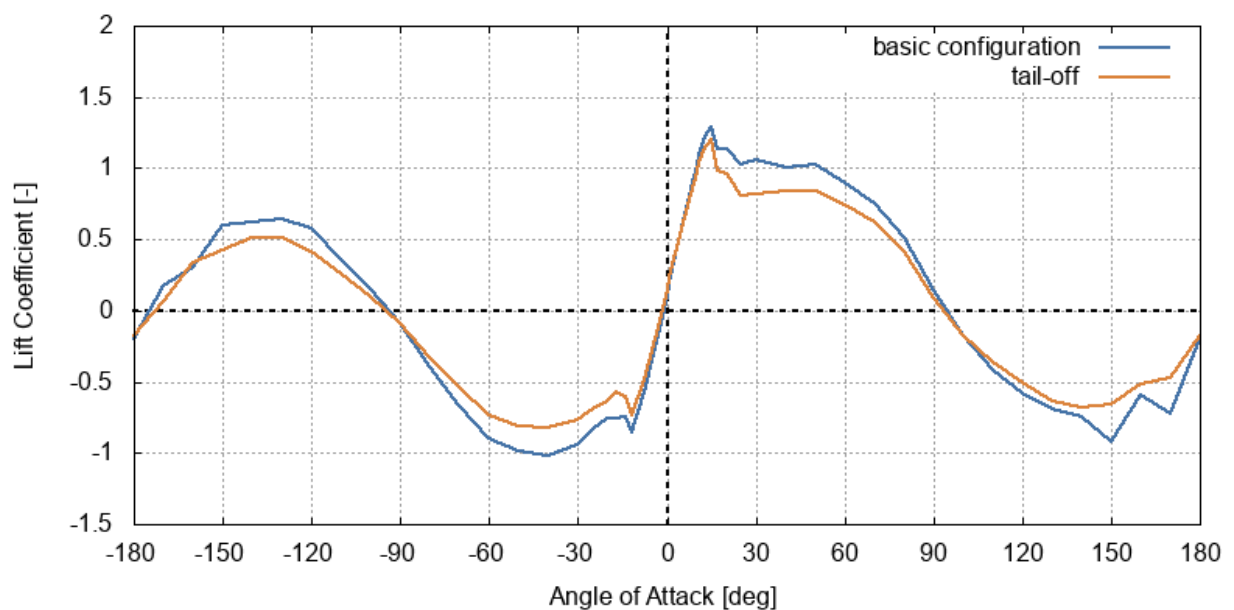


Lift coefficient

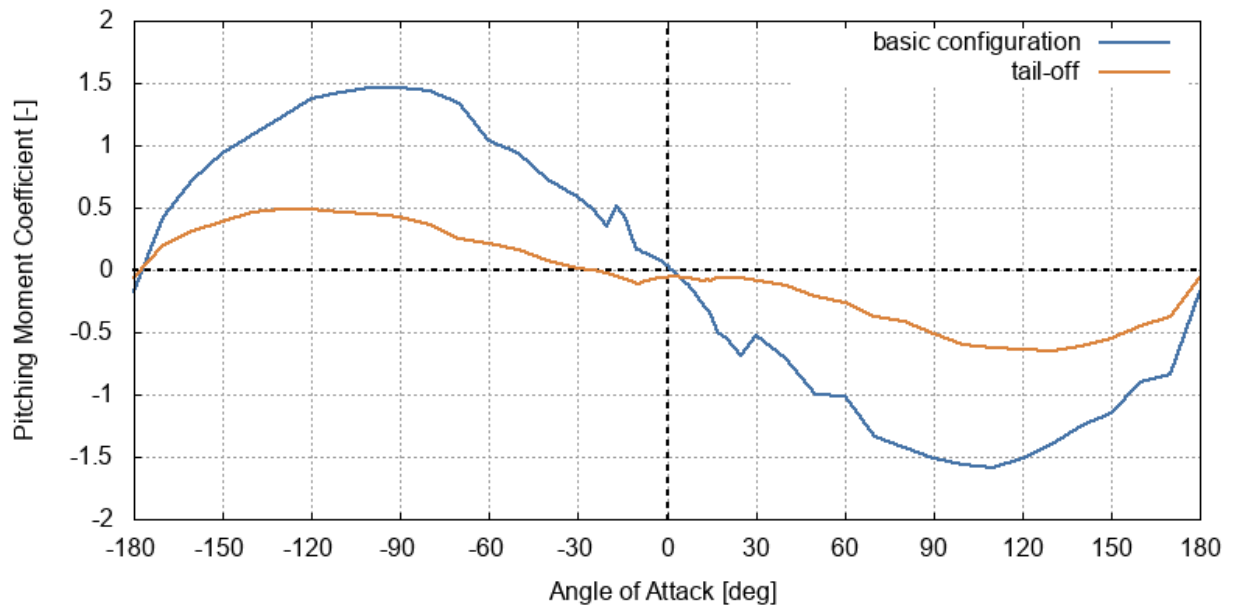


Pitching moment coefficient


Results for basic and landing configurations (30-degree flaps deflection) are shown in the following figures.

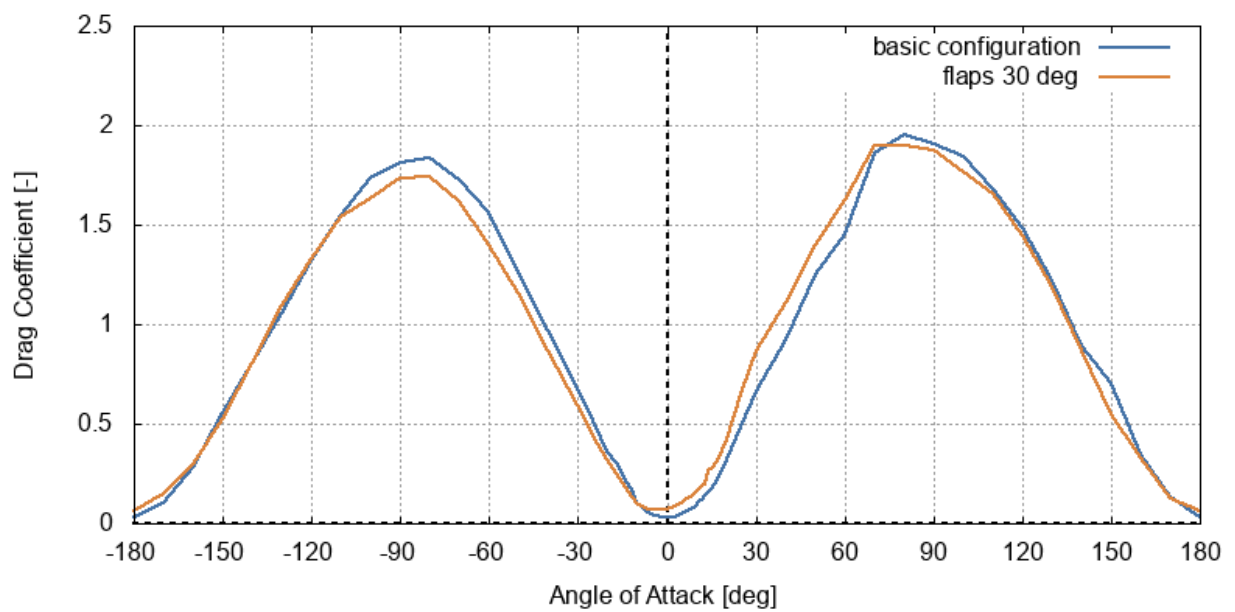

Drag coefficient

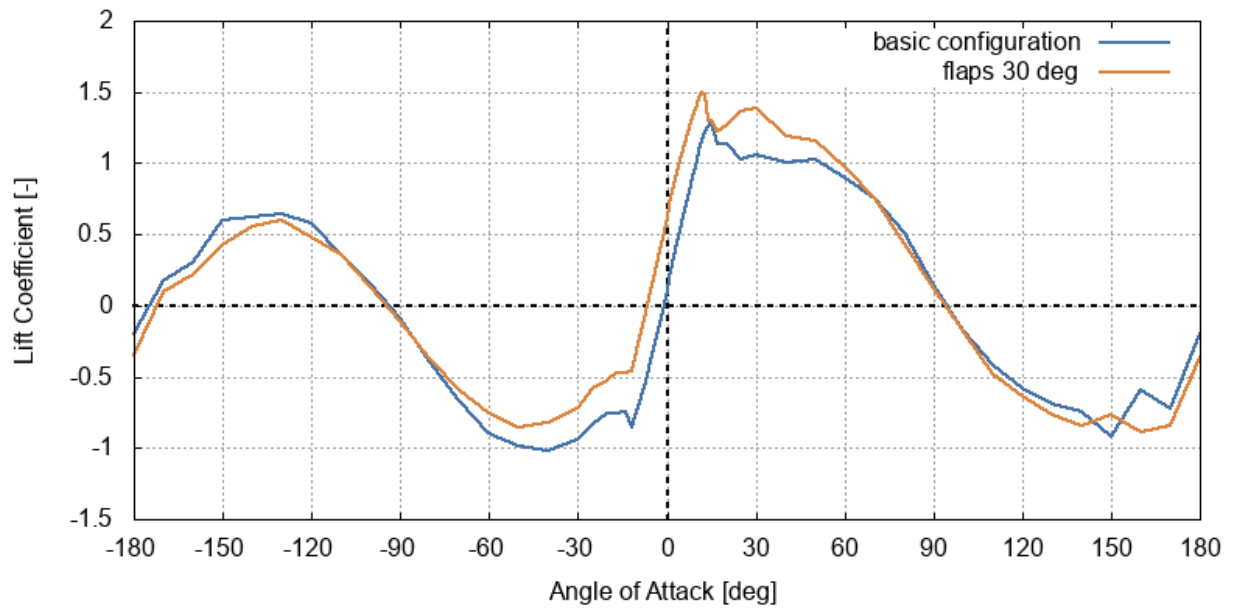


Lift coefficient

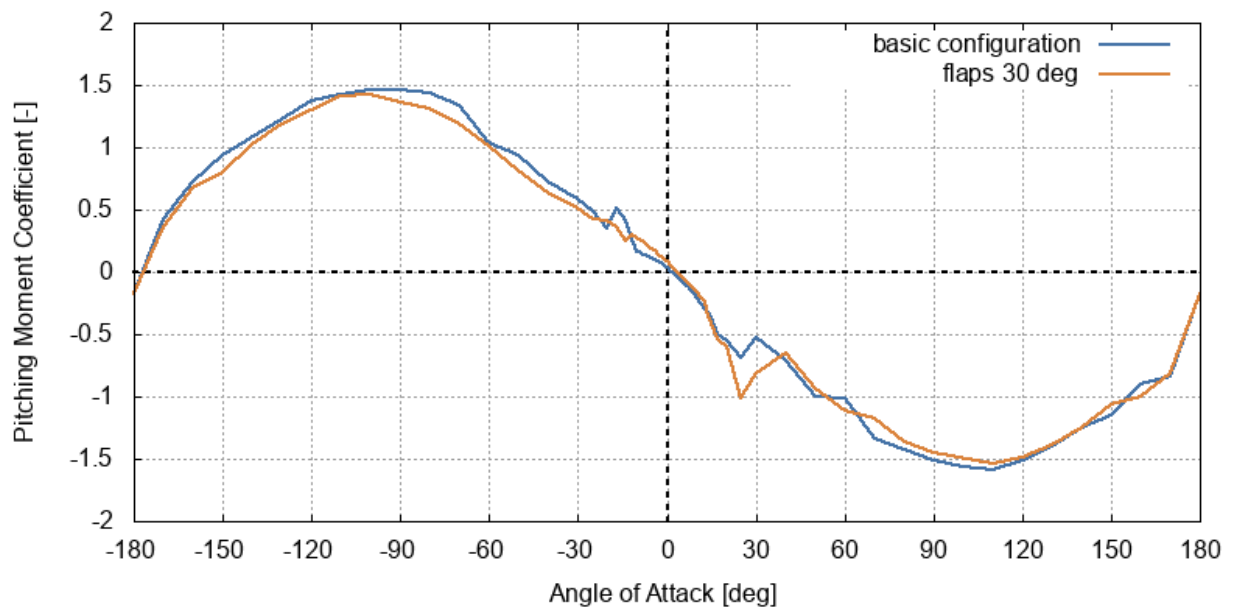


Pitching moment coefficient

Horizontal tail aerodynamic characteristics are shown in the following figures.

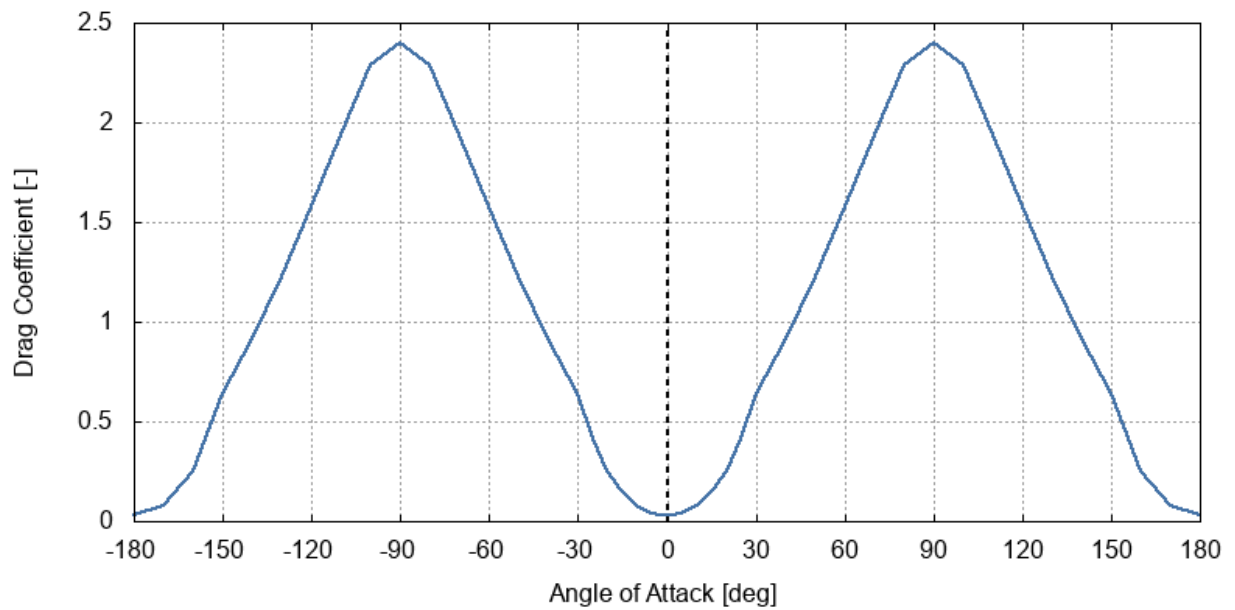


Horizontal tail drag coefficient

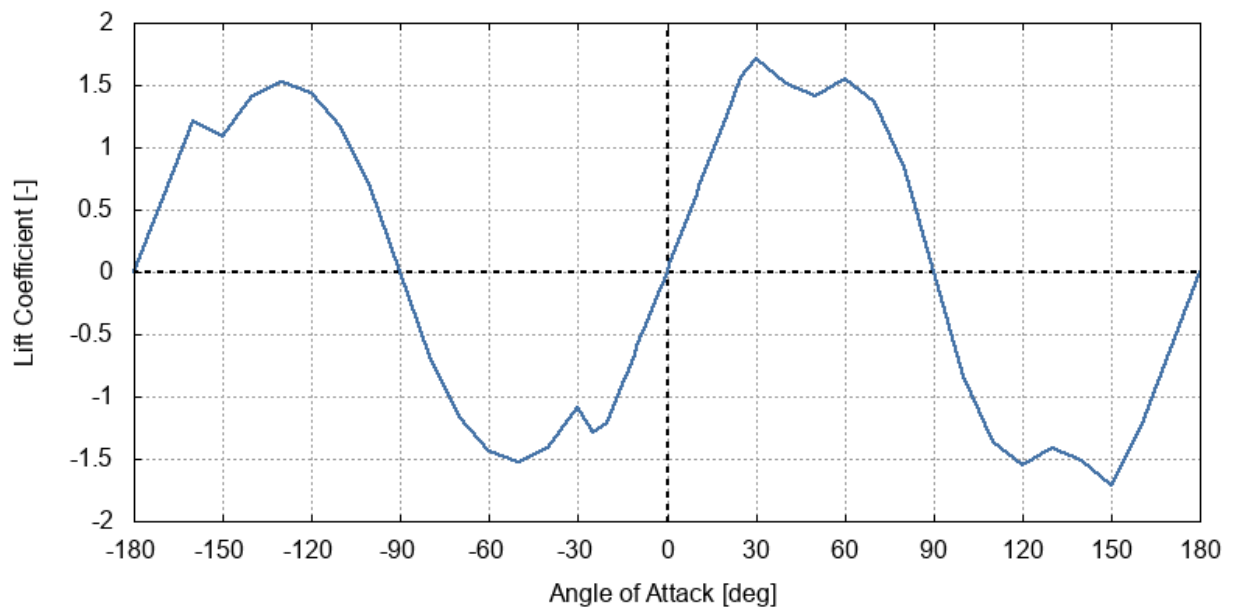


Horizontal tail lift coefficient


Vertical tail aerodynamic characteristics are shown in the following figures.

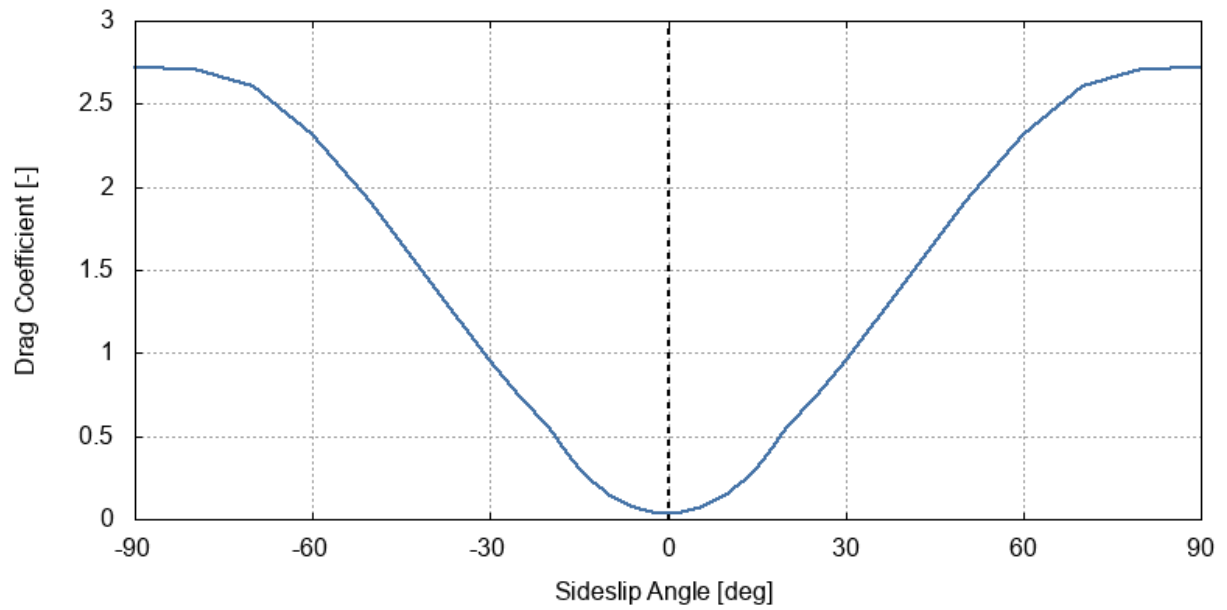

Vertical tail drag coefficient

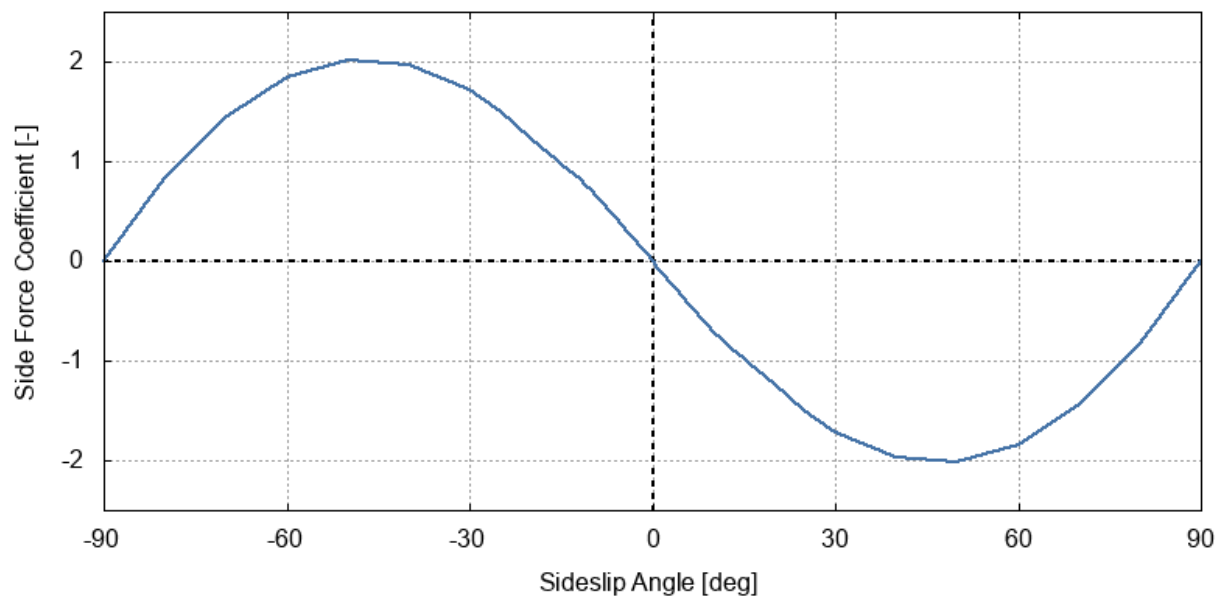

Vertical tail side force coefficient

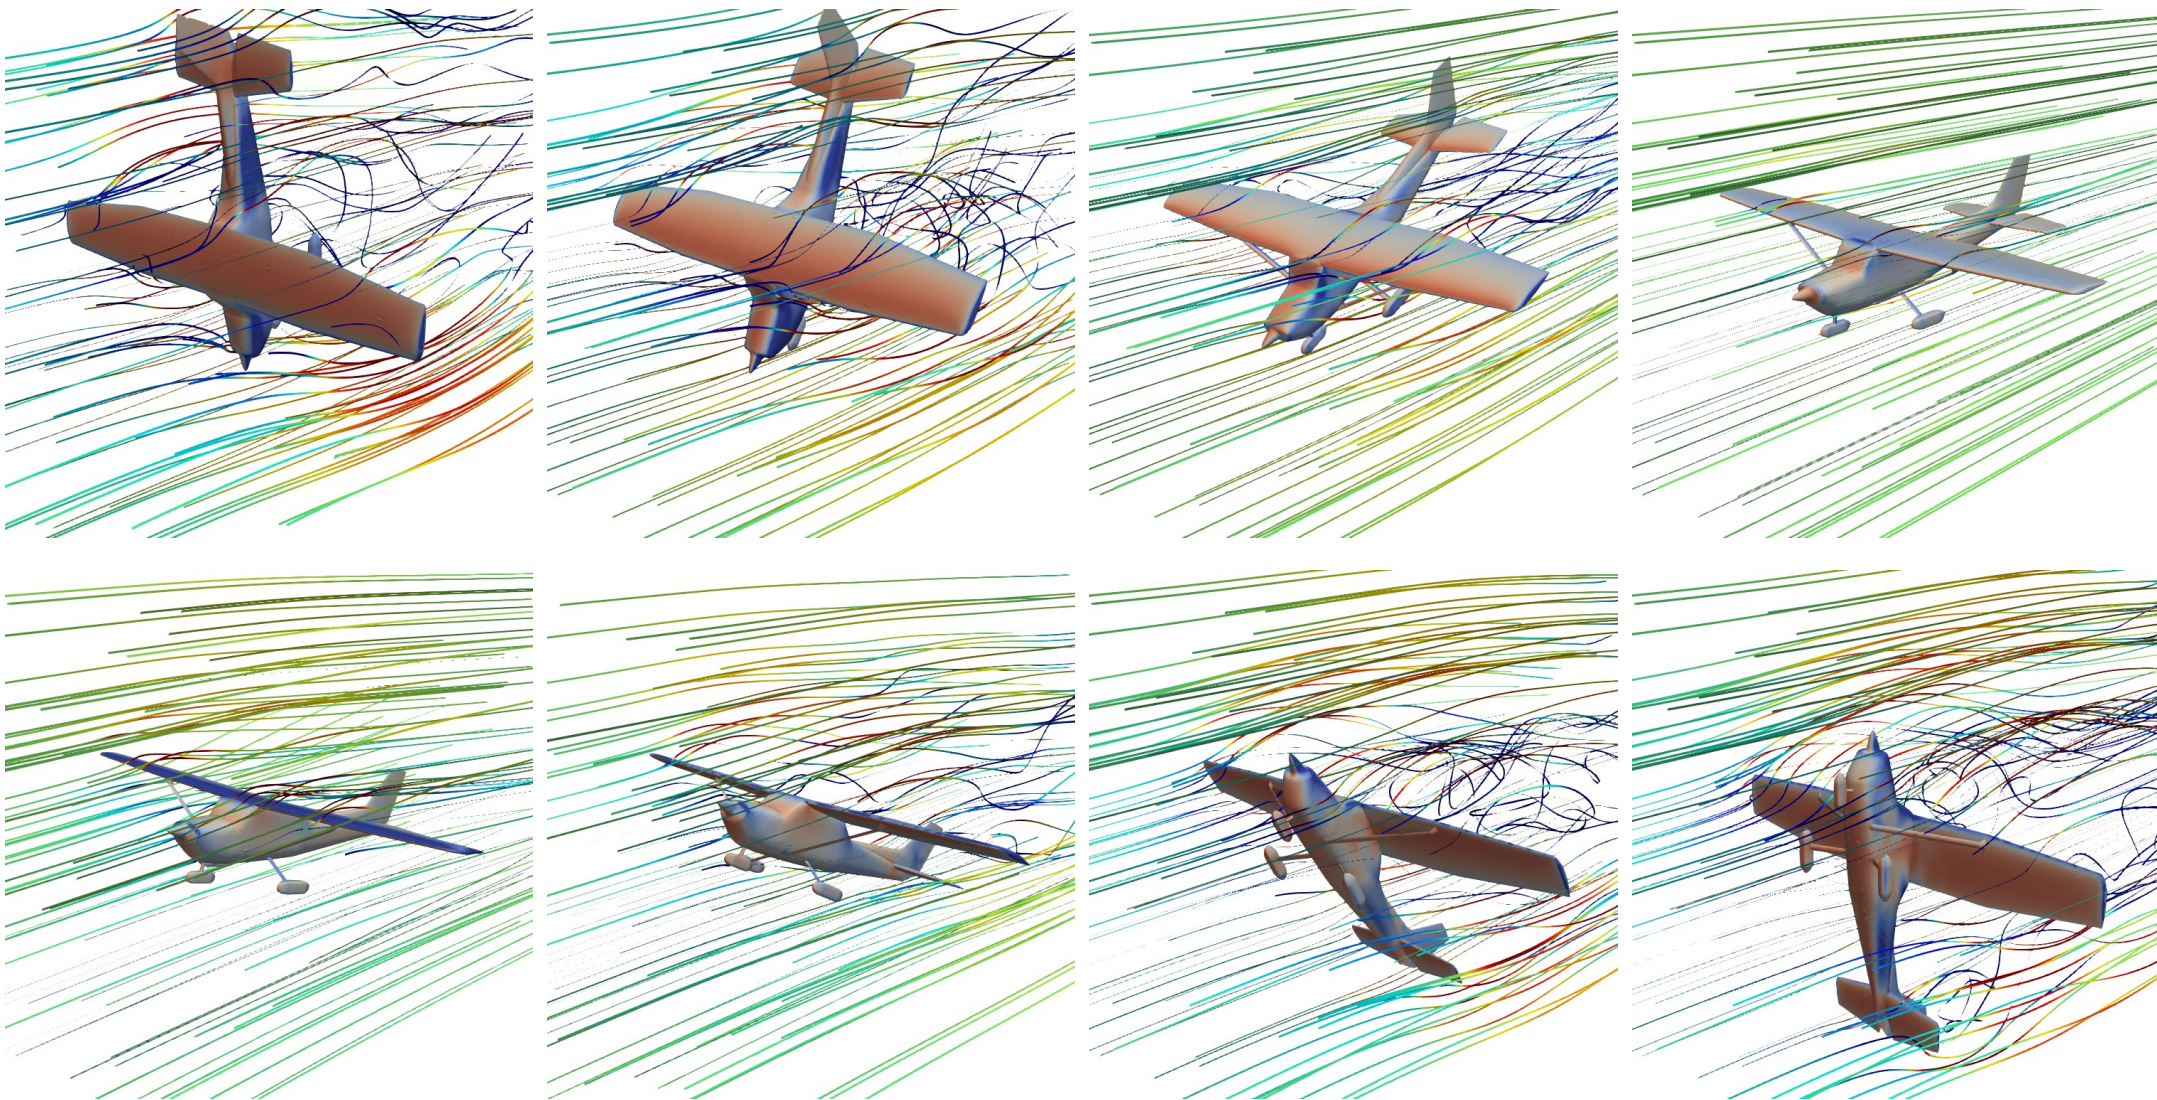

Streamlines and kinematic pressure distribution for various angles of attack

3.1. Aerodynamic Characteristics – Basic Configuration

α [deg]	CD [-]	CL [-]	Cm [-]
-180.0	-0.1778	0.0338	-0.2003
-170.0	0.4214	0.1030	0.1698
-160.0	0.7273	0.2816	0.3023
-150.0	0.9408	0.5539	0.6037
-130.0	1.2311	1.0571	0.6426
-120.0	1.3786	1.3222	0.5786
-110.0	1.4243	1.5438	0.3609
-100.0	1.4615	1.7340	0.1532
-90.0	1.4643	1.8145	-0.0913
-80.0	1.4349	1.8377	-0.3946
-70.0	1.3377	1.7304	-0.6656
-60.0	1.0434	1.5605	-0.8998
-50.0	0.9365	1.2568	-0.9829
-40.0	0.7292	0.9692	-1.0146
-30.0	0.5856	0.6722	-0.9432
-25.0	0.4891	0.5140	-0.8370
-20.0	0.3465	0.3618	-0.7529
-17.0	0.5161	0.3047	-0.7588
-14.0	0.4126	0.2144	-0.7404
-12.0	0.2684	0.1722	-0.8554
-10.0	0.1682	0.1034	-0.7501
-9.0	0.1571	0.0906	-0.6842
-8.0	0.1421	0.0783	-0.6075
-7.0	0.1347	0.0651	-0.5321
-6.0	0.1199	0.0568	-0.4424
-5.0	0.1090	0.0489	-0.3557
-4.0	0.0992	0.0418	-0.2679
-3.0	0.0830	0.0372	-0.1789
-2.0	0.0691	0.0336	-0.0889
-1.0	0.0513	0.0314	0.0049
0.0	0.0315	0.0306	0.0998
1.0	0.0126	0.0311	0.1944
2.0	-0.0026	0.0329	0.2898
3.0	-0.0282	0.0349	0.3881
4.0	-0.0551	0.0398	0.4839

Cessna 172 - Flight Simulation Data

α [deg]	CD [-]	CL [-]	Cm [-]
5.0	-0.0741	0.0449	0.5799
6.0	-0.0982	0.0521	0.6679
7.0	-0.1174	0.0607	0.7532
8.0	-0.1509	0.0694	0.8487
9.0	-0.1773	0.0807	0.9357
10.0	-0.2064	0.0925	1.0151
11.0	-0.2390	0.1063	1.0895
12.0	-0.2639	0.1206	1.1607
13.0	-0.2971	0.1369	1.2240
14.0	-0.3254	0.1525	1.2558
15.0	-0.3631	0.1726	1.2930
17.0	-0.5042	0.2169	1.1411
20.0	-0.5533	0.3184	1.1328
25.0	-0.6826	0.4824	1.0309
40.0	-0.7076	0.9254	1.0062
50.0	-0.9984	1.2527	1.0285
60.0	-1.0141	1.4544	0.8901
70.0	-1.3370	1.8579	0.7527
80.0	-1.4293	1.9547	0.5114
90.0	-1.5130	1.9055	0.1421
100.0	-1.5670	1.8449	-0.1712
110.0	-1.5886	1.6785	-0.4155
120.0	-1.5085	1.4831	-0.5821
130.0	-1.3977	1.2191	-0.6926
140.0	-1.2469	0.8872	-0.7399
150.0	-1.1508	0.7052	-0.9188
160.0	-0.8942	0.3447	-0.5876
170.0	-0.8425	0.1365	-0.7211
180.0	-0.1756	0.0339	-0.1950

Aerodynamic Characteristics – Basic Configuration

3.2. Aerodynamic Characteristics – Tail-Off Configuration

α [deg]	CD [-]	CL [-]	Cm [-]
-180.0	0.0298	-0.1710	-0.0570
-170.0	0.0967	0.0630	0.2040
-160.0	0.2776	0.3320	0.3080
-140.0	0.6842	0.5100	0.4580
-130.0	0.8782	0.5090	0.4850
-120.0	1.0930	0.4170	0.4880
-110.0	1.2410	0.2640	0.4620
-100.0	1.4079	0.1010	0.4480
-90.0	1.4391	-0.0870	0.4240
-80.0	1.4722	-0.3260	0.3560
-70.0	1.3311	-0.5330	0.2440
-60.0	1.2737	-0.7370	0.2170
-50.0	1.0418	-0.8160	0.1610
-40.0	0.7928	-0.8270	0.0740
-30.0	0.5500	-0.7710	0.0110
-25.0	0.4280	-0.6900	-0.0030
-20.0	0.3060	-0.6330	-0.0240
-17.0	0.2303	-0.5750	-0.0560
-14.0	0.1721	-0.6010	-0.0690
-12.0	0.1383	-0.7340	-0.0840
-10.0	0.0835	-0.6390	-0.1170
-9.0	0.0718	-0.5840	-0.1090
-8.0	0.0631	-0.5170	-0.0990
-7.0	0.0520	-0.4450	-0.0920
-6.0	0.0452	-0.3640	-0.0860
-5.0	0.0391	-0.2830	-0.0790
-4.0	0.0341	-0.2000	-0.0750
-3.0	0.0299	-0.1190	-0.0680
-2.0	0.0274	-0.0360	-0.0630
-1.0	0.0260	0.0500	-0.0600
0.0	0.0268	0.1370	-0.0580
1.0	0.0267	0.2240	-0.0550
2.0	0.0291	0.3130	-0.0550
3.0	0.0319	0.4010	-0.0550
4.0	0.0366	0.4850	-0.0560

Cessna 172 - Flight Simulation Data

α [deg]	CD [-]	CL [-]	Cm [-]
5.0	0.0417	0.5760	-0.0580
6.0	0.0486	0.6540	-0.0590
7.0	0.0562	0.7350	-0.0620
8.0	0.0644	0.8200	-0.0660
9.0	0.0740	0.8980	-0.0700
10.0	0.0851	0.9680	-0.0740
11.0	0.0969	1.0320	-0.0760
12.0	0.1097	1.0960	-0.0820
13.0	0.1235	1.1500	-0.0840
14.0	0.1368	1.1660	-0.0790
15.0	0.1545	1.1960	-0.0850
17.0	0.1863	0.9820	-0.0570
20.0	0.2641	0.9600	-0.0650
25.0	0.3856	0.8130	-0.0610
40.0	0.7971	0.8380	-0.1300
50.0	1.0567	0.8370	-0.2130
60.0	1.2355	0.7410	-0.2630
70.0	1.5629	0.6210	-0.3740
80.0	1.6306	0.4160	-0.4100
90.0	1.6088	0.0850	-0.5150
100.0	1.5656	-0.1780	-0.6040
110.0	1.4494	-0.3640	-0.6300
120.0	1.2192	-0.5000	-0.6320
130.0	1.0382	-0.6320	-0.6440
140.0	0.7815	-0.6770	-0.6090
150.0	0.5442	-0.6570	-0.5460
160.0	0.2884	-0.5130	-0.4510
170.0	0.0986	-0.4690	-0.3780
180.0	0.0299	-0.1720	-0.0570

Aerodynamic Characteristics – Tail-Off Configuration

3.3. Aerodynamic Characteristics – 30-degree Flaps

α [deg]	CD [-]	CL [-]	Cm [-]
-180.0	0.0529	-0.3225	-0.0537
-170.0	0.1285	-0.0078	0.1557
-160.0	0.2538	0.0817	0.2389
-150.0	0.4664	0.3472	0.3547
-140.0	0.6771	0.4230	0.4251
-130.0	0.8993	0.4518	0.4534
-120.0	1.1161	0.3756	0.4537
-110.0	1.2438	0.2542	0.4307
-100.0	1.2982	0.0757	0.4046
-90.0	1.3878	-0.1005	0.3600
-80.0	1.3816	-0.3092	0.2814
-70.0	1.2298	-0.4511	0.2076
-60.0	1.1352	-0.6089	0.1662
-50.0	0.9081	-0.6506	0.0561
-40.0	0.6980	-0.6471	0.0009
-30.0	0.4615	-0.5254	-0.0844
-25.0	0.3435	-0.4201	-0.0917
-20.0	0.2442	-0.3710	-0.1092
-17.0	0.1858	-0.3083	-0.1330
-14.0	0.1458	-0.3807	-0.1384
-12.0	0.0868	-0.2800	-0.2210
-10.0	0.0711	-0.1308	-0.2163
-9.0	0.0648	-0.0469	-0.2149
-8.0	0.0616	0.0293	-0.2075
-7.0	0.0574	0.1202	-0.2068
-6.0	0.0560	0.2120	-0.2047
-5.0	0.0560	0.2945	-0.2001
-4.0	0.0556	0.3790	-0.1971
-3.0	0.0578	0.4673	-0.1965
-2.0	0.0604	0.5478	-0.1945
-1.0	0.0643	0.6360	-0.1956
0.0	0.0692	0.7182	-0.1937
1.0	0.0750	0.8025	-0.1941
2.0	0.0817	0.8879	-0.1957
3.0	0.0888	0.9666	-0.1974

Cessna 172 - Flight Simulation Data

α [deg]	CD [-]	CL [-]	Cm [-]
4.0	0.0974	1.0448	-0.1980
5.0	0.1064	1.1310	-0.2020
6.0	0.1161	1.1935	-0.2011
7.0	0.1270	1.2598	-0.2029
8.0	0.1382	1.3319	-0.2052
9.0	0.1495	1.3858	-0.2039
10.0	0.1612	1.4321	-0.2020
11.0	0.1731	1.4757	-0.2014
12.0	0.1837	1.4940	-0.1945
13.0	0.1926	1.4795	-0.1825
14.0	0.2490	1.2353	-0.1672
15.0	0.2482	1.2053	-0.1510
17.0	0.2834	1.0751	-0.1414
20.0	0.3758	1.1163	-0.1603
25.0	0.5225	1.0239	-0.1690
30.0	0.0000	0.0000	0.0000
40.0	1.0254	1.0974	-0.2130
50.0	1.2443	1.0122	-0.2561
60.0	1.3797	0.8102	-0.2864
70.0	1.6451	0.6594	-0.3595
80.0	1.5071	0.2967	-0.3949
90.0	1.6190	0.0959	-0.4701
100.0	1.6395	-0.2250	-0.5878
110.0	1.3622	-0.4290	-0.5930
120.0	1.1828	-0.5559	-0.5994
130.0	0.9879	-0.6638	-0.6013
140.0	0.6681	-0.6541	-0.5477
150.0	0.4482	-0.6421	-0.4967
160.0	0.2649	-0.6563	-0.4489
170.0	0.0876	-0.7738	-0.3934
180.0	0.0529	-0.3225	-0.0537

Aerodynamic Characteristics – 30-degree Flaps

4. Mass Data

Data given in [3], data from chapter 1. and coordinates of structure groups estimated using aircraft drawing were used to calculate empty aircraft inertia tensor and center of mass coordinates. Results are given in the following table.

Parameter	Value
Center of mass x-coordinate	-0.20 m
Center of mass y-coordinate	0.00 m
Center of mass z-coordinate	-0.10 m
Moment of inertia I_x	2 424.2 kg·m ²
Moment of inertia I_y	2 427.3 kg·m ²
Moment of inertia I_z	4 372.5 kg·m ²
Cross product of inertia I_{xy}	0.0 kg·m ²
Cross product of inertia I_{xz}	-161.5 kg·m ²
Cross product of inertia I_{yz}	0.0 kg·m ²

Empty aircraft inertia tensor and center of mass coordinates

Structure group	Weight [kg]	Coordinates [m]			First moment of mass [kg·m]			Moment of inertia [kg·m ²]			Moment of inertia (Body Axis System) [kg·m ²]					
		<i>x</i>	<i>y</i>	<i>z</i>	<i>S_X</i>	<i>S_Y</i>	<i>S_Z</i>	<i>I_{x,0}</i>	<i>I_{y,0}</i>	<i>I_{z,0}</i>	<i>I_x</i>	<i>I_y</i>	<i>I_z</i>	<i>I_{xy}</i>	<i>I_{xz}</i>	<i>I_{yz}</i>
Wing	201.9	-0.10	0.00	-0.73	-20.2	0.0	-147.4	2 037.2	38.9	2 073.0	2 144.8	148.5	2 075.1	0.0	-14.7	0.0
Tail	52.2	-4.70	0.00	-0.34	-245.3	0.0	-17.7	53.3	10.4	58.1	59.4	1 169.1	1 210.9	0.0	-83.4	0.0
Fuselage	216.4	-0.70	0.00	-0.13	-151.5	0.0	-28.1	39.4	473.6	474.8	43.1	583.3	580.8	0.0	-19.7	0.0
Landing gear	104.4	0.10	0.00	0.90	10.4	0.0	93.9	69.9	39.9	102.4	154.5	125.4	103.5	0.0	-9.4	0.0
Surface controls	26.5	0.60	0.00	0.06	15.9	0.0	1.6	3.1	2.4	3.7	3.2	12.1	13.2	0.0	-1.0	0.0
Nacelle	26.5	1.60	0.00	0.14	42.4	0.0	3.7	4.6	4.8	4.6	5.1	73.2	72.5	0.0	-5.9	0.0
Engine	126.1	1.55	0.00	0.14	195.5	0.0	17.7	11.7	10.2	13.6	14.2	315.6	316.5	0.0	-27.4	0.0

Structure groups breakdown

Bibliography

- [1] Information Manual Skyhawk SP Cessna Aircraft Company Model 172S, Revision 5. Cessna Aircraft Company, 2004
- [2] Jackson P., et al.: Jane's All the World's Aircraft 2004-2005. Jane's Information Group, 2004
- [3] Torenbeek E.: Synthesis of Subsonic Airplane Design. Delft University Press, 1982
- [4] Belsterling C.: Design and Test of the 172K Fluidic Rudder. National Aeronautics and Space Administration, CR-158974, 1978
- [5] Type-Certificate Data Sheet for Cessna 172 Series (Skyhawk). European Aviation Safety Agency, EASA.IM.A.051, 2018
- [6] Roesch P., Harlan R.: A Passive Gust Alleviation System for a Light Aircraft. National Aeronautics and Space Administration, CR-2605, 1975
- [7] Operator's Manual Textron Lycoming Aircraft Engines Series O-360, HO-360, IO-360, AIO-360, HIO-360 & TIO-360. Textron Lycoming, 2005