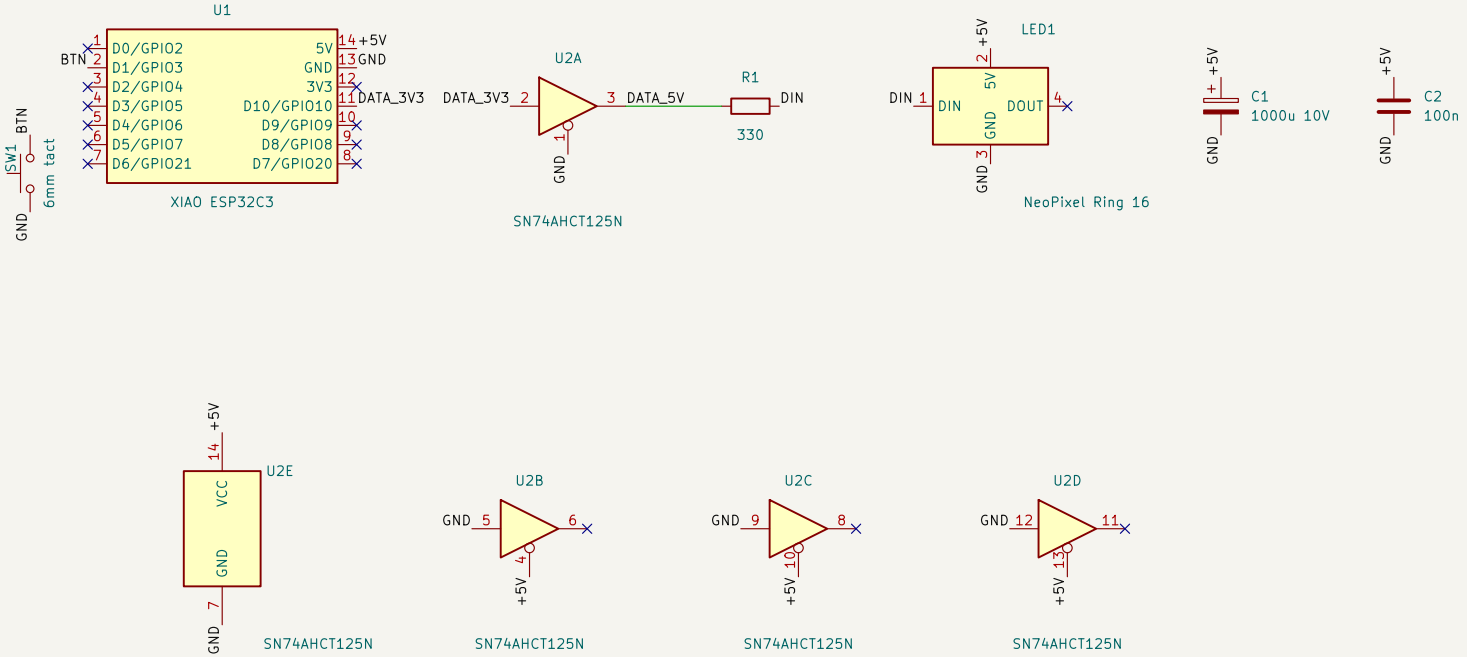


Phrase Countdown Light
+5V = USB VBUS passed through the XIAO 5V pin.
U2 gate 1 shifts GPIO10 (3.3 V) to 5 V; AHCT reads >2.0 V as high. Spare gates 2–4 disabled (OE high, A low).
R1 sits at the U2 end of the data wire. C1 mounts at the ring's power pads, C2 at U2 pin 14.
SW1 uses GPIO3's internal pull-up. GPIO2/8/9 are ESP32-C3 strapping pins and stay unused.

Sheet: /		
File: countdown-light.kicad_sch		
Title: Phrase Countdown Light		
Size: A4	Date: 2026-11-05	**Rev:**
KiCad E.D.A. 10.0.8		Id: 1/1