


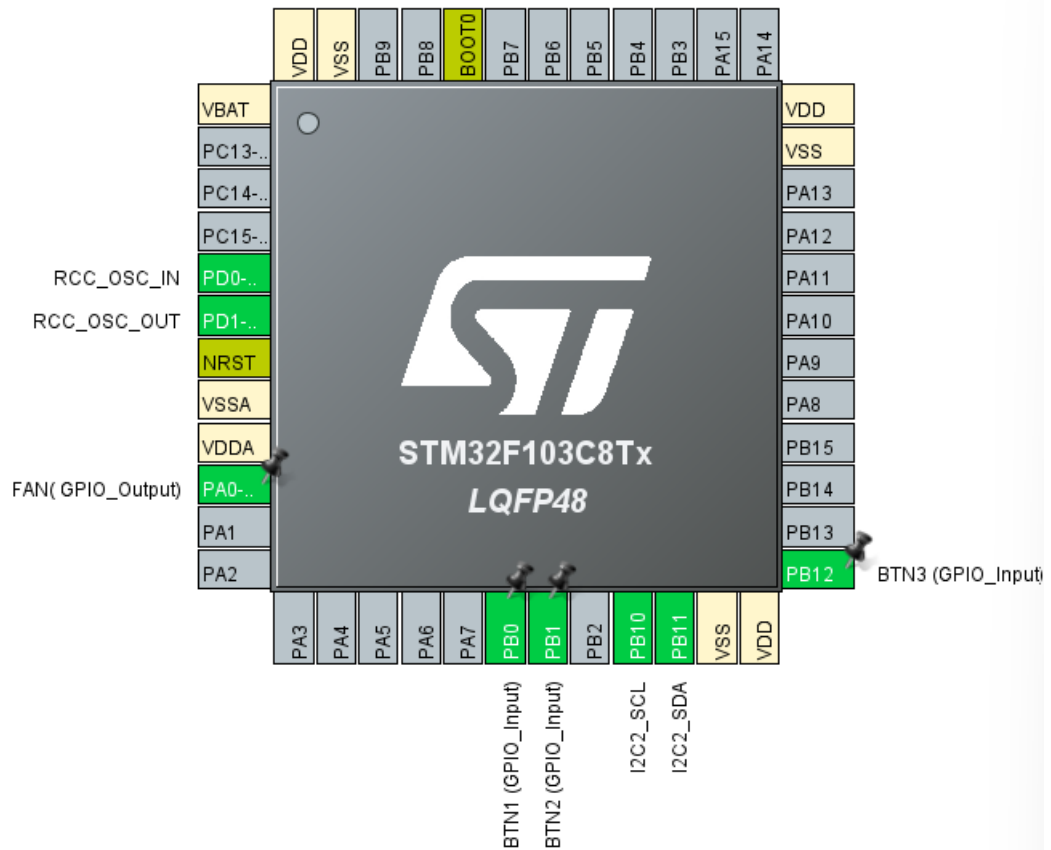

☒ GPIO

☒ I2C

☒ RCC

Search Signals

Search (Ctrl+F)

☐ Show only Modified Pins

Pin Name	Signal on Pin	GPIO output...	GPIO mode	GPIO Pull-u...	...	User Label	Modified
PA0-WKUP	n/a	Low	Output Pus...	No pull-up ...	Low	FAN(GPIO_Output)	☒
PB0	n/a	n/a	Input mode	Pull-up	n/a	BTN1 (GPIO_Input)	☒
PB1	n/a	n/a	Input mode	Pull-up	n/a	BTN2 (GPIO_Input)	☒
PB12	n/a	n/a	Input mode	Pull-up	n/a	BTN3 (GPIO_Input)	☒

☒ GPIO

☒ I2C

☒ RCC

Search Signals

Search (Ctrl+F)

☐ Show only Modified Pins

Pin Name	Signal on Pin	GPIO...	GPIO mode	GPIO Pull-u...	Maximum o...	User Label	Modified
PB10	I2C2_SCL	n/a	Alternate Fun...	n/a	High		☐
PB11	I2C2_SDA	n/a	Alternate Fun...	n/a	High		☐

GPIO

I2C

RCC

Search Signals

Search (Ctrl+F)

Show only Modified Pins

Pin Name	Signal ...	GPIO output...	GPIO mode	GPIO Pull-...	Maximum o...	User Label	Modified
PD0-OSC_IN	RCC_OSC...	n/a	n/a	n/a	n/a		☐
PD1-OSC_OUT	RCC_OSC...	n/a	n/a	n/a	n/a		☐

NVIC

Code generation

Priority Group

4 bit...

Sort by Preemption Priority and Sub Priority

Sort by interrupts names

Search

Show

available interrupts

Force DMA channels Interrupts

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
Non maskable interrupt	☒	0	0
Hard fault interrupt	☒	0	0
Memory management fault	☒	0	0
Prefetch fault, memory access fault	☒	0	0
Undefined instruction or illegal state	☒	0	0
System service call via SWI instruction	☒	0	0
Debug monitor	☒	0	0
Pendable request for system service	☒	0	0
Time base: System tick timer	☒	15	0
PVD interrupt through EXTI line 16	☐	0	0
Flash global interrupt	☐	0	0
RCC global interrupt	☐	0	0
TIM3 global interrupt	☒	0	0
I2C2 event interrupt	☒	0	0
I2C2 error interrupt	☒	0	0

RCC Mode and Configuration

Mode

High Speed Clock (HSE) Crystal/Ceramic Resonator

Low Speed Clock (LSE) Disable

Master Clock Output

Configuration

Reset Configuration

Parameter Settings

User Constants

NVIC Settings

GPIO Settings

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
RCC global interrupt	☐	0	0

TIM3 Mode and Configuration

Mode

Slave Mode

Disable

Trigger Source

Disable

☒ Internal Clock

Channel1

Disable

Channel2

Disable

Channel3

Disable

Channel4

Disable

Combined Channels

Disable

☐ XOR activation

☐ One-Pulse Mode

Configuration

Reset Configuration

Parameter Settings

User Constants

NVIC Settings

DMA Settings

Configure the below parameters :

Search (Ctrl+F)

Counter Settings

Prescaler (PSC - 16 bits value)

7199

Counter Mode

Up

Counter Period (AutoReload Register - 16 b...

4999

Internal Clock Division (CKD)

No Division

auto-reload preload

Disable

Trigger Output (TRGO) Parameters

Master/Slave Mode (MSM bit)

Disable (Trigger input effect not delayed)

Trigger Event Selection

Reset (UG bit from TIMx EGR)

TIM3 Mode and Configuration

Mode

Slave Mode

Disable

Trigger Source

Disable

☒ Internal Clock

Channel1

Disable

Channel2

Disable

Channel3

Disable

Channel4

Disable

Combined Channels

Disable

☐ XOR activation

☐ One-Pulse Mode

Configuration

Reset Configuration

Parameter Settings

User Constants

NVIC Settings

DMA Settings

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
TIM3 global interrupt	☒	0	0

I2C2 Mode and Configuration

Mode

I2C I2C

Configuration

Reset Configuration

✓ Parameter Settings

✓ User Constants

✓ NVIC Settings

✓ DMA Settings

✓ GPIO Settings

Configure the below parameters :

Search (Ctrl+F)

Master Features

I2C Speed Mode

Standard Mode

I2C Clock Speed (Hz)

100000

Slave Features

Clock No Stretch Mode

Disabled

Primary Address Length selection

7-bit

Dual Address Acknowledged

Disabled

Primary slave address

0

Configuration

Reset Configuration

✓ Parameter Settings

✓ User Constants

✓ NVIC Settings

✓ DMA Settings

✓ GPIO Settings

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
I2C2 event interrupt	✓	0	0
I2C2 error interrupt	✓	0	0

