PIN OUT

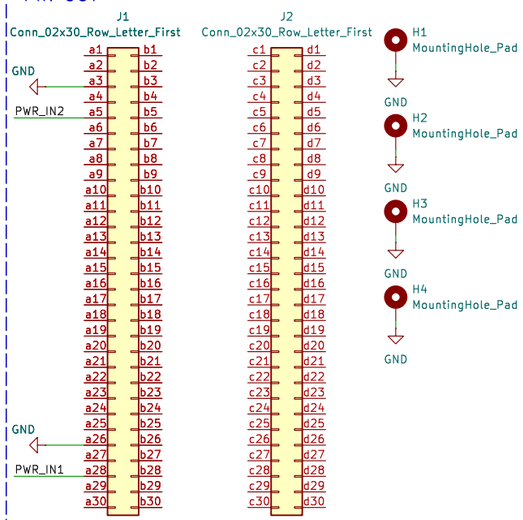

MICROCONTROLLER

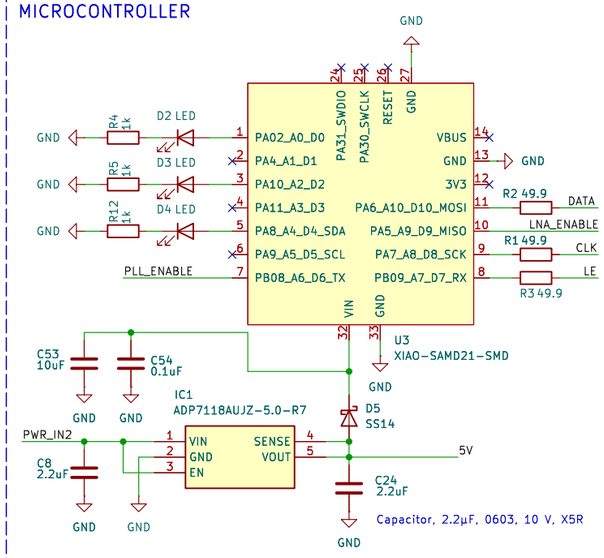

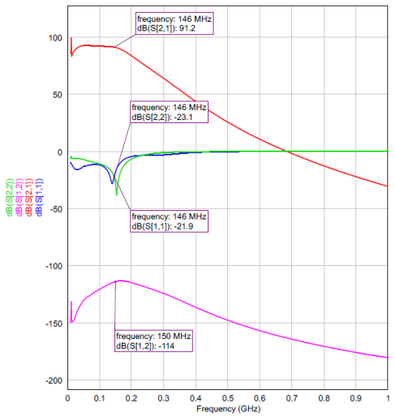

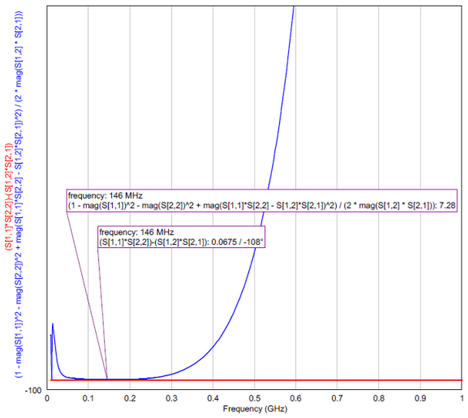

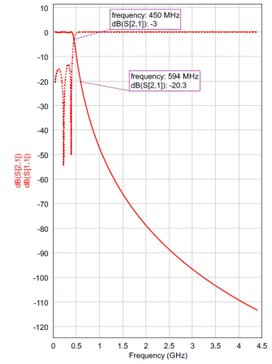

PCB Stackup & Fabrication ParametersLayer Count:
4Board Thickness: 1.6 mm
Base Material: FR4Layer Order: Top (RF/Signal) | In1 (GND) | In2 (VCC) | Bottom (Signal)
Outer Copper Weight: 1 oz (0.035 mm)
Inner Copper Weight: 0.5 oz (0.015 mm)
RF Dielectric (Top to In1): 0.2 mm (Prepreg 7628, Er: approx 4.4)RF
JLCPCB Profile: JLC04161H-7628 (Standard)
Impedance Control Service: No
NoSurface Finish: ENIG

LOW NOISE AMPLIFIER

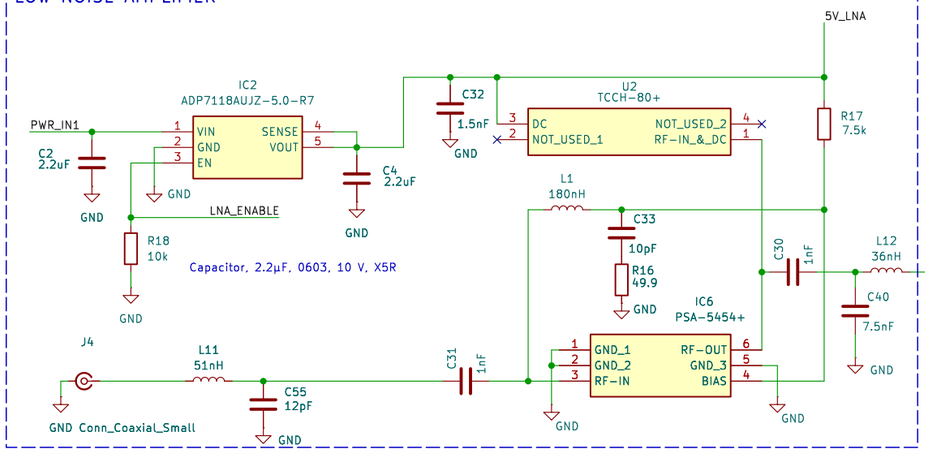

AMPLIFIER

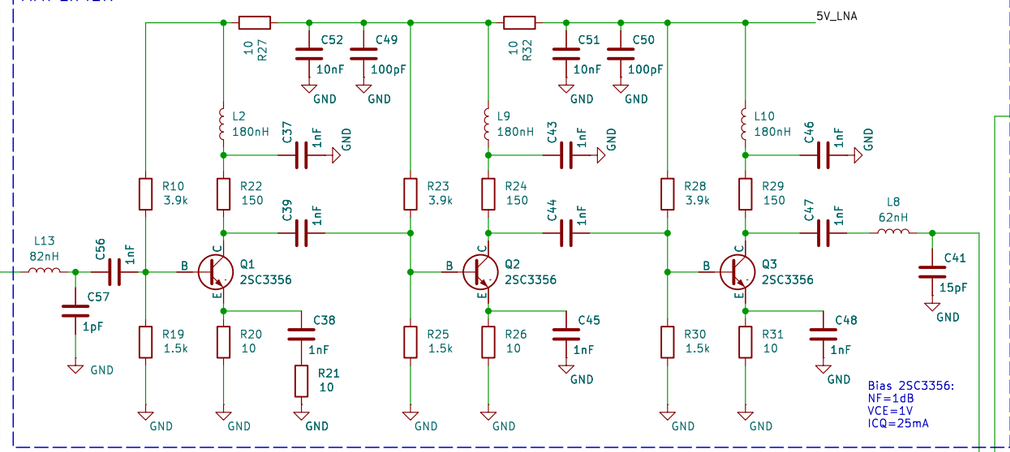

FILTER

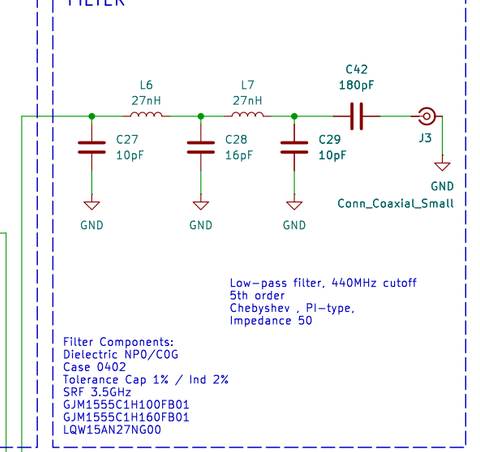

LOCAL OSCILATOR

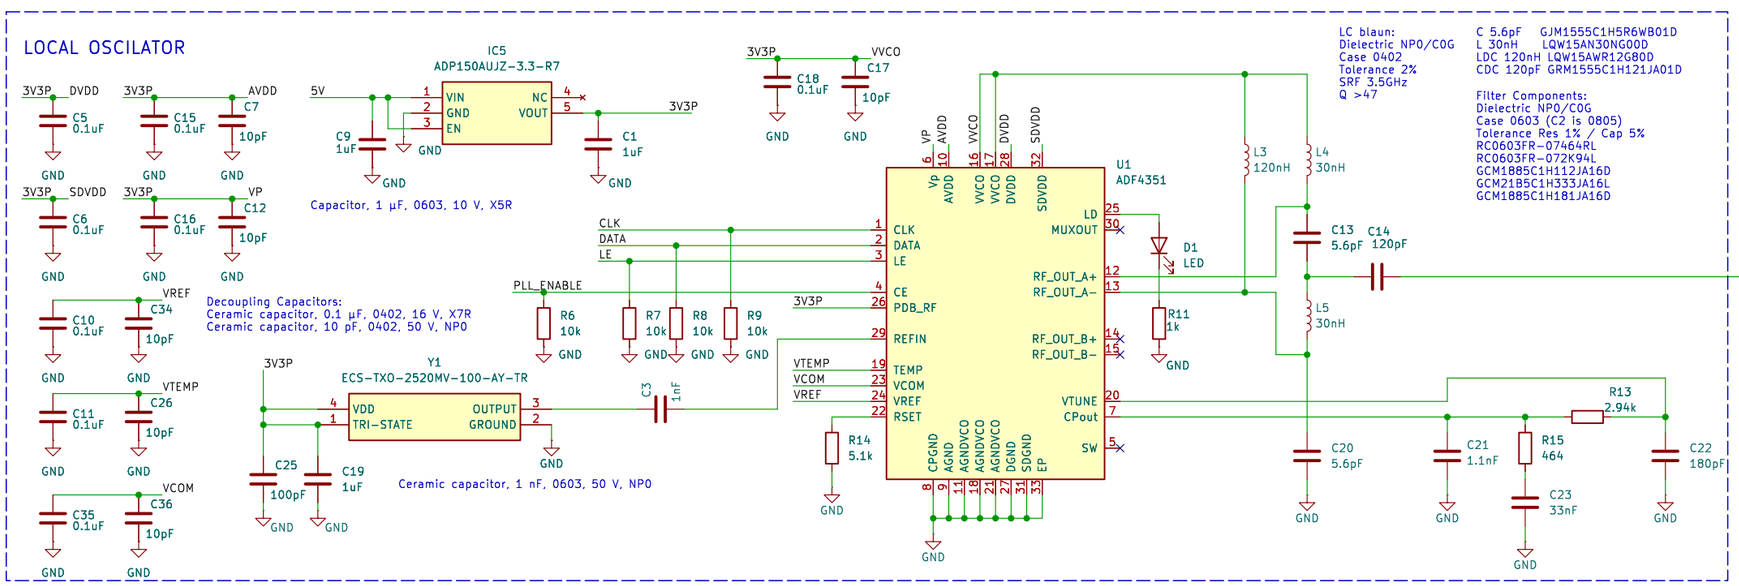

MIXER

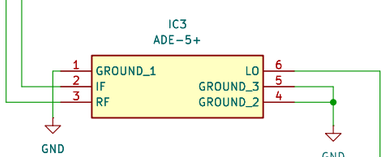

UNIVERSIDAD NACIONAL DE CÓRDOBA
FCEFyN
FACULTAD DE CIENCIAS EXACTAS, FÍSICAS y NATURALES

Sheet: /
File: PCI-104-Template.kicad_sch

Title: TRANSPONDER CUBESAT VHF/UHF

Size: A3	Date: 2024-11-25	Rev: A
KiCad E.D.A. 9.0.4		Id: 1/1