
DWG-001 · ENVELOPE DRAWING · REV D


Peristaltic pump — top, bottom & lateral

UNITS mm · X = shaft axis
NOT TO SCALE — use dimensions


1 · TOP VIEW — pump head face

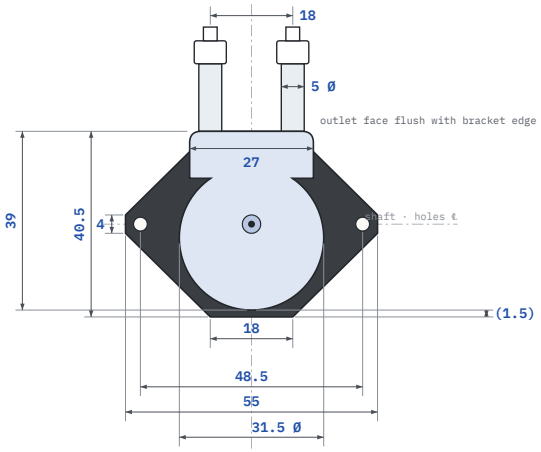


2 · LATERAL VIEW A — side

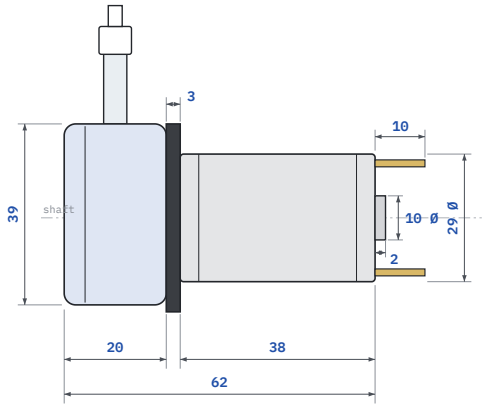

3 · LATERAL VIEW B — tube side

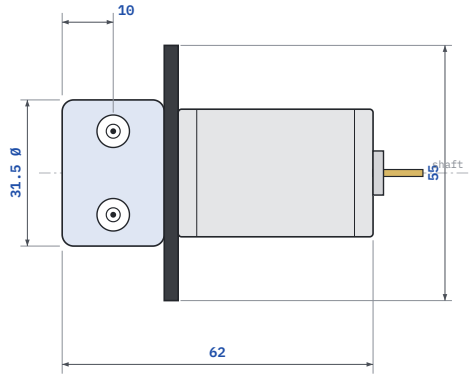

4 · BOTTOM VIEW — motor end

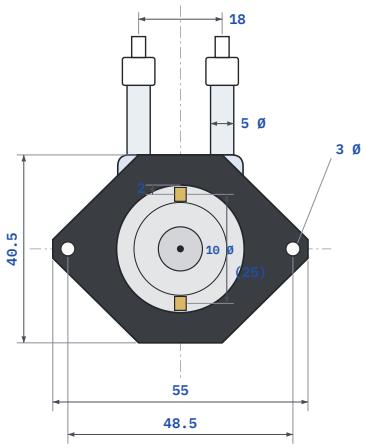

MEASUREMENT SCHEDULE (mm)

A	Overall length, head front face → motor end cap · Lateral A / B	**62**
B	Pump head length, outlet face → cover end (excl. tubes) · Top / Lat. A	**39**
C	Bracket width, end to end · Top / Bottom	**55**
D	Bracket end flat width · Top	**4**
E	Rear shaft boss, diameter × protrusion · Lateral / Bottom	**10 Ø × 2**
M01	Pump head depth (front face → bracket face) · Lateral A	**20**
M02	Pump head cover diameter · Top / Lat. B	**31.5**
M03	Bracket plate thickness · Lateral A	**3**
M04	Bracket height (flat edge to flat edge) · Top / Bottom	**40.5**
M05	Motor can diameter · Lateral A	**29**
M06	Motor length (bracket rear face → end cap) · Lateral A	**38**
M07	Terminal protrusion beyond end cap · Lateral A	**10**
M08	Terminal spacing (derived: 2 mm in from can edge) · Bottom	**(25)**
M09	Tube spacing (centre-to-centre) · Top / Bottom	**18**
M10	Tube outer diameter · Top / Bottom	**5**
M15	Mounting hole spacing · Top / Bottom	**48.5**
M16	Mounting hole diameter · Bottom	**3**
M19	Tube centre from head front face · Lateral B	**10**
M23	Tube-outlet block width · Top	**27**
M26	Bracket flat edge length · Top	**18**

NOTES

1. Bracket is symmetric; shaft and mounting holes share one centreline. The outlet face sits flush with one bracket flat edge; the cover end sits 1.5 inside the opposite edge (40.5 − 39). The outlet block corners (27) overhang the 18 flat edge.

2. Lateral A: 20 + 3 + 38 = 61, 1 mm short of the 62 overall. Rear shaft boss (Ø10 × 2) and terminals (10) are drawn beyond the motor end cap, outside the 62.