CATAPULT MAINTENANCE ACTION

CATAPULT NO. _____ JSN _____ DATE _____

PMS BEING PERFORMED _____

SHOT NO. _____ SHOTS SINCE LAST INSP. _____

WATER BRAKE AND PISTON ASSEMBLY DATA

TELESCOPE CLEARANCE

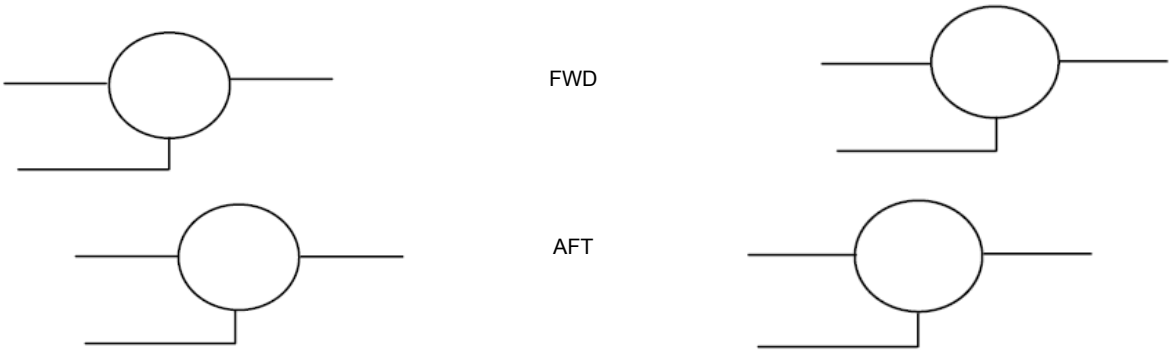

NOTE: FOR AFT 6 O'CLOCK CLEARANCE, USE AVERAGE OF 5 AND 7 O'CLOCK READINGS

DEFLECTOR RING TO STRIKER RING CLEARANCE

PORT _____ STBD _____

NOTE: BUTTRESS, TELESCOPE AND STRIKER RING READINGS ARE REQUIRED ONLY AT INSTALLATION AND WHEN NEEDED FOR TROUBLESHOOTING WEAR OR ALIGNMENT PROBLEMS.

PORT	PISTON DIAMETER	STBD
1/7 O'CLOCK _____ IN.		1/7 O'CLOCK _____ IN.
1 1/5 O'CLOCK _____ IN.		1 1/5 O'CLOCK _____ IN.

PISTON GUIDE WEAR

CYLINDER WALL TO DEFLECTOR RING CLEARANCES

	6 O'CLOCK	11 O'CLOCK	1 O'CLOCK
PORT	_____ IN.	_____ IN.	_____ IN.
STBD	_____ IN.	_____ IN.	_____ IN.

NOTE: TAKE 11 O'CLOCK AND 1 O'CLOCK READINGS WITH PISTON GUIDE JACKED UP FLUSH WITH INSIDE DIAMETER OF CYLINDER.

REMARKS

MAINT MAN _____ W/C SUPERVISOR _____

QA INSPECTOR _____ MAINT. CHIEF/OFFICER _____