


Power supply

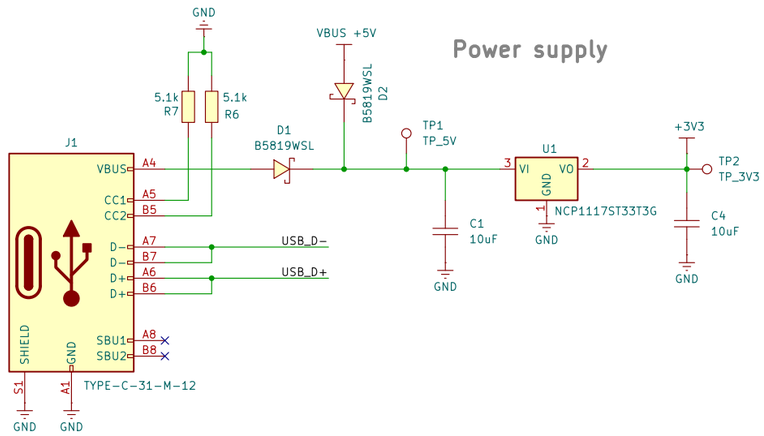


Flash storage

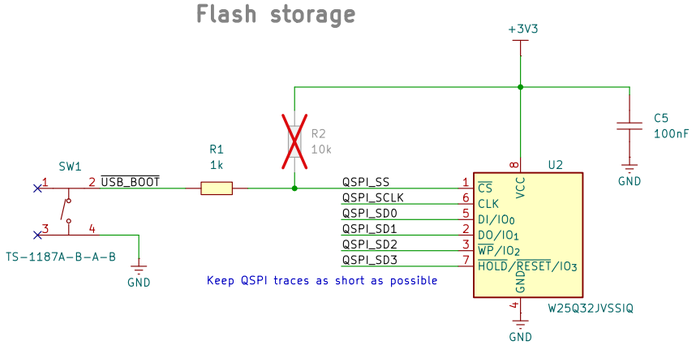

Crystal oscillator

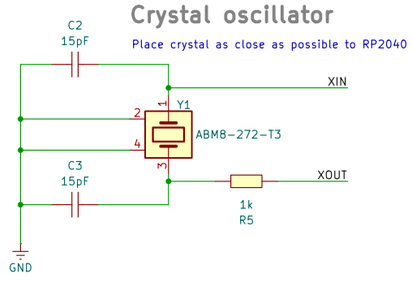


SWD Debug




MH1
NPTH FD2.75mm SM3.15mm KO6mm
MH2
NPTH FD2.75mm SM3.15mm KO6mm
MH3
NPTH FD2.75mm SM3.15mm KO6mm
MH4
NPTH FD2.75mm SM3.15mm KO6mm


RP2040

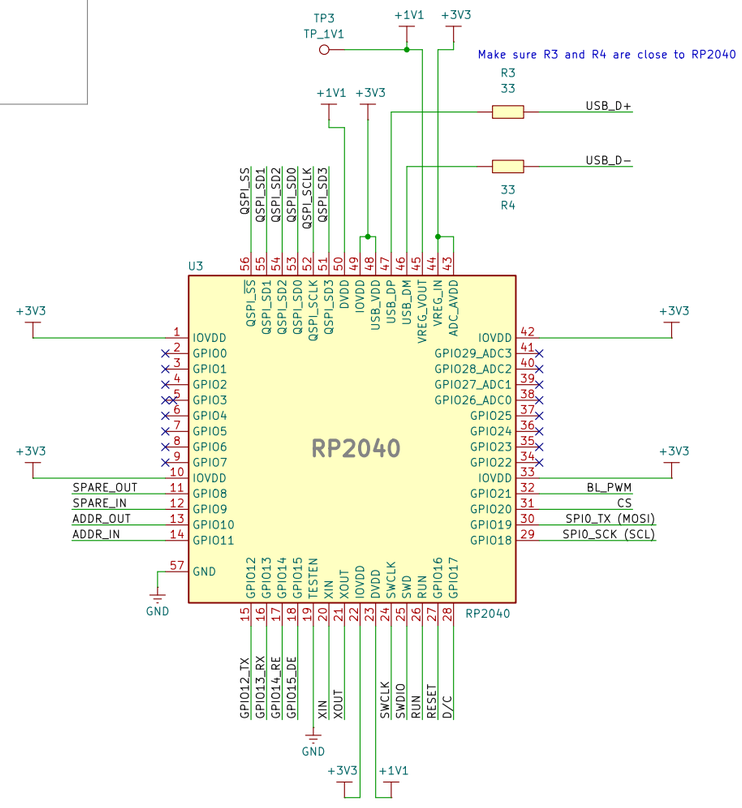


SPI display

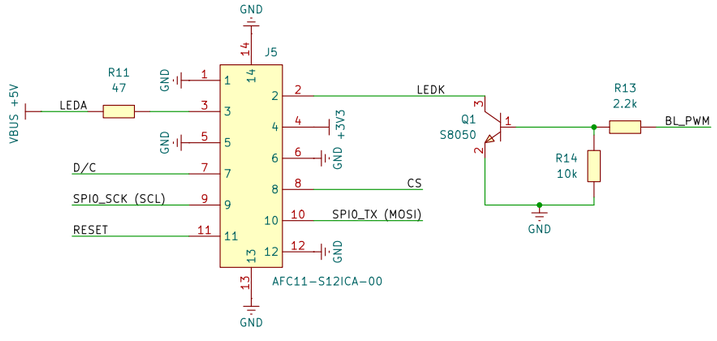


Decoupling capacitors for RP2040

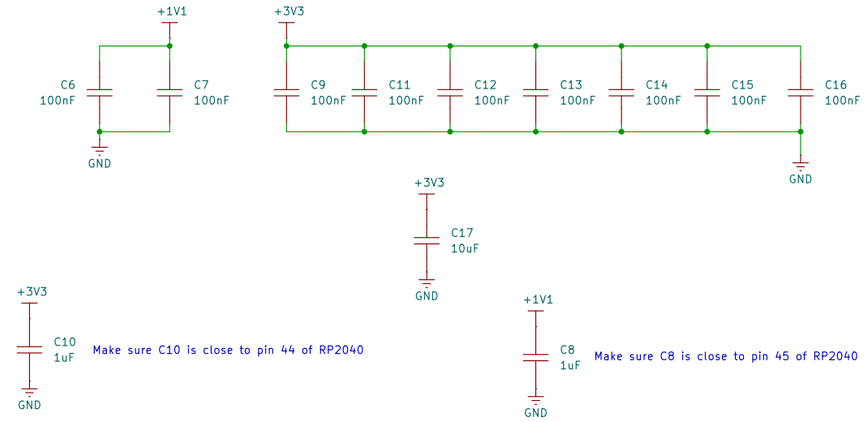

Daisy chain connector

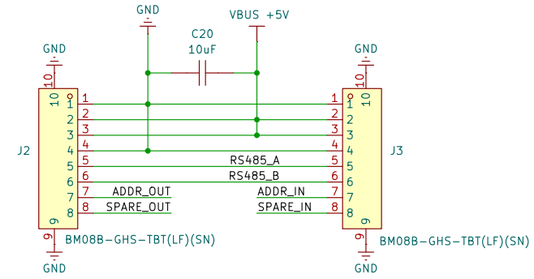

RS485

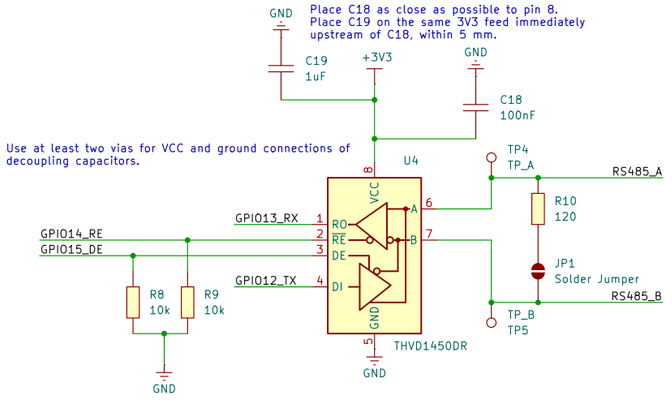

This schematic uses the minimal example from "Hardware design with RP2040"
released by the Raspberry Pi foundation as a reference design.

https://pip-assets.raspberrypi.com/categories/814-rp2040/documents/RP-008279-DS-2-hardware-design-with-rp2040.pdf

Title: Digital Clock 72 Node PCB			
Size: A3	Date: 2026-09-11	Author: Marino Zwyssig	Rev: