


(a) Detecting amplitude, fixed $s = 2$

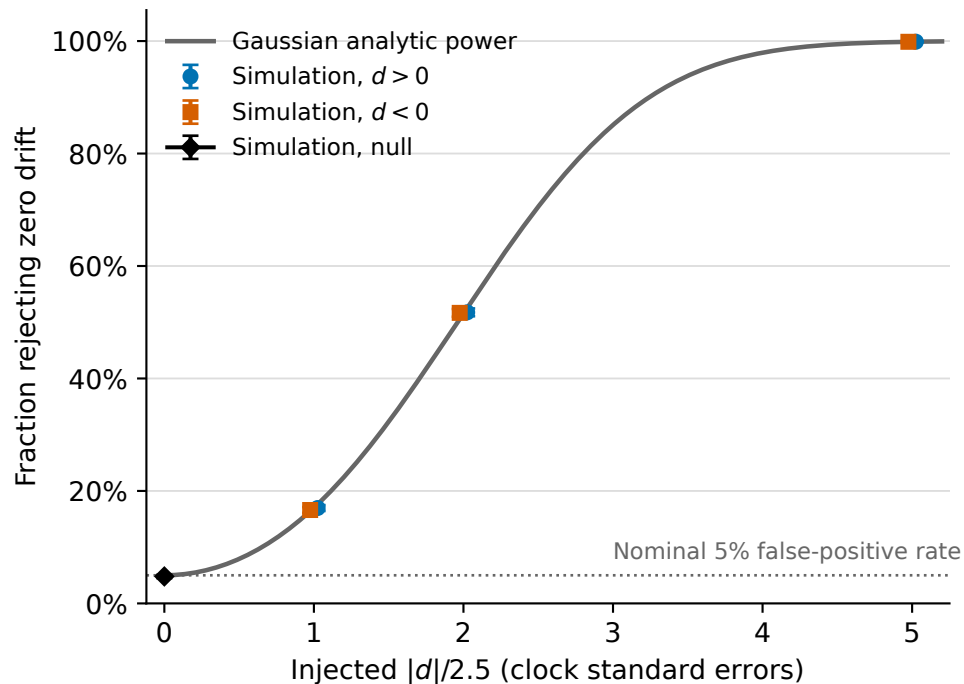

Synthetic data at the current observing design; 20,000 repetitions per injection. King: 293 measurements, with two instrument offsets.

Bars in (a): approximate 95% Monte Carlo uncertainty; signs are slightly displaced horizontally. Measured means are not used.

$d = D_0/(10^{-19} \text{ yr}^{-1})$. Detecting drift does not establish its time dependence.

(b) Drift precision, fixed $s = 2$

