

D

D

C


C

B

B

A

A

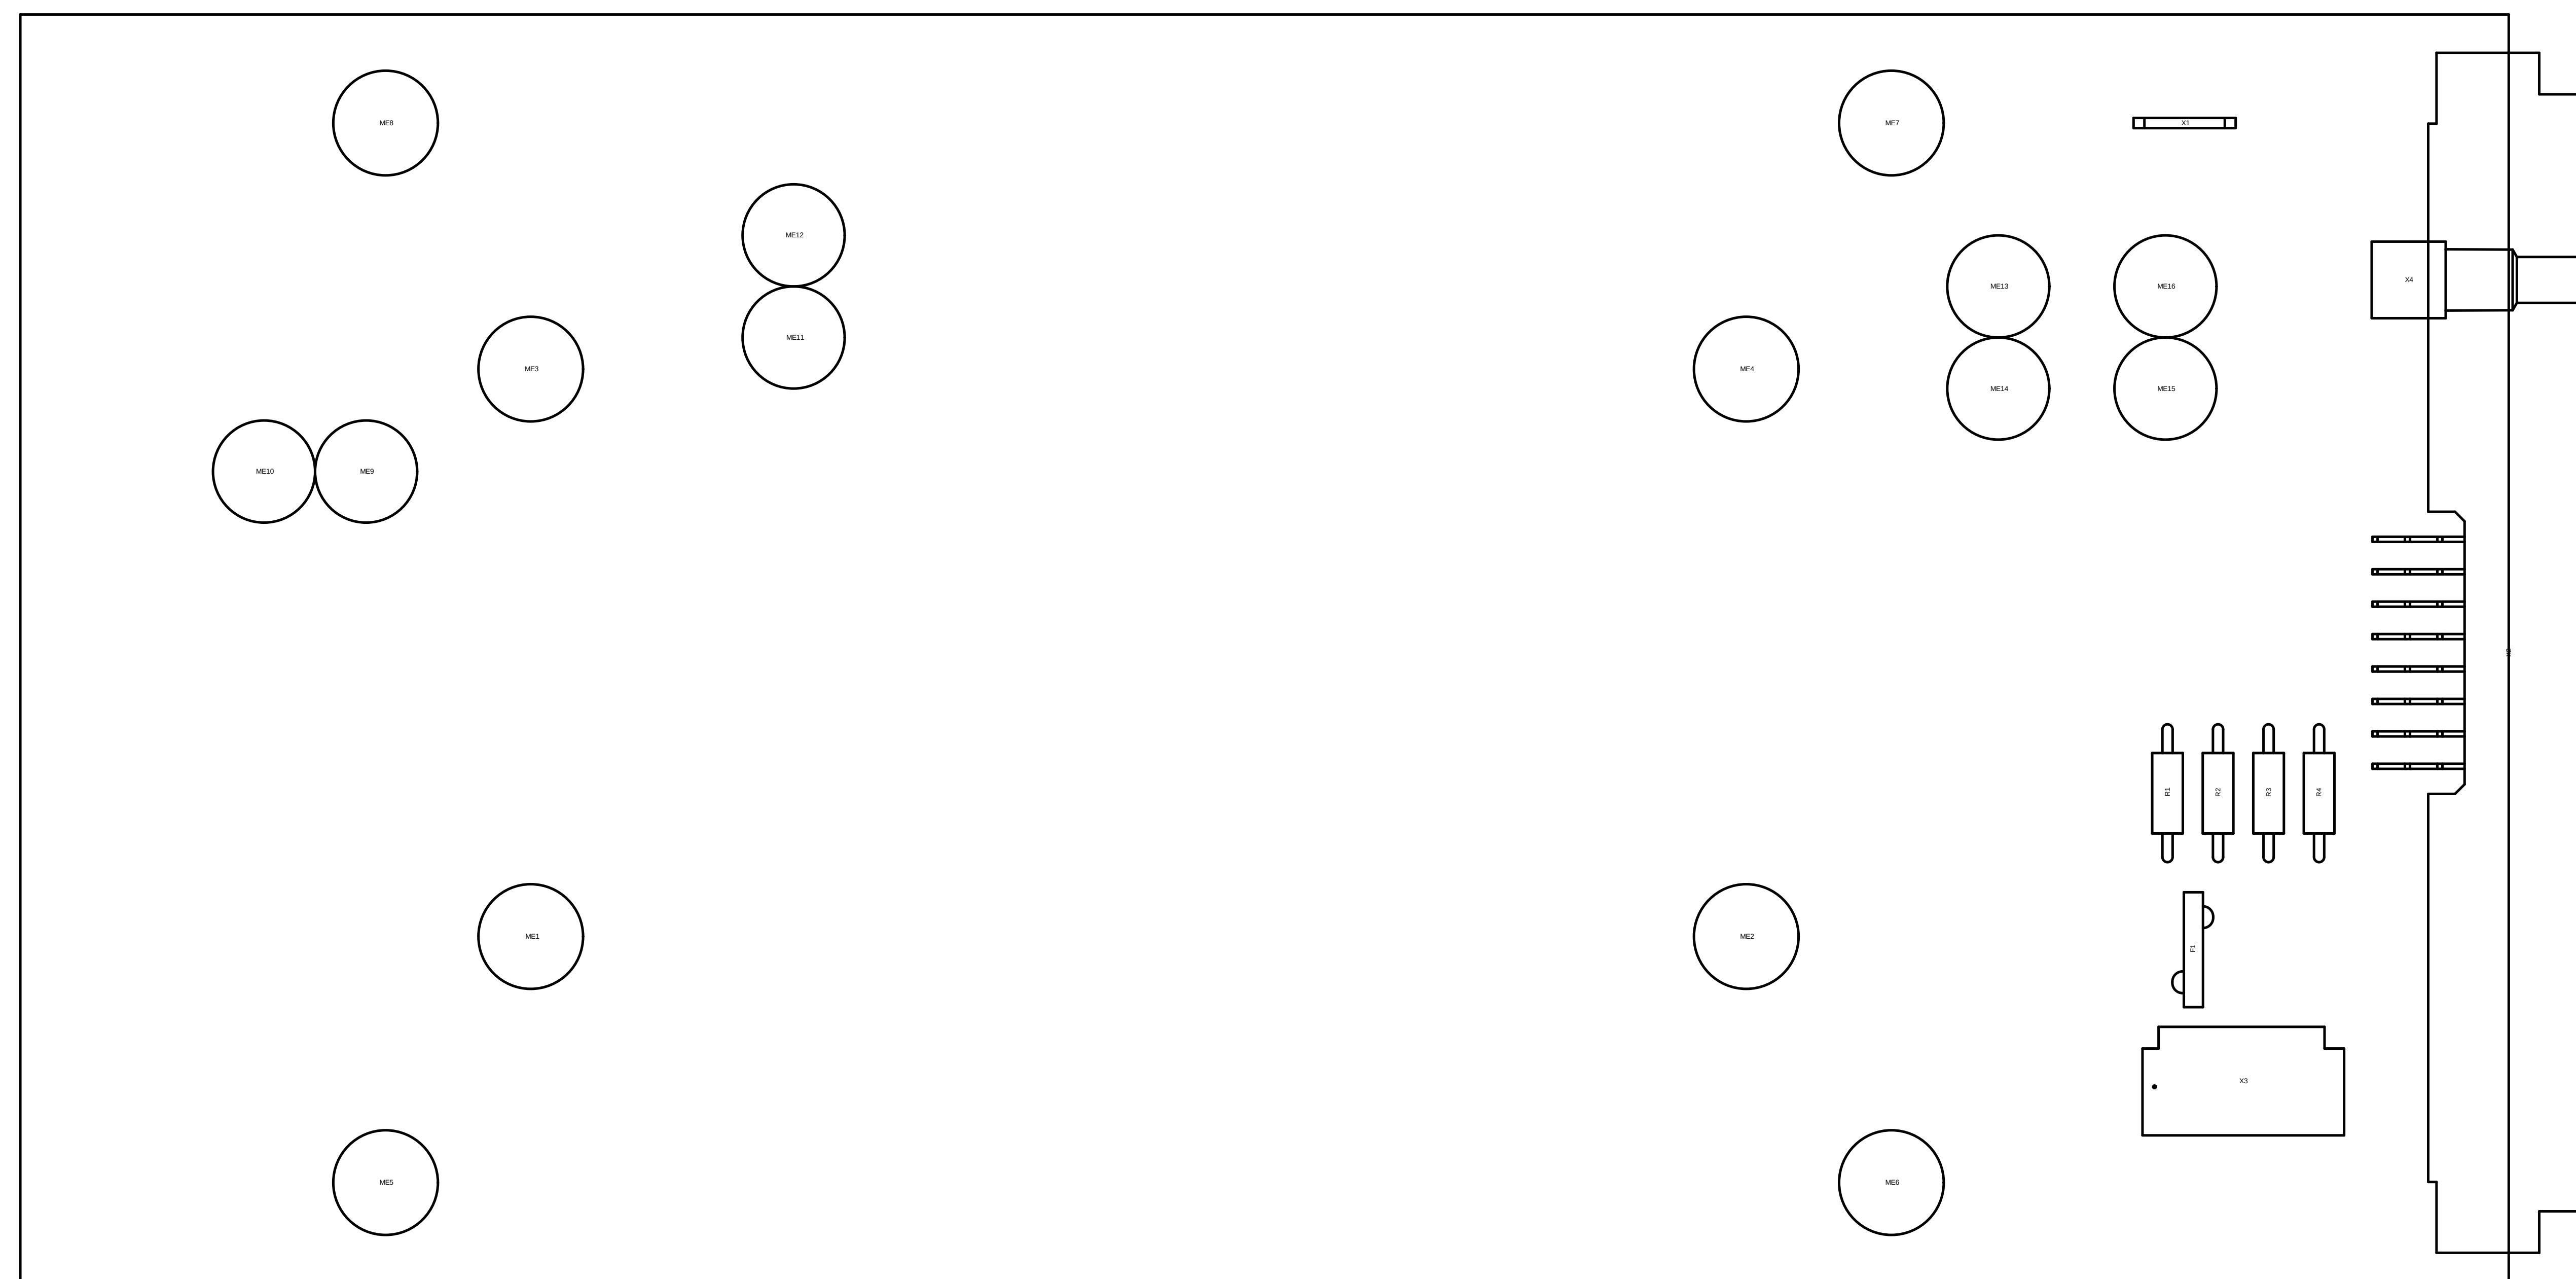

VIEW: Top DRILLS: Specified values are final diameters VIALS: Sharp outer edges, burr-free E-TEST: Yes SMD TAGS: No Plugged Vias DRILLS: 63 HOLE TOLERANCE: $\pm 0.5 \text{ mm} \pm 0.1$ TOLERANCE (GENERAL): $\pm 0.1 \text{ mm} \pm 0.1$ TOLERANCE (GENERAL): $\pm 0.1 \text{ mm} \pm 0.1$ DIMTS: $\pm 0.1 \text{ mm} \pm 0.1$ Application Bulk Number: AD 24.7.2.38 DIRECTIVES: • RoHS Directive 2011/65/EU • REACH Directive (EC) No 1907/2006 • IPC-A600 Acceptability of Printed Boards Spec. • IPC-D-360 Permeability and Resistance Spec. • Permanent Solder Mask NOTE: PCB = Soldermask must not exceed specified thickness (± 0.15) Soldermask free pad areas must not be printed on. (c) Graf Elektronik GmbH 2024 The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.		LAYERS: 2ML MATERIAL: FR4 MATERIAL TEG: L450 THICKNESS: 1.6 mm COPPER: 35 μm SURFACE: Matte Ni/Au SOLDER MASK: Top & Bottom Green SOLDER MASK MATERIAL: HASLEAD 9000 MARKING: PRINT COLOR: None IPC-A600 Class 2 UL 94 V0 FLAMMABILITY: None ADDITIONAL INFO: . PCB-TAG: In bottom Soldermask UL-Mark UL-Number Qualification and Performance Certificate if possible lay must not expose copper Graf Elektronik GmbH In Steinen 5 6850 Dornbirn / Austria Tel +43 (0) 5572 / 9020-0 www.grafelektronik.com		PCB DESIGNER AnMa APPROVED AnMa	TITLE MNP Powersupply Standard Bestueckungsplan/Assembly Drawing Top
* DRAILL: Assy Print Top * Gfx: Mechanical		DATE 28.10.2024 FILENAME Powersupply.PcbDoc	ORGANISATION Graf Elektronik GmbH REVISION 1.0 SCALE SCALE: 1.00		

