



Drive emulator and disk controller  
can be attached to either of J1 or J2

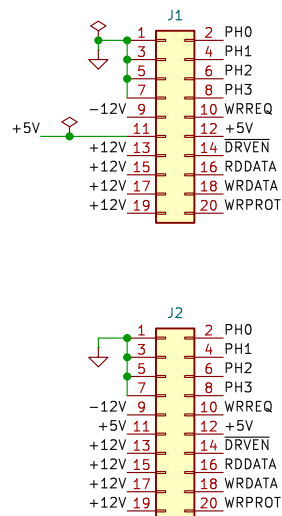

**\*\*NOTE\*\*:** Use of **RESET** as a GPIO means that the programmer  
used must support high-voltage serial programming.

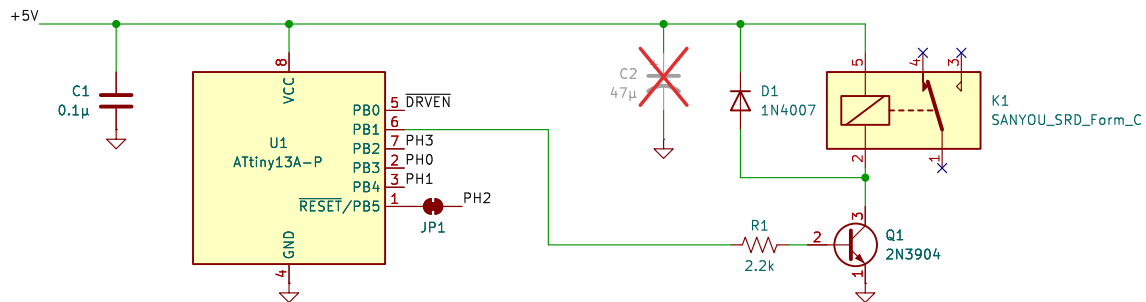

Apple II disk noise maker  
github.com/markadev/AppleII-Disk-Clacker  
Copyright (C) 2025 Mark Aikens  
Licensed under CERN-OHL-P V2.0 ([https://ohwr.org/cern\\_ohl\\_p\\_v2.txt](https://ohwr.org/cern_ohl_p_v2.txt))

Sheet: /  
File: AppleII-Disk-Clacker.kicad\_sch

**Title: Apple II Disk Clacker**

Size: A4 Date: 2025-09-11

KiCad E.D.A. 9.0.4

Rev: A

Id: 1/1