



Drive emulator and disk controller
can be attached to either of J1 or J2

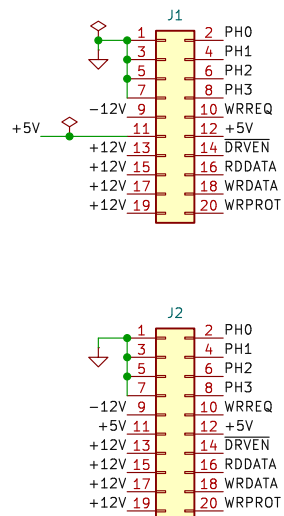

****NOTE**:** Use of **RESET** as a GPIO means that the programmer used must support high-voltage serial programming.

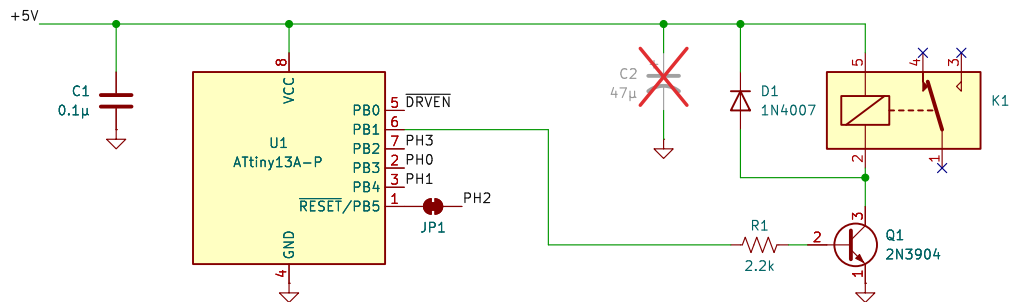

Apple II disk noise maker github.com/markadev/AppleII-Disk-Clacker Copyright (C) 2025 Mark Aikens Licensed under CERN-OHL-P V2.0 (https://ohwr.org/cern_ohl_p_v2.txt)		
Sheet: / File: AppleII-Disk-Clacker.kicad_sch		
Title: Apple II Disk Clacker		
Size: A4	Date: 2025-09-11	Rev: A
KiCad E.D.A. 9.0.4	Id: 1/1	