


| Title | | |
|-------|--|----------|
| Size | Number | Revision |
| B | | |
| Date: | 1/6/2021 | Sheet of |
| File: | D:\Circuits\TriangleGeneratorHammond\TriangleGeneratorSchDoc | |

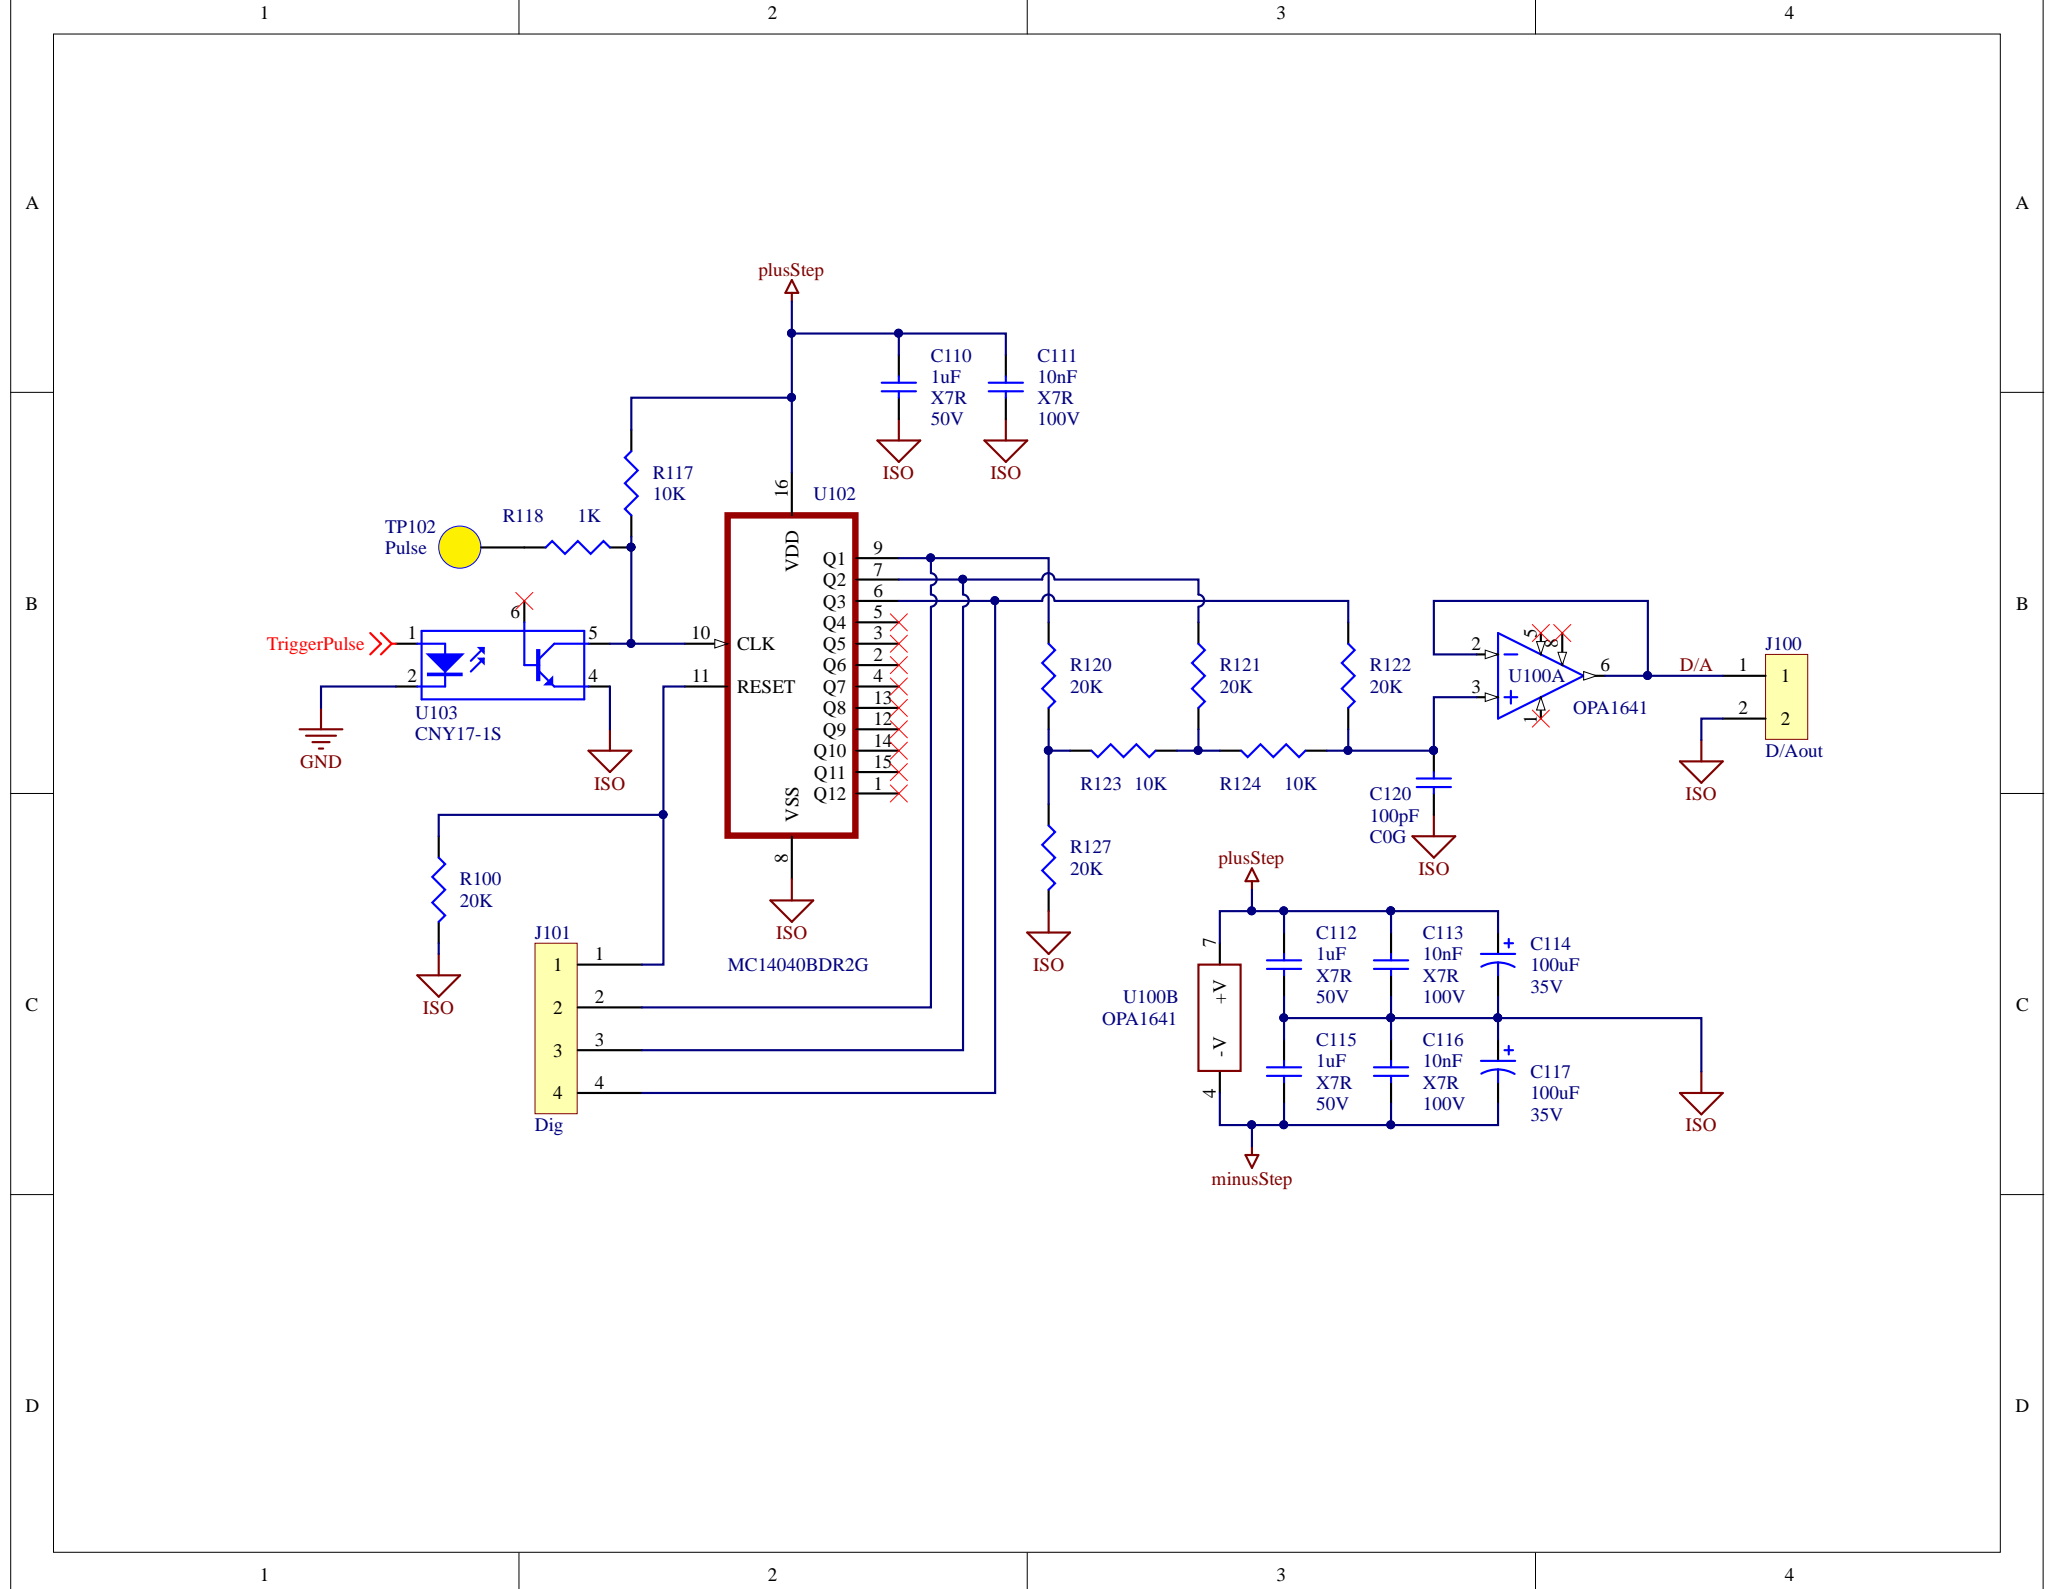


| 1 | | 2 | | 3 | | 4 | |
|---|--|---|--|---|--|---|--|
| A | | | | | | | |
| B | | | | | | | |
| C | | | | | | | |
| D | | | | | | | |

The step supply is completely isolated from all other power supply terminals.

The ISO nomenclature is used on the reference terminal to indicate that the supply reference is isolated from the other circuit ground.

ISO is connected to the CS- supply for NPN (N Ch) transistors or the PNP (P Ch) transistor collector/drain terminal.

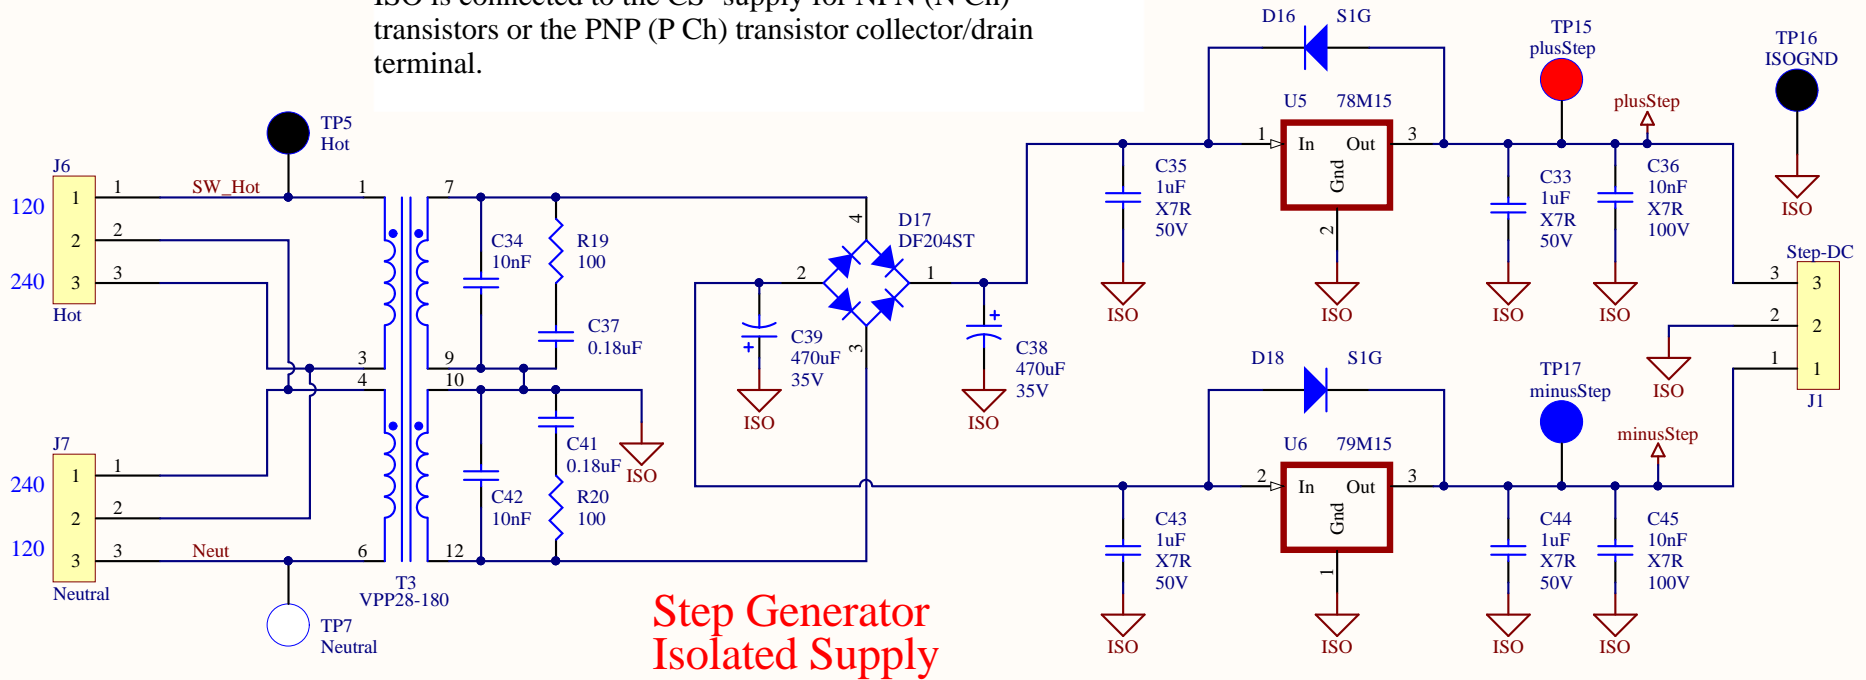

| Title | | |
|-------|--|----------|
| Size | Number | Revision |
| A | | |
| Date: | 1/6/2021 | Sheet of |
| File: | D:\Circuits\...\Isolated Power Supplies Rev 1.0.docx | |

