


# VueTek® Prime Datasheet

Madico's Transparent Backsheets for Bifacial Modules and BIPV

## MATERIAL COMPOSITION

TEST:	
Thickness*	255 µm
Width Range	25-1700 mm
Weight	310 g/m <sup>2</sup>
Density	1.18 g/cm <sup>3</sup>
Coating Color (air side)	Clear
EVA Color Options (cell side)	Clear

FLUOROPOLYMER COATING/PET/EVA

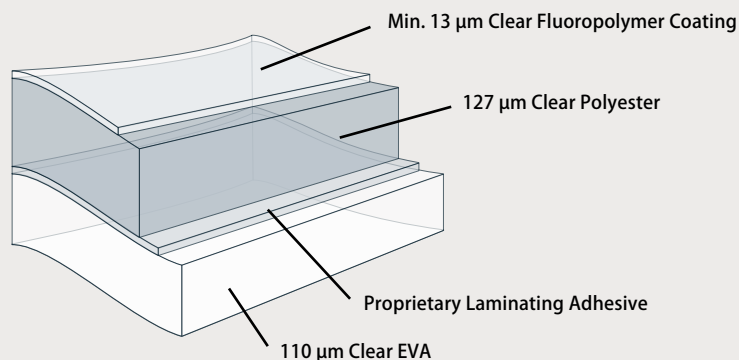

## TECHNICAL CHARACTERISTICS

TEST:	TEST SPECIFICATION(S):	RESULTS:
Tensile Strength at Break (MD)	Internal Testing – Data Available	126 MPa (MD) / 133 MPa (TD)
Elongation at Break (MD)	Internal Testing – Data Available	150% (MD) / 90% (TD)
Dimensional Stability	150°C for 30 min; Internal Testing – Data Available	≤ 1%
EVA Peel Strength from Encapsulant	Internal Testing – Data Available	≥ 40 N/cm
Peel Strength of Layers	PET / EVA	≥ 5 N/cm
Relative Thermal Index (RTI)	Suitable for continuous use at 105°C	125°C

## WEATHERABILITY TESTING PERFORMANCE

TEST:	TEST SPECIFICATION(S):	RESULTS:
Damp Heat Testing	85°C, 85% RH; IEC 61215	≥ 1000 Hours
Heat Freeze Humidity	UL 1703; >10 cycles	>70% of initial mechanical properties retained
UV Stability	UL 746C	≥ 2000 Hours
MVTR	ASTM F1249	≤ 2.5 g/m <sup>2</sup> per day

## ELECTRICAL INSULATION TESTING PERFORMANCE

TEST:	TEST SPECIFICATION(S):	RESULTS:
Partial Discharge	IEC-60664, IEC-61730	≥ 1000 VDC

## OPTICAL CLARITY TESTING PERFORMANCE

TEST:	TEST SPECIFICATION(S):	RESULTS:
Visible Light Transmission (VLT)	400 nm-1200 nm; BYK Gardner HazeGuard plus	≥ 90%
Haze	BYK Gardner HazeGuard plus	7% - 12%

\*Theoretical nominal

This product is covered by one or more U.S. patents and pending U.S. and other patent applications. Please see [www.madico.com/patents](http://www.madico.com/patents) Typical Data – Not Specification © 2014 Madico, Inc.

Madico PhotoVoltaic Backsheets  
64 Industrial Parkway  
Woburn MA, 01801  
USA

Phone: 1-800-633-0140  
Fax: 1-781-935-6841  
Email: [InfoSF@madico.com](mailto:InfoSF@madico.com)  
[www.madicopv.com](http://www.madicopv.com)

© 2016 Madico, Inc. PV0018 1/16

**MADICO**  
PV BACKSHEETS