
VueTekTM Datasheet

Transparent Backsheets for Bi-Facial and BIPV panel designs

MATERIAL COMPOSITION

TEST:	
Thickness*	255 μm
Width Range	25-1700 mm
Weight	310 g/m ²
Density	1.18 g/cm ³
Coating Color	Clear
EVA Color	Clear
	FLUOROPOLYMER COATING/PET/EVA

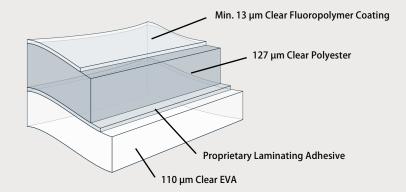

TECHNICAL CHARACTERISTICS

TEST:	TEST SPECIFICATION(S):	RESULTS:
Tensile Strength at Break (MD)	Internal Testing – Data Available	100 MPa (MD)
Elongation at Break (MD)	Internal Testing – Data Available	140% (MD)
Dimensional Stability	150°C for 30 min; Internal Testing – Data Available	≤ 1.7%
EVA Peel Strength from Encapsulant	Internal Testing – Data Available	≥ 40 N/cm
Peel Strength of Layers	PET / EVA	≥ 5 N/cm
Relative Thermal Index (RTI)	Suitable for use at continuous 85°C	105°C

WEATHERABILITY TESTING PERFORMANCE

TEST:	TEST SPECIFICATION(S):	RESULTS:
Damp Heat Testing	85°C, 85% RH; IEC 61215	≥ 1000 Hours
Heat Freeze Humidity	UL 1703; >10 cycles	>70% of initial mechanical properties retained
UV Stability	UL 746C; 2500 hours	≥ 2000 Hours
MVTR	ASTM F1249	≤ 2.5 g/m² per day

ELECTRICAL INSULATION TESTING PERFORMANCE

TEST:	TEST SPECIFICATION(S):	RESULTS:
Partial Discharge	IEC-60664, IEC-61730	>1000 VDC
Dielectric Strength	ASTM D149	18 kV
Comparative Tracking Index (CTI)	IEC 60112	600 Volts

FLAME RESISTANCE TESTING PERFORMANCE

TEST:	TEST SPECIFICATION(S):	RESULTS:
Flame Spread Index	ASTM E162	85
High-current Arc Ignition (HAI)	UL746A	PLC 1

OPTICAL CLARITY TESTING PERFORMANCE

TEST:	TEST SPECIFICATION(S):	RESULTS:
Visible Light Transmission (VLT)	400 nm-1200 nm; BYK Gardner HazeGuard plus	≥ 90%
Haze	BYK Gardner HazeGuard plus	7% - 12%

^{*}Theoretical nominal

This product is covered by one or more U.S. patents and pending U.S. and other patent applications. Please see www.madico.com/patents Typical Data – Not Specification © 2014 Madico, Inc.

Madico PhotoVoltaic Backsheets 64 Industrial Parkway Woburn MA, 01801 USA Phone: 1-800-633-0140 Fax: 1-781-935-6841 Email: InfoSF@madico.com www.madicopv.com

