12BH7 is A.F. Double Triode



Quick reference data

- Anode current I_a=11,5mA
- Transcoductance S=3,1mA/V
- Amplification μ=16,5

Heating


Heating is indirect by AC or DC, with serial or parallel supply.

Heater voltage	V_f	6,3	12,6	(V)
Heater current	I_f	0,6	0,3	(A)

Telephone: +381 18 550 741
FAX: +381 18 550 806
Postal address: Bul. Sv. Cara Konstantina 80-86, 18000 Nis, Yugoslavia
Electronic mail: eirc@eierc.com
Web site: http://www.eierc.com/rc

Dimensions and connections

Base: Noval

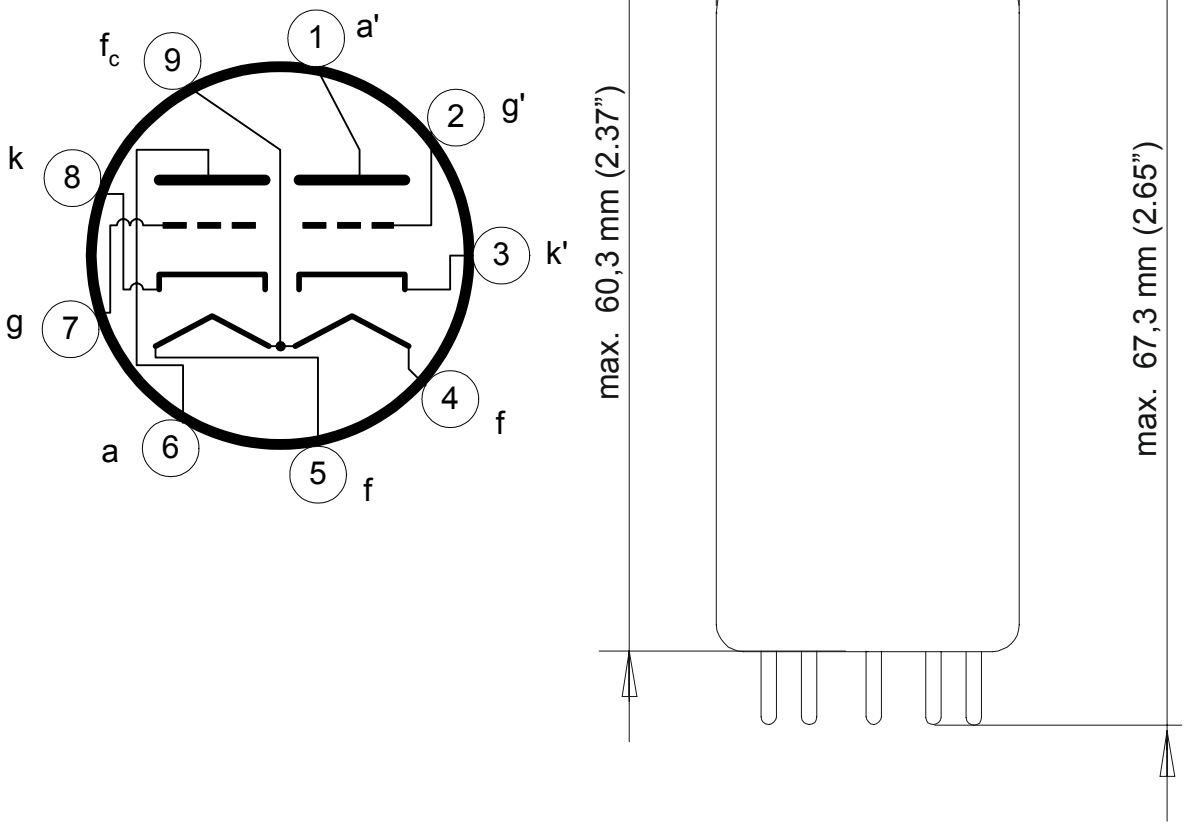

Telephone: +381 18 550 741
FAX: +381 18 550 806
Postal address: Bul. Sv. Cara Konstantina 80-86, 18000 Nis, Yugoslavia
Electronic mail: eirc@eierc.com
Web site: http://www.eierc.com/rc

Typical characteristics and operating conditions

			Class A1 amplifier	Vertical deflection amplifier	
Anode voltage		V_a	250	350	(V)
Grid voltage		V_g	-10,5		(V)
Anode current		I_a	11,5	16	(mA)
Transconductance		S	3,1	3,1	(mA/V)
Amplification		μ	16,5	16,5	
Anode resistance (approx.)		R_a	5,3		(kΩ)
Cathode bias resistor		R_k		560	(kΩ)
Grid input voltage	Peak to peak sawtooth component	V_{pp}		25	(V)
	Negative peak component	V_p		32	
Anode output voltage	Peak positive pulse component	V_p		670	(V)
	Peak to peak sawtooth component	V_{pp}		230	


Maximum ratings

		Class A1 amplifier	Vertical deflection amplifier	
Anode voltage	V_a	300	450	(V)
Peak positive plate voltage			1500	(V)
Anode dissipation (each section)	W_a	3,5	3,5	(W)
Peak negative pulse grid voltage			250	(V)

Telephone: +381 18 550 741
FAX: +381 18 550 806
Postal address: Bul. Sv. Cara Konstantina 80-86, 18000 Nis, Yugoslavia
Electronic mail: eirc@eierc.com
Web site: http://www.eierc.com/rc

Average cathode current (each section)			20	20	(mA)
Peak cathode current				70	(mA)
Grid circuit resistance	fixed bias		0,25		(MΩ)
	cathode bias		1	2,2	

Average plate characteristics 12BH7 (each section)

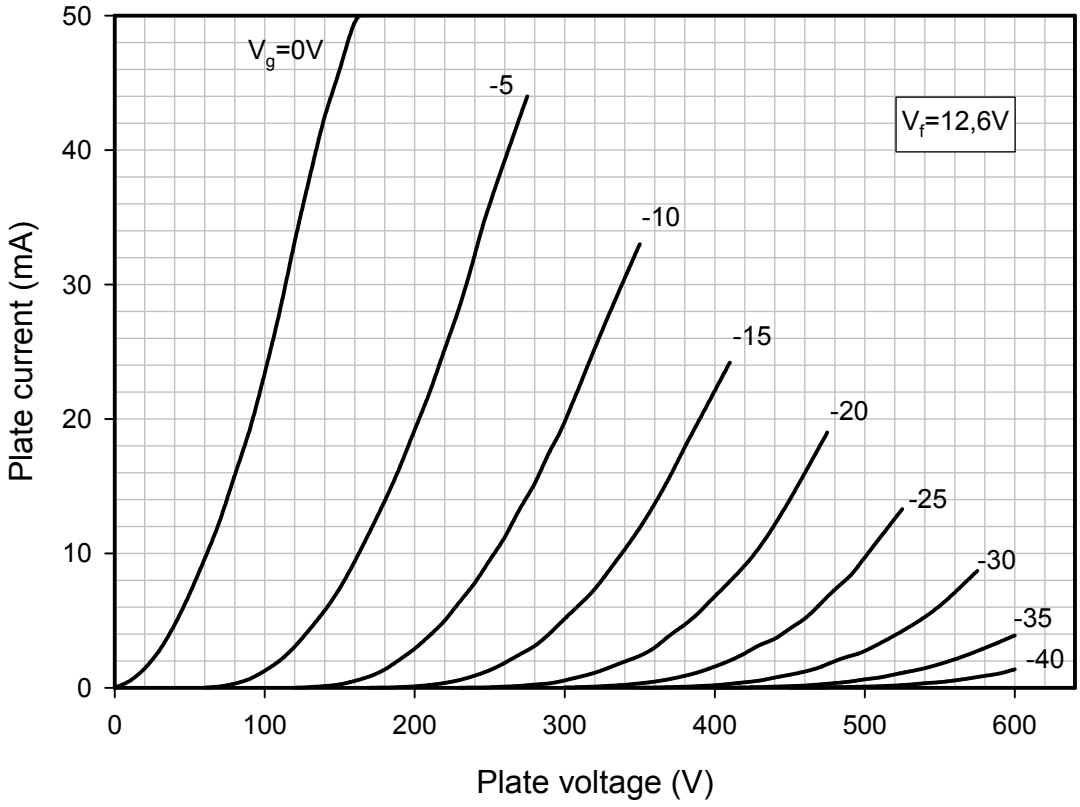

Telephone: +381 18 550 741
FAX: +381 18 550 806
Postal address: Bul. Sv. Cara Konstantina 80-86, 18000 Nis, Yugoslavia
Electronic mail: eirc@eierc.com
Web site: http://www.eierc.com/rc