
TANDEMBOX

Ordering and planning information



www.blum.com

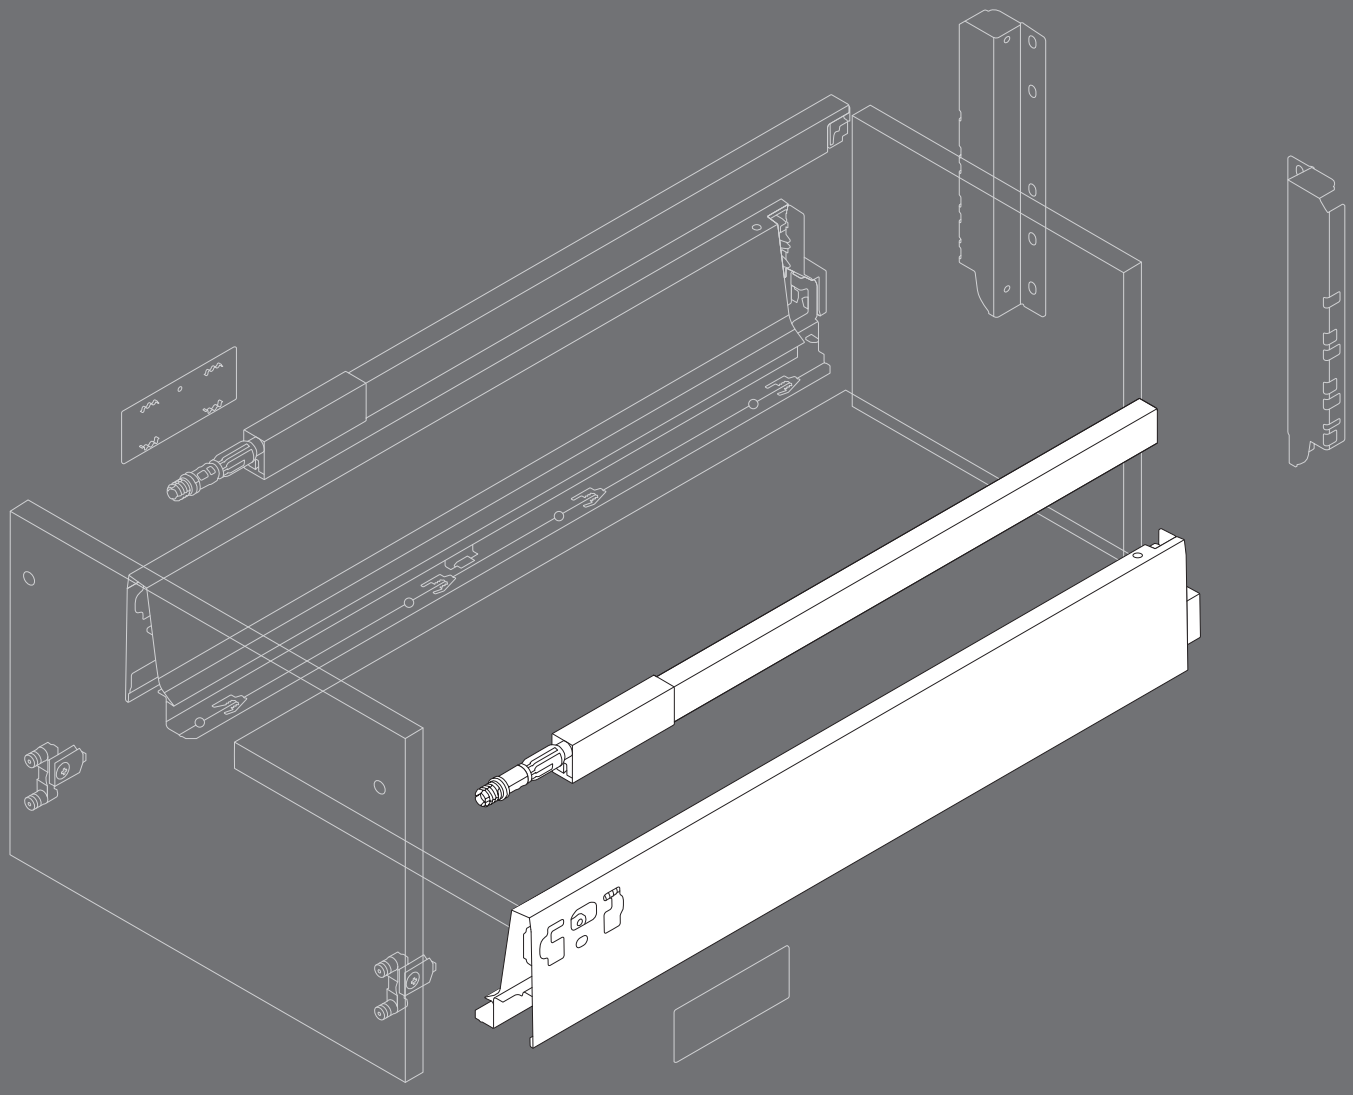

Quality is timeless.

Tried and tested millions of times over and continuously refined over decades, TANDEMBOX is still setting the benchmark for double wall box systems. TANDEMBOX impresses with its high quality, exceptional user convenience and outstanding stability and robustness – not to mention its clean, modern design as well as the versatility and flexibility of the TANDEMBOX range. All this makes TANDEMBOX a compelling solution for a wide range of applications throughout the home to this day.

You'll find everything you need to know about ordering TANDEMBOX in this brochure. If you have any questions, please contact your Blum representative who will be happy to assist.

Efficiency across all operations

To ensure you receive the best possible support for your workflows, we offer more than just specialised assembly devices. Our digital services are also available to make planning and ordering significantly easier. With our Cabinet and Product Configurators, you can plan TANDEMBOX to satisfy the requirements of your project and generate a complete, verified parts list, which you can send to your distributor at the touch of a button. Naturally, we also provide all the manufacturing data you need. You can transfer the data to your CAD software, and from there to the CNC machine. The result is a seamless, digital workflow that helps prevent errors and saves you a great deal of time.



Standard cabinet

Drawer

	TANDEMBOX – Drawer – N	6
	TANDEMBOX – Drawer – M	8
	TANDEMBOX – Drawer – C – rectangular gallery	14
	TANDEMBOX – Drawer – D – rectangular gallery	20
	TANDEMBOX – Drawer – C – aluminium frame	26
	TANDEMBOX – Drawer – D – aluminium frame	28

Inner drawer

	TANDEMBOX – Inner drawer – M	10
	TANDEMBOX – Inner drawer – C – rectangular gallery	16
	TANDEMBOX – Inner drawer – D – rectangular gallery	22

Sink cabinet

Drawer

	TANDEMBOX – Sink drawer – M	30
	TANDEMBOX – Sink drawer – C – centre piece	32
	TANDEMBOX – Sink drawer – D – centre piece	36

Narrow cabinet

	TANDEMBOX – SPACE TWIN	40

Plinth solution

	TANDEMBOX – SPACE STEP	42

Further information

Accessories	46
Cabinet profile fixing	49
SERVO-DRIVE for TANDEMBOX	50
TIP-ON BLUMOTION for TANDEMBOX	51
Assembly devices	55

Colour range


Name	
SW	Silk white

TANDEMBOX – Drawer – N



- Concealed, guided full extension
- Tool-free front assembly
- 2-dimensional front adjustment
- Includes integrated BLUMOTION for soft and effortless closing; can be combined with the SERVO-DRIVE electronic opening support system
- Alternatively compatible with the TIP-ON BLUMOTION mechanical opening support system for handle-less furniture, or even for furniture with handles as a design feature

Space requirement

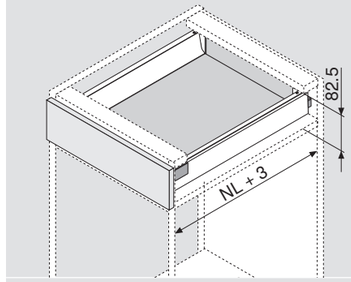


NL Nominal length

Ordering information

1	Cabinet profiles left/right		
	BLUMOTION *	Dynamic carrying capacity (kg)	
	Nominal length NL (mm)	30	
	400	578.4001M	
	450	578.4501M	
	500	578.5001M	
	550	578.5501M	

* Suitable for SERVO-DRIVE and TIP-ON BLUMOTION

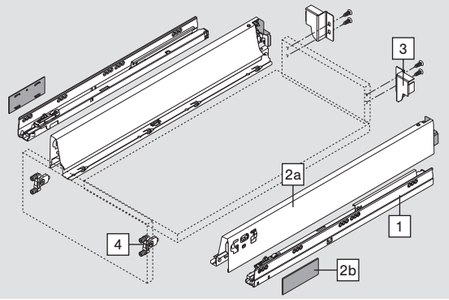

2	Drawer side set		
	Drawer side height (mm)	67	
	Nominal length NL (mm)		SW
	400		378N4002SA
	450		378N4502SA
	500		378N5002SA
	550		378N5502SA
Consisting of:			
2a	1 x	Drawer sides left/right	
2b	2 x	Cover caps, stamped with Blum logo, custom printed from 1,000 pcs	


3	Chipboard back fixing left/right	
	Material	SW
	Steel	Z30N000S.04

4	Front fixing bracket		
	Fixing method		
	INSERTA	2 x	ZSF.39A2
	Screw-on	2 x	ZSF.35A2


TANDEMBOX – Drawer – N

Planning

Space requirement in the cabinet




Installation dimensions – front – screw-on assembly




FA Front overlay


Drilling distances – front – INSERTA | knock-in assembly




Installation dimensions – back



Cutting – 16 mm chipboard



Chipboard back	B (mm)
Height	69
Drawer base	**A (mm)**
Chipboard back	NL - 24




KB Cabinet width
LW Internal cabinet width
NL Nominal length

TANDEMBOX – Drawer – M



- Concealed, guided full extension
- Tool-free front assembly
- 2-dimensional front adjustment
- Includes integrated BLUMOTION for soft and effortless closing; can be combined with the SERVO-DRIVE electronic opening support system
- Alternatively compatible with the TIP-ON BLUMOTION mechanical opening support system for handle-less furniture, or even for furniture with handles as a design feature

Space requirement




NL Nominal length

Ordering information

1	Cabinet profiles left/right		
	BLUMOTION *	Dynamic carrying capacity (kg)	
	Nominal length NL (mm)	30	65
	270	578.2701M	
	350	578.3501M	
	400	578.4001M	
	450	578.4501M	576.4501M
	500	578.5001M	576.5001M
	550	578.5501M	576.5501M
	650		576.6501M

* Suitable for SERVO-DRIVE and TIP-ON BLUMOTION

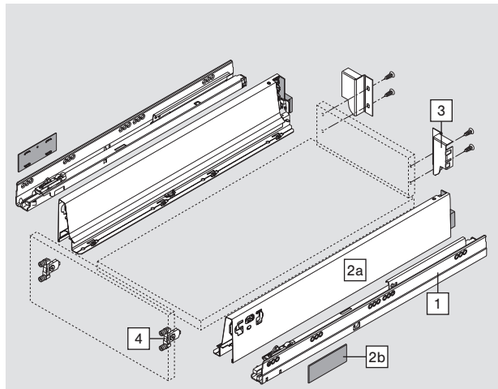

2	Drawer side set	
	Drawer side height (mm)	83.6
	Nominal length NL (mm)	SW
	270	378M2702SA
	350	378M3502SA
	400	378M4002SA
	450	378M4502SA
	500	378M5002SA
	550	378M5502SA
	650	378M6502SA
Consisting of:		
2a	1 x	Drawer sides left/right
2b	2 x	Cover caps, stamped with Blum logo, custom printed from 1,000 pcs

3	Chipboard back fixing left/right	
	Material	SW
	Steel	Z30M000S.04


TANDEMBOX – Drawer – M

Ordering information


4	Front fixing bracket		
	Fixing method		
	INSERTA	2 x	ZSF.39A2
	Screw-on	2 x	ZSF.35A2

Planning

Space requirement in the cabinet




Installation dimensions – front – screw-on assembly




FA Front overlay


Drilling distances – front – INSERTA | knock-in assembly




Installation dimensions – back



Cutting – 16 mm chipboard



Chipboard back	B (mm)
Height	84
Drawer base	**A (mm)**
Chipboard back	NL - 24



KB Cabinet width

LW Internal cabinet width


NL Nominal length

TANDEMBOX – Inner drawer – M



- Concealed, guided full extension
- Tool-free front assembly
- Includes integrated BLUMOTION for soft and effortless closing; can be combined with the SERVO-DRIVE electronic opening support system
- Alternatively compatible with the TIP-ON BLUMOTION mechanical opening support system for handle-less furniture, or even for furniture with handles as a design feature
- Inner drawer either with handle or handle and latch

Space requirement



NL Nominal length


* Min space requirement for inner drawer with or without handle

** Inner drawer with easy access from above

Ordering information

1	Cabinet profiles left/right		
	BLUMOTION *	Dynamic carrying capacity (kg)	
	Nominal length NL (mm)	30	65
	270	578.2701M	
	350	578.3501M	
	400	578.4001M	
	450	578.4501M	576.4501M
	500	578.5001M	576.5001M
	550	578.5501M	576.5501M
	650		576.6501M

* Suitable for SERVO-DRIVE and TIP-ON BLUMOTION

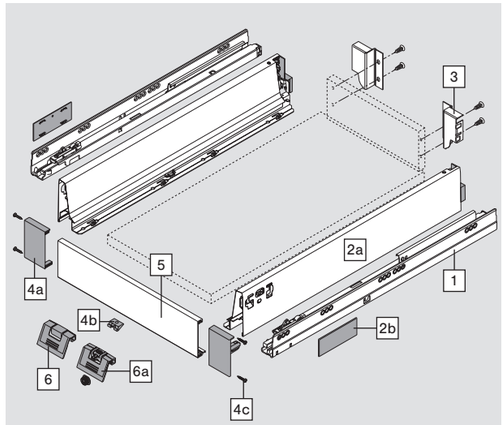

2	Drawer side set	
	Drawer side height (mm)	83.6
	Nominal length NL (mm)	SW
	270	378M2702SA
	350	378M3502SA
	400	378M4002SA
	450	378M4502SA
	500	378M5002SA
	550	378M5502SA
	650	378M6502SA

Consisting of:		
2a	1 x	Drawer sides left/right
2b	2 x	Cover caps, stamped with Blum logo, custom printed from 1,000 pcs

3	Chipboard back fixing left/right	
	Material	SW
	Steel	Z30M000S.04

TANDEMBOX – Inner drawer – M

Ordering information

4	Front fixing set	
	Material	SW
	Nylon	ZIF.71M0

Consisting of:		
4a	1 x	Front fixing left/right
4b	1 x	Locking piece – Z31A0008
4c	4 x	Screws

5	Front piece without groove		
	Material	Length (mm)	SW
	Aluminium	1036	Z31L1036A
Cutting	Internal cabinet width LW - 132 mm		

Accessories

6	Handle	
	Material	SW
	Nylon	ZIF.80M5

Alternative to 6


6a	Handle and latch*	
	Material	SW
	Nylon	ZIF.80M7

* Not compatible with TIP-ON BLUMOTION

TANDEMBOX – Inner drawer – M

Planning


Space requirement in the cabinet




* Min space requirement for inner drawer with or without handle
Without a handle, opening is only possible from the bottom

** Inner drawer with easy access from above


Installation dimensions – back




Drilling distances – front – latch



Cutting – 16 mm chipboard



Chipboard back	B (mm)
Height	84
Drawer base	**A (mm)**
Chipboard back	NL - 24




KB Cabinet width
LW Internal cabinet width
NL Nominal length

TANDEMBOX – Inner drawer – M

Planning

Front piece for cutting to size

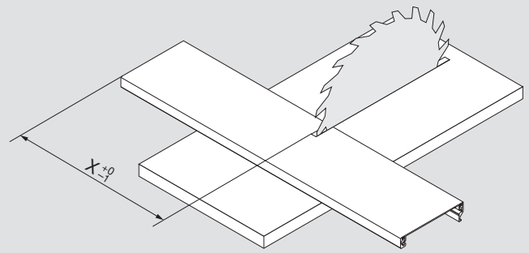


X = LW - 132
LW Internal cabinet width

TANDEMBOX – Drawer – C – rectangular gallery



- Concealed, guided full extension
- Tool-free front assembly
- 3-dimensional front adjustment
- Includes integrated BLUMOTION for soft and effortless closing; can be combined with the SERVO-DRIVE electronic opening support system
- Alternatively compatible with the TIP-ON BLUMOTION mechanical opening support system for handle-less furniture, or even for furniture with handles as a design feature

Space requirement



NL Nominal length


Ordering information

1 Cabinet profiles left/right



BLUMOTION * Nominal length NL (mm)	Dynamic carrying capacity (kg) 30	65
270	578.2701M	
350	578.3501M	
400	578.4001M	
450	578.4501M	576.4501M
500	578.5001M	576.5001M
550	578.5501M	576.5501M
650		576.6501M

* Suitable for SERVO-DRIVE and TIP-ON BLUMOTION

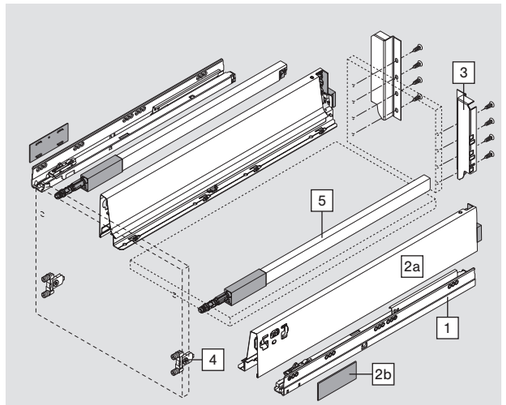

2 Drawer side set



Drawer side height (mm)	83.6

Nominal length NL (mm)	SW
270	378M2702SA
350	378M3502SA
400	378M4002SA
450	378M4502SA
500	378M5002SA
550	378M5502SA
650	378M6502SA

Consisting of:

2a	1 x	Drawer sides left/right
2b	2 x	Cover caps, stamped with Blum logo, custom printed from 1,000 pcs

3 Chipboard back fixing left/right

Material	SW
Steel	Z30C000S

TANDEMBOX – Drawer – C – rectangular gallery

Ordering information

4 Front fixing bracket



Fixing method		
INSERTA	2 x	ZSF.39A2
Screw-on	2 x	ZSF.35A2


5 Longside gallery rail left/right




Material	Nominal length NL (mm)	SW
Steel	270	ZRG.207RSIC
	350	ZRG.287RSIC
	400	ZRG.337RSIC
	450	ZRG.387RSIC
	500	ZRG.437RSIC
	550	ZRG.487RSIC
	650	ZRG.587RSIC

Planning

Space requirement in the cabinet




Installation dimensions – front – screw-on assembly




FA Front overlay


Drilling distances – front – INSERTA | knock-in assembly




Installation dimensions – back



Cutting – 16 mm chipboard



Chipboard back	B (mm)
Height	167
Drawer base	**A (mm)**
Chipboard back	NL - 24



KB Cabinet width

LW Internal cabinet width


NL Nominal length

TANDEMBOX – Inner drawer – C – rectangular gallery



- Concealed, guided full extension
- Tool-free front assembly
- Includes integrated BLUMOTION for soft and effortless closing; can be combined with the SERVO-DRIVE electronic opening support system
- Or with TIP-ON BLUMOTION

Space requirement




NL Nominal length

Ordering information

1	Cabinet profiles left/right		
	BLUMOTION *	Dynamic carrying capacity (kg)	
	Nominal length NL (mm)	30	65
	270	578.2701M	
	350	578.3501M	
	400	578.4001M	
	450	578.4501M	576.4501M
	500	578.5001M	576.5001M
	550	578.5501M	576.5501M
	650		576.6501M

* Suitable for SERVO-DRIVE and TIP-ON BLUMOTION

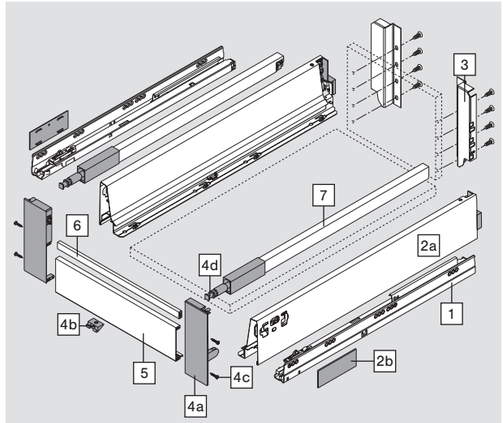

2	Drawer side set	
	Drawer side height (mm)	83.6
	Nominal length NL (mm)	SW
	270	378M2702SA
	350	378M3502SA
	400	378M4002SA
	450	378M4502SA
	500	378M5002SA
	550	378M5502SA
	650	378M6502SA
Consisting of:		
2a	1 x	Drawer sides left/right
2b	2 x	Cover caps, stamped with Blum logo, custom printed from 1,000 pcs

3	Chipboard back fixing left/right	
	Material	SW
	Steel	Z30C000S

TANDEMBOX – Inner drawer – C – rectangular gallery

Ordering information

4	Front fixing set	
	Material	SW
	Nylon	ZIF.76C0
Consisting of:		
4a	1 x	Front fixing left/right
4b	1 x	Locking piece – Z31A0008
4c	4 x	Screws
4d	2 x	Gallery head – ZRG.000R5F

5	Front piece without groove		
	Material	Length (mm)	SW
	Aluminium	1036	Z31L1036A
Cutting	Internal cabinet width LW - 132 mm		


6	Cross gallery		
	Material	Length (mm)	SW
	Aluminium	1046	ZRG.1046Z
Cutting	Internal cabinet width LW - 122 mm		

7	Longside gallery rail left/right		
	Material	Nominal length NL (mm)	SW
	Steel	270	ZRG.207RSIC
		350	ZRG.287RSIC
		400	ZRG.337RSIC
		450	ZRG.387RSIC
		500	ZRG.437RSIC
		550	ZRG.487RSIC
		650	ZRG.587RSIC


TANDEMBOX – Inner drawer – C – rectangular gallery

Planning


Space requirement in the cabinet




Installation dimensions – back



Cutting – 16 mm chipboard



Chipboard back	B (mm)
Height	167
Drawer base	**A (mm)**
Chipboard back	NL - 24



KB Cabinet width


LW Internal cabinet width

NL Nominal length

TANDEMBOX – Inner drawer – C – rectangular gallery

Planning


Front piece for cutting to size

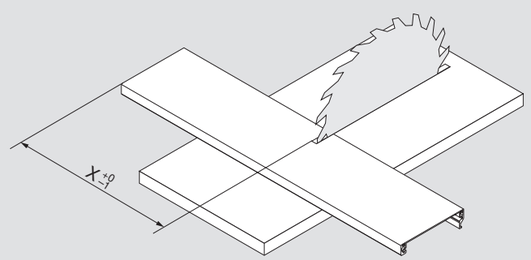

X = LW - 132

LW Internal cabinet width

Front piece for cutting to size

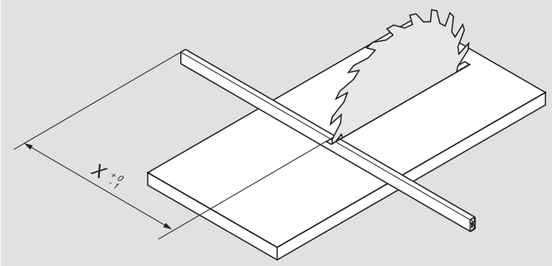

X = LW - 122


LW Internal cabinet width

TANDEMBOX – Drawer – D – rectangular gallery



- Concealed, guided full extension
- Tool-free front assembly
- 3-dimensional front adjustment
- Includes integrated BLUMOTION for soft and effortless closing; can be combined with the SERVO-DRIVE electronic opening support system
- Alternatively compatible with the TIP-ON BLUMOTION mechanical opening support system for handle-less furniture, or even for furniture with handles as a design feature

Space requirement



NL Nominal length


Ordering information

1 Cabinet profiles left/right



BLUMOTION *	Dynamic carrying capacity (kg)	
Nominal length NL (mm)	30	65
270	578.2701M	
350	578.3501M	
400	578.4001M	
450	578.4501M	576.4501M
500	578.5001M	576.5001M
550	578.5501M	576.5501M
650		576.6501M

* Suitable for SERVO-DRIVE and TIP-ON BLUMOTION

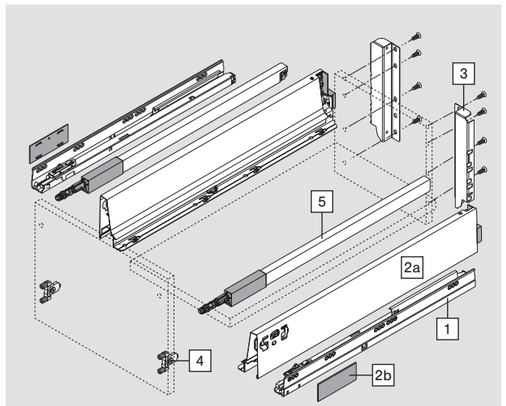

2 Drawer side set



Drawer side height (mm)	83.6
Nominal length NL (mm)	SW
270	378M2702SA
350	378M3502SA
400	378M4002SA
450	378M4502SA
500	378M5002SA
550	378M5502SA
650	378M6502SA

Consisting of:

2a	1 x	Drawer sides left/right
2b	2 x	Cover caps, stamped with Blum logo, custom printed from 1,000 pcs

3 Chipboard back fixing left/right

Material	SW
Steel	Z30D000SL

TANDEMBOX – Drawer – D – rectangular gallery

Ordering information

4 Front fixing bracket



Fixing method		
INSERTA	2 x	ZSF.39A2
Screw-on	2 x	ZSF.35A2


5 Longside gallery rail left/right




Material	Nominal length NL (mm)	SW
Steel	270	ZRG.207RSIC
	350	ZRG.287RSIC
	400	ZRG.337RSIC
	450	ZRG.387RSIC
	500	ZRG.437RSIC
	550	ZRG.487RSIC
	650	ZRG.587RSIC

Planning

Space requirement in the cabinet

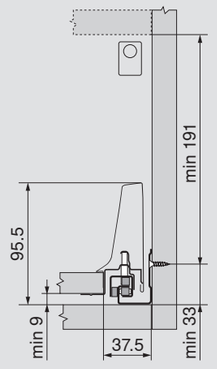


Installation dimensions – front – screw-on assembly

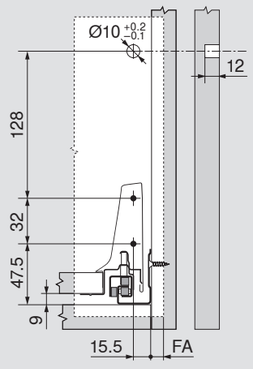


FA Front overlay


Drilling distances – front – INSERTA | knock-in assembly

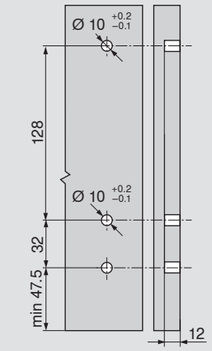


Installation dimensions – back

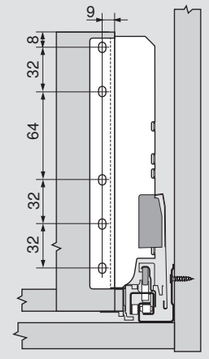

Cutting – 16 mm chipboard



Chipboard back	B (mm)
Height	199
Drawer base	**A (mm)**
Chipboard back	NL - 24




KB Cabinet width
LW Internal cabinet width
NL Nominal length

TANDEMBOX – Inner drawer – D – rectangular gallery



- Concealed, guided full extension
- Tool-free front assembly
- Includes integrated BLUMOTION for soft and effortless closing; can be combined with the SERVO-DRIVE electronic opening support system
- Or with TIP-ON BLUMOTION

Space requirement




NL Nominal length

Ordering information

1	Cabinet profiles left/right		
	BLUMOTION *	Dynamic carrying capacity (kg)	
	Nominal length NL (mm)	30	65
	270	578.2701M	
	350	578.3501M	
	400	578.4001M	
	450	578.4501M	576.4501M
	500	578.5001M	576.5001M
	550	578.5501M	576.5501M
	650		576.6501M

* Suitable for SERVO-DRIVE and TIP-ON BLUMOTION

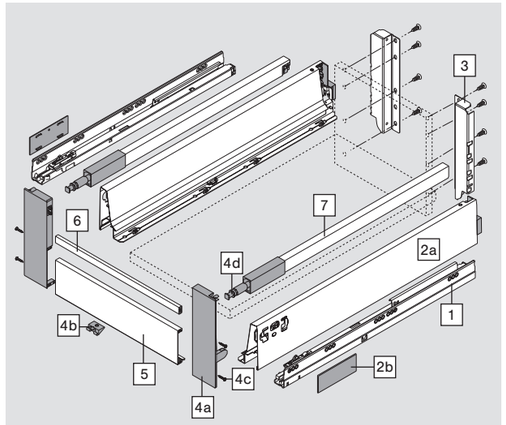

2	Drawer side set	
	Drawer side height (mm)	83.6
	Nominal length NL (mm)	SW
	270	378M2702SA
	350	378M3502SA
	400	378M4002SA
	450	378M4502SA
	500	378M5002SA
	550	378M5502SA
	650	378M6502SA
Consisting of:		
2a	1 x	Drawer sides left/right
2b	2 x	Cover caps, stamped with Blum logo, custom printed from 1,000 pcs

3	Chipboard back fixing left/right	
	Material	SW
	Steel	Z30D000SL

TANDEMBOX – Inner drawer – D – rectangular gallery

Ordering information

4	Front fixing set	
	Material	SW
	Nylon	ZIF.76D0
Consisting of:		
4a	1 x	Front fixing left/right
4b	1 x	Locking piece – Z31A0008
4c	4 x	Screws
4d	2 x	Gallery head – ZRG.000R5F

5	Front piece without groove		
	Material	Length (mm)	SW
	Aluminium	1036	Z31L1036A
Cutting	Internal cabinet width LW - 132 mm		


6	Cross gallery		
	Material	Length (mm)	SW
	Aluminium	1046	ZRG.1046Z
Cutting	Internal cabinet width LW - 122 mm		

7	Longside gallery rail left/right		
	Material	Nominal length NL (mm)	SW
	Steel	270	ZRG.207RSIC
		350	ZRG.287RSIC
		400	ZRG.337RSIC
		450	ZRG.387RSIC
		500	ZRG.437RSIC
		550	ZRG.487RSIC
		650	ZRG.587RSIC


TANDEMBOX – Inner drawer – D – rectangular gallery

Planning


Space requirement in the cabinet

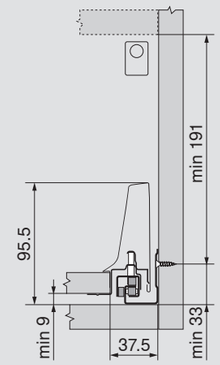


Installation dimensions – back

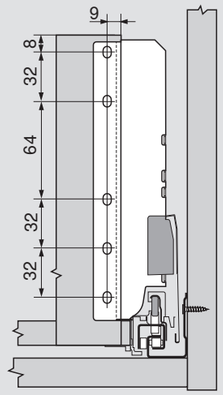

Cutting – 16 mm chipboard



Chipboard back	B (mm)
Height	199
Drawer base	**A (mm)**
Chipboard back	NL - 24



KB Cabinet width


LW Internal cabinet width

NL Nominal length

TANDEMBOX – Inner drawer – D – rectangular gallery

Planning


Front piece for cutting to size

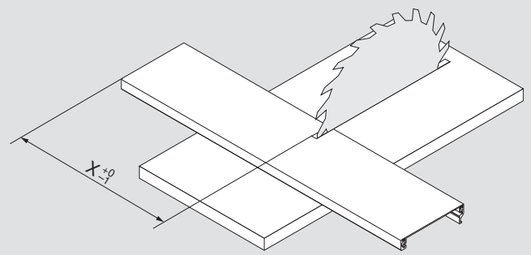

X = LW - 132

LW Internal cabinet width

Front piece for cutting to size

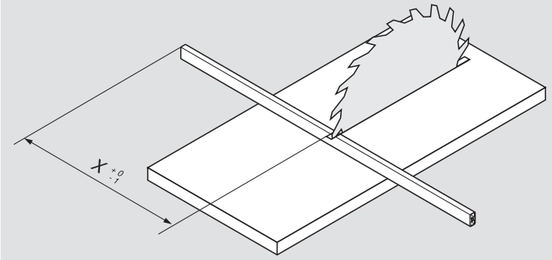

X = LW - 122

LW Internal cabinet width


TANDEMBOX – Drawer – C – aluminium frame



Example illustration showing drawer – C – rectangular gallery

- Concealed, guided full extension
- Tool-free front assembly
- 3-dimensional front adjustment
- Includes integrated BLUMOTION for soft and effortless closing; can be combined with the SERVO-DRIVE electronic opening support system
- Alternatively compatible with the TIP-ON BLUMOTION mechanical opening support system for handle-less furniture, or even for furniture with handles as a design feature

Space requirement




NL Nominal length

Ordering information

Application recommendation

Please see the relevant page for planning information and the components to be ordered. All components apart from the front fixing bracket are needed.

Drawer – C – rectangular gallery | 18

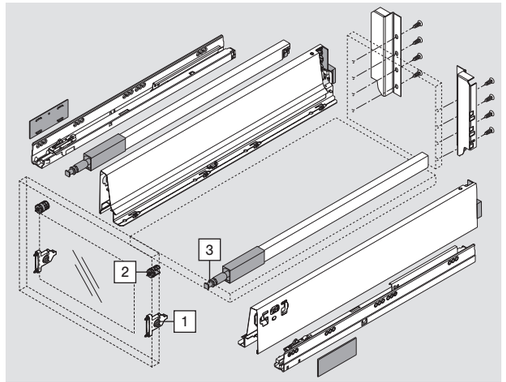

1	Front fixing bracket		
	**Fixing method**		
	Screw-on	2 x	**ZSF.35A2**


2	Adapter for aluminium frames		
	**Material**		**Natural**
	Nylon	2 x	**ZRF.2210**
Use countersunk screw Ø 3.5 mm (Ø head 7 mm)!			

3	Gallery head		
	**Material**		**Natural**
	Nylon	2 x	**ZRG.000R5F**


TANDEMBOX – Drawer – C – aluminium frame

Planning

Space requirement in the cabinet




Installation dimensions – front – screw-on assembly




FA Front overlay


Installation dimensions – back



Cutting – 16 mm chipboard



Chipboard back	B (mm)
Height	167
Drawer base	**A (mm)**
Chipboard back	NL - 24



KB Cabinet width
LW Internal cabinet width
NL Nominal length


TANDEMBOX – Drawer – D – aluminium frame



Example illustration showing drawer – D – rectangular gallery

- Concealed, guided full extension
- Tool-free front assembly
- 3-dimensional front adjustment
- Includes integrated BLUMOTION for soft and effortless closing; can be combined with the SERVO-DRIVE electronic opening support system
- Alternatively compatible with the TIP-ON BLUMOTION mechanical opening support system for handle-less furniture, or even for furniture with handles as a design feature

Space requirement




NL Nominal length

Ordering information

Application recommendation

Please see the relevant page for planning information and the components to be ordered. All components apart from the front fixing bracket are needed.

Drawer – D – rectangular gallery | 20

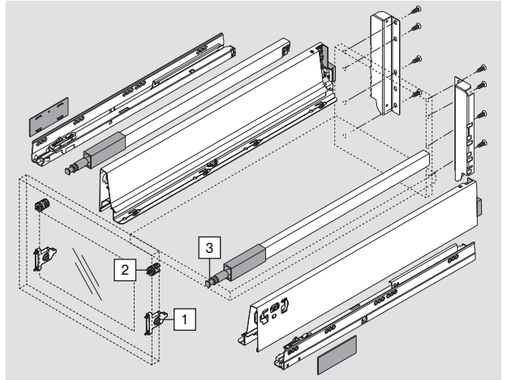

1	Front fixing bracket		
	**Fixing method**		
	Screw-on	2 x	**ZSF.35A2**


2	Adapter for aluminium frames		
	**Material**		**Natural**
	Nylon	2 x	**ZRF.2210**
Use countersunk screw Ø 3.5 mm (Ø head 7 mm)!			

3	Gallery head		
	**Material**		**Natural**
	Nylon	2 x	**ZRG.000R5F**


TANDEMBOX – Drawer – D – aluminium frame

Planning

Space requirement in the cabinet

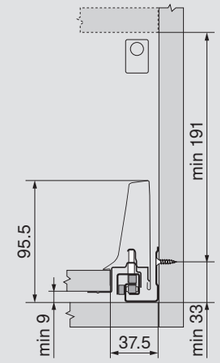


Installation dimensions – front – screw-on assembly

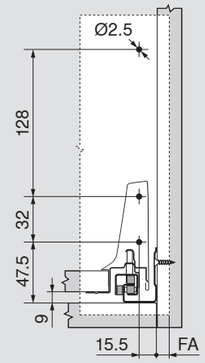


FA Front overlay


Installation dimensions – back

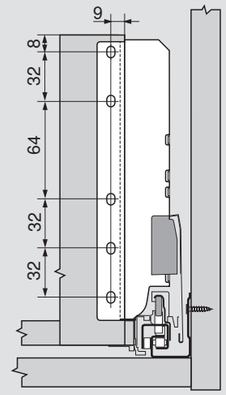

Cutting – 16 mm chipboard



Chipboard back	B (mm)
Height	199
Drawer base	**A (mm)**
Chipboard back	NL - 24



KB Cabinet width

LW Internal cabinet width


NL Nominal length

TANDEMBOX – Sink drawer – M



- Concealed, guided full extension
- Tool-free front assembly
- 2-dimensional front adjustment
- Includes integrated BLUMOTION for soft and effortless closing; can be combined with the SERVO-DRIVE electronic opening support system
- Alternatively compatible with the TIP-ON BLUMOTION mechanical opening support system for handle-less furniture, or even for furniture with handles as a design feature

Space requirement

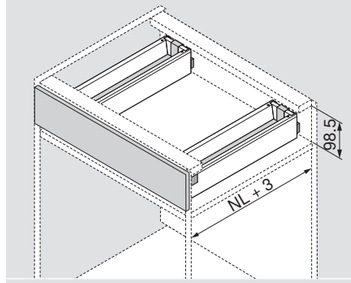


NL Nominal length

Ordering information

1	Cabinet profiles left/right		
	BLUMOTION *	Dynamic carrying capacity (kg)	
	Nominal length NL (mm)	30	65
	270	578.2701M	
	350	578.3501M	
	400	578.4001M	
	450	578.4501M	576.4501M
	500	578.5001M	576.5001M
	550	578.5501M	576.5501M
	650		576.6501M

* Suitable for SERVO-DRIVE and TIP-ON BLUMOTION

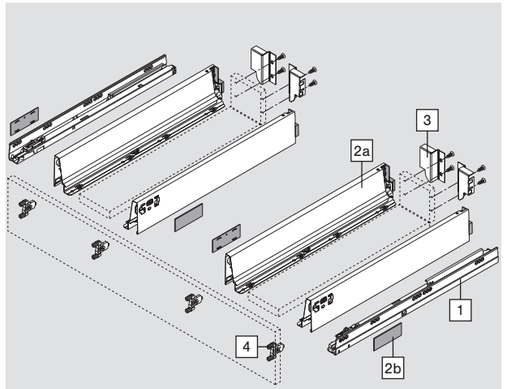

2	Drawer side set		
	Drawer side height (mm)	83.6	
	Nominal length NL (mm)		SW
	270	2 x	378M2702SA
	350	2 x	378M3502SA
	400	2 x	378M4002SA
	450	2 x	378M4502SA
	500	2 x	378M5002SA
	550	2 x	378M5502SA
	650	2 x	378M6502SA
Consisting of:			
2a	1 x	Drawer sides left/right	
2b	2 x	Cover caps, stamped with Blum logo, custom printed from 1,000 pcs	

3	Chipboard back fixing left/right		
	Material		SW
	Steel	2 x	Z30M000S.04


TANDEMBOX – Sink drawer – M

Ordering information


4	Front fixing bracket		
	Fixing method		
	INSERTA	4 x	ZSF.39A2
	Screw-on	4 x	ZSF.35A2

Planning

Space requirement in the cabinet




Installation dimensions – front – screw-on assembly




FA Front overlay


Drilling distances – front – INSERTA | knock-in assembly

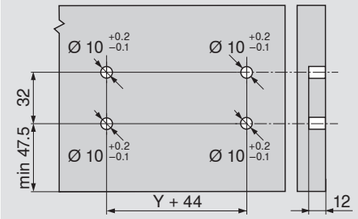


Installation dimensions – back



Cutting – 16 mm chipboard



Chipboard back	B (mm)
Height	84
Drawer base	**A (mm)**
Chipboard back	NL - 24



KB Cabinet width

LW Internal cabinet width


NL Nominal length

TANDEMBOX – Sink drawer – C – centre piece



- Can be implemented with standard components
- Concealed, guided full extension
- Tool-free front assembly
- 3-dimensional front adjustment
- Includes integrated BLUMOTION for soft and effortless closing; can be combined with the SERVO-DRIVE electronic opening support system
- Alternatively compatible with the TIP-ON BLUMOTION mechanical opening support system for handle-less furniture, or even for furniture with handles as a design feature

Space requirement

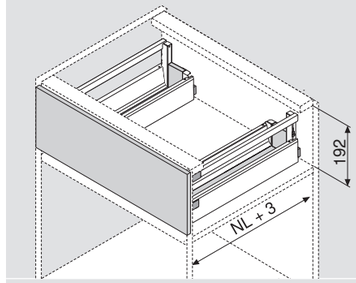


NL Nominal length

Ordering information

1	Cabinet profiles left/right		
	BLUMOTION *	Dynamic carrying capacity (kg)	
	Nominal length NL (mm)	30	65
	450	578.4501M	
	500	578.5001M	
	550	578.5501M	
	650		576.6501M

* Suitable for SERVO-DRIVE and TIP-ON BLUMOTION

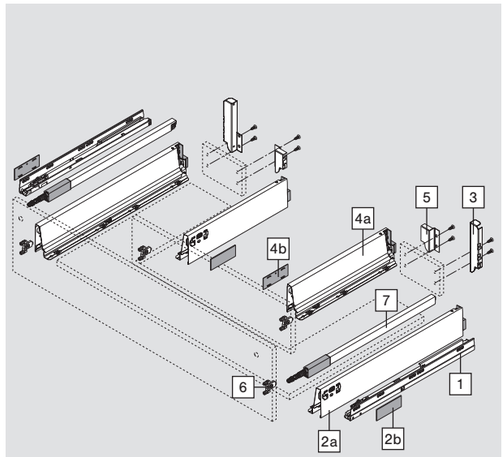

2	Drawer side set (outer side)	
	Drawer side height (mm)	83.6
	Nominal length NL (mm)	SW
	450	378M4502SA
	500	378M5002SA
	550	378M5502SA
	650	378M6502SA
Consisting of:		
2a	1 x	Drawer sides left/right
2b	2 x	Cover caps, stamped with Blum logo, custom printed from 1,000 pcs

3	Chipboard back fixing left/right	
	Material	SW
	Steel	Z30C000S

TANDEMBOX – Sink drawer – C – centre piece

Ordering information

4	Drawer side set (inner side)	
	Drawer side height (mm)	83.6
	Nominal length NL (mm)	SW
	270	378M2702SA
	350	378M3502SA
	400	378M4002SA
	450	378M4502SA
	500	378M5002SA
Consisting of:		
4a	1 x	Drawer sides left/right
4b	2 x	Cover caps, stamped with Blum logo, custom printed from 1,000 pcs

For effective use of storage space, we recommend

Nominal length NL outer drawer sides (no 2) – nominal length NL inner drawer sides (no 4) = min 150 mm

5	Chipboard back fixing left/right	
	Material	SW
	Steel	Z30M000S.04


6	Front fixing bracket		
	Fixing method		
	INSERTA	4 x	ZSF.39A2
	Screw-on	4 x	ZSF.35A2

7	Longside gallery rail left/right		
	Material	Nominal length NL (mm)	SW
	Steel	450	ZRG.387RSIC
		500	ZRG.437RSIC
		550	ZRG.487RSIC
		650	ZRG.587RSIC


TANDEMBOX – Sink drawer – C – centre piece

Planning

Space requirement in the cabinet




Installation dimensions – front – screw-on assembly




FA Front overlay


Drilling distances – front – INSERTA | knock-in assembly




Installation dimensions – back

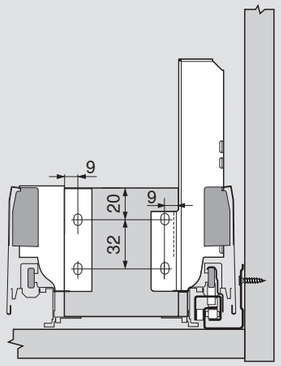

Drilling distances – centre piece




Cutting – 16 mm chipboard

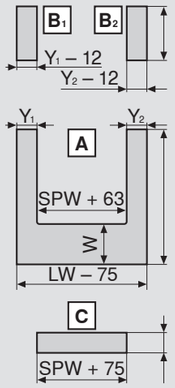

Chipboard back	B (mm)
Height	84
Drawer base	**A (mm)**
Chipboard back	NL - 24
Centre piece	**C (mm)**
Height	71

	Y min (mm)	Y max (mm)
BLUMOTION	48	225
TIP-ON BLUMOTION	75	225



KB	Cabinet width
LW	Internal cabinet width
NL	Nominal length
SPW	Internal cabinet width between inner drawer sides
W	NL outer drawer sides – NL inner drawer sides – 10 mm

Order information for Industrial packaging



Cabinet profiles left/right

Nominal length NL (mm)	BLUMOTION*	
	30 kg	65 kg
400	578.4001M	
450	578.4501M	
500	578.5001M	576.5001M
550	578.5501M	576.5501M

*Suitable for SERVO-DRIVE and TIP-ON BLUMOTION



M height drawer sides

Colour options	SW
NL (mm)	Steel
400	378M4002SA
450	378M4502SA
500	378M5002SA
550	378M5502SA




Back fixing brackets M height

Colour options	SW
Steel	Z30M000S.04



Back fixing brackets C height

Colour options	SW
Steel	Z30C000S



Back fixing brackets D height

Colour options	SW
Steel	Z30D000SL



TANDEMBOX antaro gallery rails


Colour options	SW
NL (mm)	Steel
400	ZRG.337RSIC
450	ZRG.387RSIC
500	ZRG.437RSIC

TANDEMBOX – Sink drawer – D – centre piece



- Can be implemented with standard components
- Concealed, guided full extension
- Tool-free front assembly
- 3-dimensional front adjustment
- Includes integrated BLUMOTION for soft and effortless closing; can be combined with the SERVO-DRIVE electronic opening support system
- Alternatively compatible with the TIP-ON BLUMOTION mechanical opening support system for handle-less furniture, or even for furniture with handles as a design feature

Space requirement

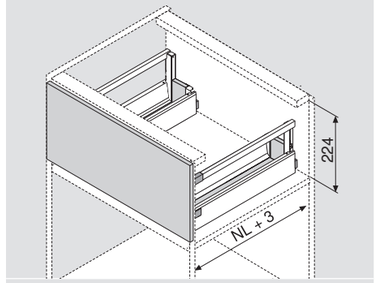


NL Nominal length

Ordering information

Application recommendation

Please see the relevant page for planning information and the components to be ordered.
Example illustration showing drawer – D – rectangular gallery

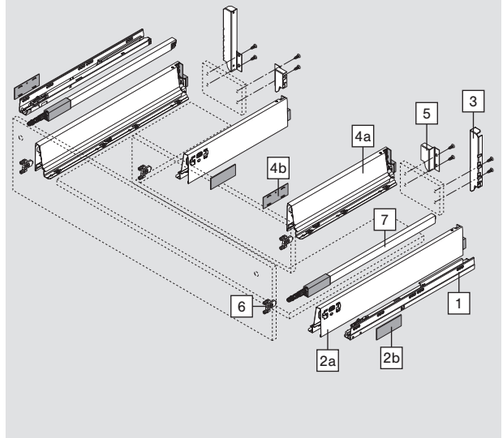

1	Cabinet profiles left/right		
	BLUMOTION *	Dynamic carrying capacity (kg)	
	Nominal length NL (mm)	30	65
	450	578.4501M	
	500	578.5001M	
	550	578.5501M	
	650		576.6501M

* Suitable for SERVO-DRIVE and TIP-ON BLUMOTION

2	Drawer side set (outer side)	
	Drawer side height (mm)	83.6
	Nominal length NL (mm)	SW
	450	378M4502SA
	500	378M5002SA
	550	378M5502SA
	650	378M6502SA
Consisting of:		
2a	1 x	Drawer sides left/right
2b	2 x	Cover caps, stamped with Blum logo, custom printed from 1,000 pcs

3	Chipboard back fixing left/right	
	Material	SW
	Steel	Z30D000SL

TANDEMBOX – Sink drawer – D – centre piece

Ordering information

4	Drawer side set (inner side)	
	Drawer side height (mm)	83.6
	Nominal length NL (mm)	SW
	270	378M2702SA
	350	378M3502SA
	400	378M4002SA
	450	378M4502SA
	500	378M5002SA
Consisting of:		
4a	1 x	Drawer sides left/right
4b	2 x	Cover caps, stamped with Blum logo, custom printed from 1,000 pcs
For effective use of storage space, we recommend		
Nominal length NL outer drawer sides (no 2) – nominal length NL inner drawer sides (no 4) = min 150 mm		

5	Chipboard back fixing left/right	
	Material	SW
	Steel	Z30M000S.04


6	Front fixing bracket		
	Fixing method		
	INSERTA	4 x	ZSF.39A2
	Screw-on	4 x	ZSF.35A2

7	Longside gallery rail left/right		
	Material	Nominal length NL (mm)	SW
	Steel	450	ZRG.387RSIC
		500	ZRG.437RSIC
		550	ZRG.487RSIC
		650	ZRG.587RSIC


TANDEMBOX – Sink drawer – D – centre piece

Planning

Space requirement in the cabinet

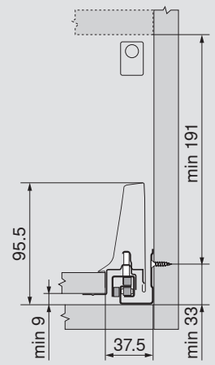


Installation dimensions – front – screw-on assembly

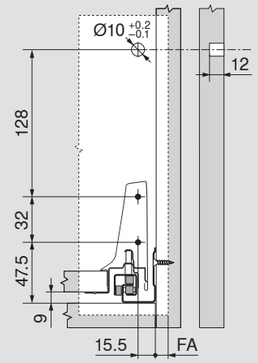


FA Front overlay


Drilling distances – front – INSERTA | knock-in assembly

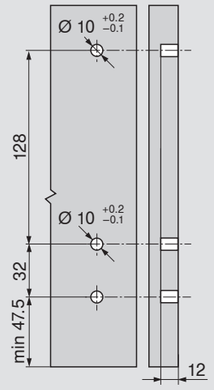


Installation dimensions – back

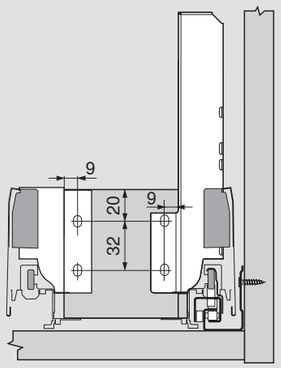

Drilling distances – centre piece




Cutting – 16 mm chipboard

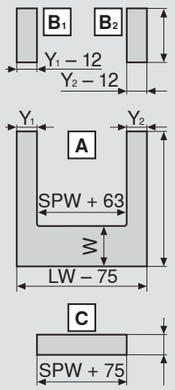

Chipboard back	B (mm)
Height	84
Drawer base	**A (mm)**
Chipboard back	NL - 24
Centre piece	**C (mm)**
Height	71

	Y min (mm)	Y max (mm)
BLUMOTION	48	225
TIP-ON BLUMOTION	75	225



KB	Cabinet width
LW	Internal cabinet width
NL	Nominal length
SPW	Internal cabinet width between inner drawer sides
W	NL outer drawer sides – NL inner drawer sides – 10 mm

Order information for Industrial packaging



Cabinet profiles left/right

Nominal length NL (mm)	BLUMOTION*	
	30 kg	65 kg
400	578.4001M	
450	578.4501M	
500	578.5001M	576.5001M
550	578.5501M	576.5501M

*Suitable for SERVO-DRIVE and TIP-ON BLUMOTION



M height drawer sides

Colour options	SW
NL (mm)	Steel
400	378M4002SA
450	378M4502SA
500	378M5002SA
550	378M5502SA



Back fixing brackets M height

Colour options	SW
Steel	Z30M000S.04



Back fixing brackets C height

Colour options	SW
Steel	Z30C000S



Back fixing brackets D height

Colour options	SW
Steel	Z30D000SL



TANDEMBOX antaro gallery rails


Colour options	SW
NL (mm)	Steel
400	ZRG.337RSIC
450	ZRG.387RSIC
500	ZRG.437RSIC

TANDEMBOX – SPACE TWIN



- Stable solution thanks to diagonally offset cabinet profiles
- Includes integrated BLUMOTION for soft and effortless closing
- High dynamic carrying capacity of 20 kg per base cabinet
- Cabinet width KB 165–250 mm

Space requirement



NL Nominal length


Ordering information

Application recommendation	
Please see the relevant page for planning information and the components to be ordered.	
Drawer – M	8
Drawer – C – rectangular gallery	14
Drawer – D – rectangular gallery	20

TANDEMBOX – SPACE TWIN

Planning


Space requirement in the cabinet

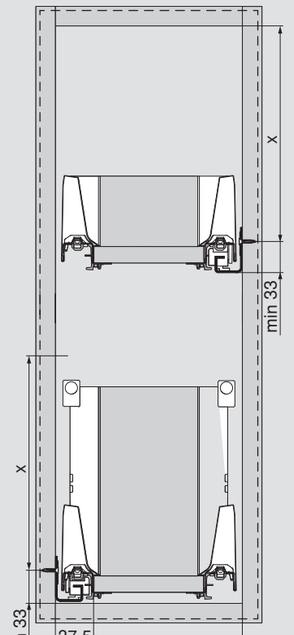

Back height	X (mm)
M	65.5
C	159
D	191

* 147 mm with SERVO-DRIVE
167 mm with TIP-ON BLUMOTION

Front installation dimensions

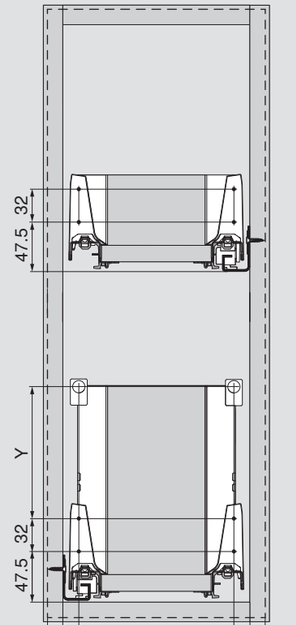

Back height	Drawer side height	Side panel	Y (mm)
M	M	–	–
C	M	Longside gallery rail	96
D	M	Longside gallery rail	128

FA Front overlay


TANDEMBOX – SPACE STEP



- Enables access to the next storage level up in wall cabinets
- Creates extra storage space in the drawer under SPACE STEP
- Can be combined with BLUMOTION soft close, SERVO-DRIVE Electrical opening support, or TIP-ON BLUMOTION mechanical opening
- Extremely versatile: SPACE STEP can be used in all living spaces

Ordering information

Application recommendation	
Please see the relevant page for planning information and the components to be ordered.	
Drawer – N	6
Drawer – M	8

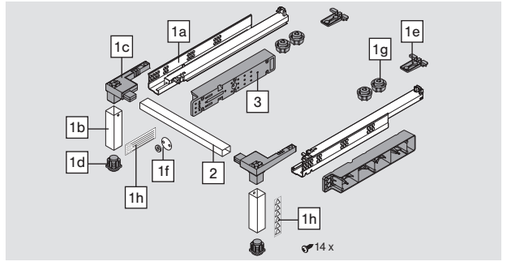

1	SPACE STEP set		
	Nominal length NL (mm)	Colour	
	410	Orion grey matt	Z95.4100
	460		Z95.4600
Consisting of:			
1a	1 x	TANDEM 561Hxxx1B95 left/right	
1b	2 x	Vertical support	
1c	2 x	Corner connector	
1d	2 x	Support foot	
1e	2 x	Rear panel bracket	
1f	1 x	Front connector set (magnet and catch plate)	
1g	4 x	Spring bumper Cabinet width KB > 900 mm, use four spring bumpers	
1h	2 x	Sticker (safety information and manufacturer information sticker)	
–	14 x	Pan head screws Ø 4 x 15 mm	
–	1 x	Installation instructions	

2	Horizontal profile [1]		
	Material	Length (mm)	
	Aluminium	1040	
			Z95Q1040A
Cutting	Internal cabinet width LW - 132 mm		

[1] Cabinet width KB 1200 mm, use two pcs to prevent excessive bending

Accessories

3	Blum spacer strip [1]		
	Material		
	Nylon	2 x	Z95D4100

[1] For mounting the drawer runners, suitable for all Blum box and runner systems

Note

Max load bearing capacity 150 kg

As the manufacturer, you are responsible for determining the actual load bearing capacity of the furniture manufactured by you that uses SPACE STEP as per EN-14183. This value must also be stated on the manufacturer information sticker.

Possible cabinet heights

The possible cabinet height for SPACE STEP is 150–250 mm.

Recommended material

A 3-ply panel (3S) at least 21 mm thick is recommended for the plinth step.

Recommended step surface

The step surface must be anti-slip. This can take the form of an anti-slip mat directly affixed to the step surface or by using anti-slip panel material. To ensure that SPACE STEP is held firmly in place, the floor and step surface must be clean and dry. Cabinet width KB > 900 mm, use four spring bumpers.

Attaching the labels

EN-14183 requires both of the labels enclosed to be clearly displayed.

Drawer under SPACE STEP

Only 30 or 40 kg runners may be used. The dynamic carrying capacity of the drawer under SPACE STEP is 20 kg.

Cabinet above SPACE STEP

If storage items are kept on the cabinet base above SPACE STEP, we recommend protecting the base against sagging. This will help to prevent SPACE STEP rubbing on the cabinet base panel.

TIP-ON BLUMOTION


We recommend an L5 unit when using TIP-ON BLUMOTION.

TANDEMBOX – SPACE STEP

Planning

TANDEMBOX – Drawer – N


Space requirement in the cabinet



Min cabinet width KB 400 mm


KH Cabinet height

Installation dimensions – front – screw-on assembly




FA Front overlay

Drilling distances – front – EXPANDO



TANDEMBOX – Drawer – M


Space requirement in the cabinet



Min cabinet width KB 400 mm


KH Cabinet height

Installation dimensions – front – screw-on assembly



FA Front overlay

Drilling distances – front – EXPANDO




Installation dimensions for minimum pull-out shelf base thickness 21 mm – without anti-slip mat


TANDEMBOX – SPACE STEP

Planning

Space requirement – Recess | Flush plinth front

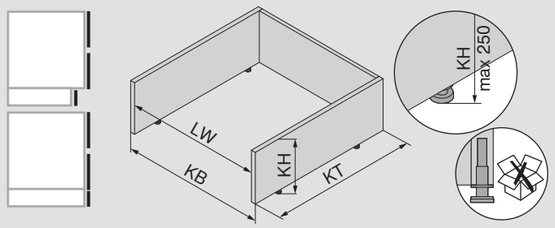


KB	Cabinet width
KH	Cabinet height (including cabinet foot)
KT	Cabinet depth
LW	Internal cabinet width

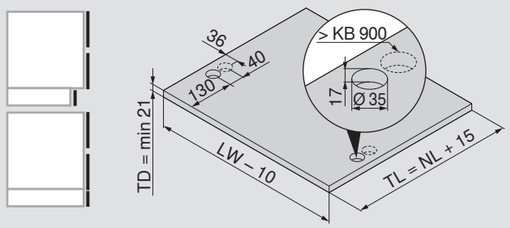


KB	Cabinet width
LW	Internal cabinet width
NL	Nominal length
TD	Pull-out shelf base thickness
TL	Shelf length

Space requirement – Recess – recessed low plinth

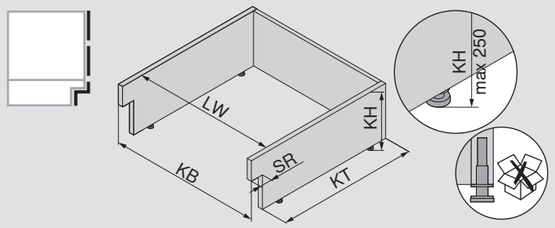


KB	Cabinet width
KH	Cabinet height (including cabinet foot)
KT	Cabinet depth
LW	Internal cabinet width
SR	Plinth recess (max 100 mm)

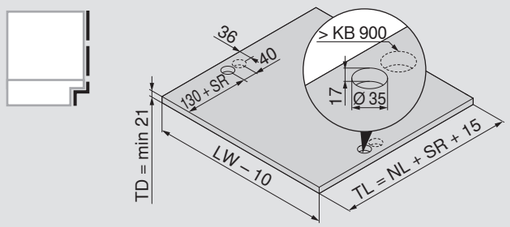


KB	Cabinet width
LW	Internal cabinet width
NL	Nominal length
SR	Plinth recess
TD	Pull-out shelf base thickness
TL	Shelf length

Example – Cross member for plinth cabinet

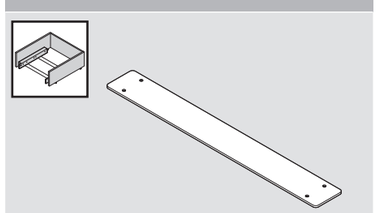

In-house production


Installation dimensions – Side panel – left|right

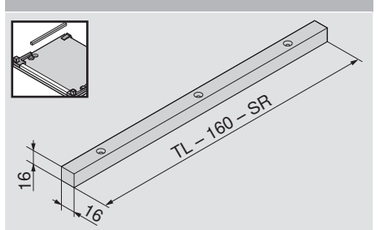

SR	Plinth recess
TL	Shelf length

In-house production

Cutting – horizontal profile

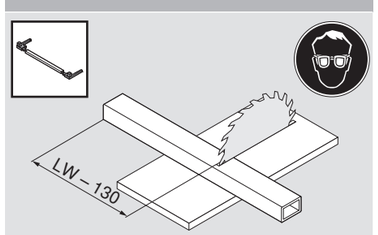


LW Internal cabinet width

TANDEMBOX – SPACE STEP


Planning

Cutting – vertical support

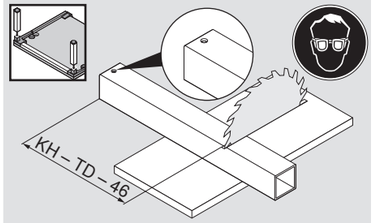


KH	Cabinet height
TD	Pull-out shelf base thickness

Installation dimensions – wood spacer strip



X (mm)
50
In-house production


Installation dimensions – Blum spacer strip

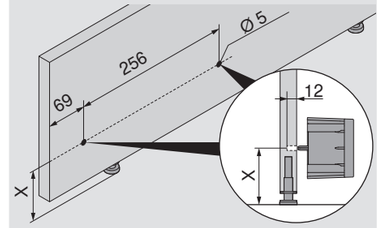

X (mm)
51
Chipboard screw Ø 3.5 x 60 mm or Ø 4 x 60 mm


Cabinet profile fixing positions | runners

Runner – SPACE STEP – 561H4101B95

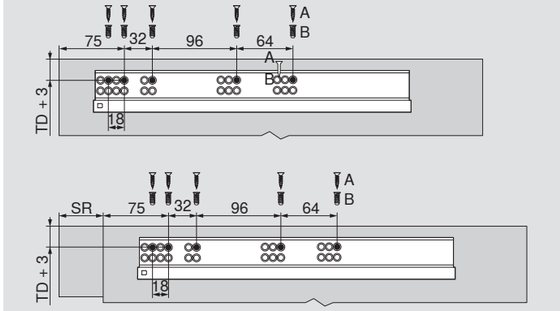


Nominal length NL (mm)	
Box and runner systems	**SPACE STEP**
≤ 450	410
TD	Pull-out shelf base thickness
SR	Plinth recess
A	Chipboard screw Ø 4 x 15 mm
B	System screw Ø 6 x 14.5 mm, part no 661.1450.HG

Runner – SPACE STEP – 561H4601B95

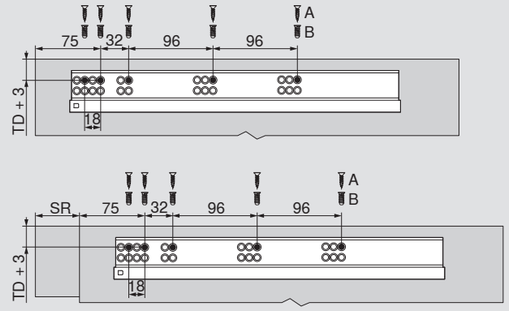

Nominal length NL (mm)	
Box and runner systems	**SPACE STEP**
> 450	460
TD	Pull-out shelf base thickness
SR	Plinth recess
A	Chipboard screw Ø 4 x 15 mm
B	System screw Ø 6 x 14.5 mm, part no 661.1450.HG


Cabinet profile – 578–30 kg

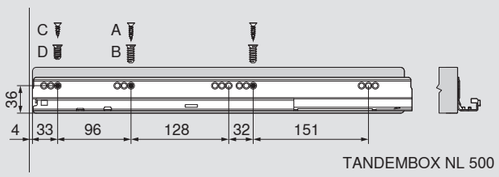

NL	Nominal length
A	Chipboard screw Ø 4 x 15 mm
B	System screw Ø 6 x 14.5 mm, part no 661.1450.HG Fixing on the Blum spacer strip is only possible with system screws
C	Chipboard screw Ø 4 x 12 mm
D	System screw Ø 6 x 11.5 mm, part no 661.1150.HG Fixing on the Blum spacer strip is only possible with system screws

Accessories

Front/base stabiliser




- For stabilising high fronts
- For supporting wide drawer bases
- Recommendation:
  Front height FH < 300 mm:
  Cabinet width KB > 900 mm: 1 pc
  Front height FH ≥ 300 mm:
  Cabinet width KB < 450 mm: 1 pc
  Cabinet width KB ≥ 450 mm: 2 pcs
  Cabinet width KB > 900 mm: 3 pcs


Ordering information	
Fixing method	**RAL 7037 dust grey**
EXPANDO	**Z96.10E1**

Planning

Space requirement in the cabinet



Drilling distances – front

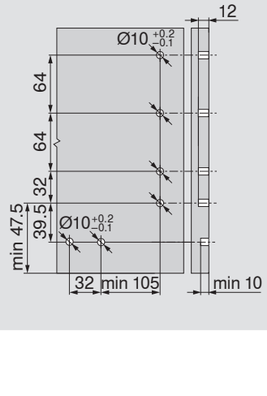


Accessories

Chipboard back fixing height B


Ordering information		
Material	**Back height**	**SW**
Steel	B	**Z30B000S.04**
Chipboard back cutting		
Height	135 mm	
Width	Internal cabinet width LW – 87 mm	

Planning

Space requirement in the cabinet




Installation dimensions – front – screw-on assembly




FA Front overlay

Installation dimensions – back



Accessories

Flexible gallery fixing




Ordering information		
Material	**Version**	**SW**
Steel	left|right	**ZRR.5200**

Planning

Free placement


Space requirement in the cabinet



Y = X - 4 mm

X Back height

Installation dimensions – front – screw-on assembly




Z = X – 71 mm

X Back height

FA Front overlay

Installation dimensions – back




W = X – 103 mm


X Back height

Height D – double gallery (chipboard back fixing height B)

Space requirement in the cabinet

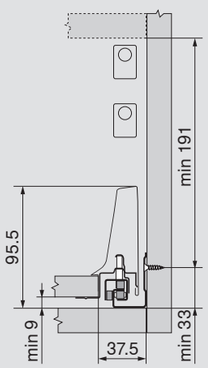


Installation dimensions – front – screw-on assembly

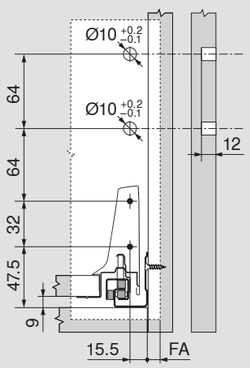

FA Front overlay


Installation dimensions – back

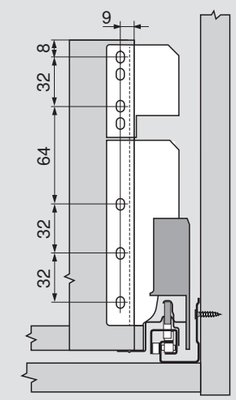

Cabinet profile fixing

Cabinet profile 578–30 kg


Nominal length NL (mm)

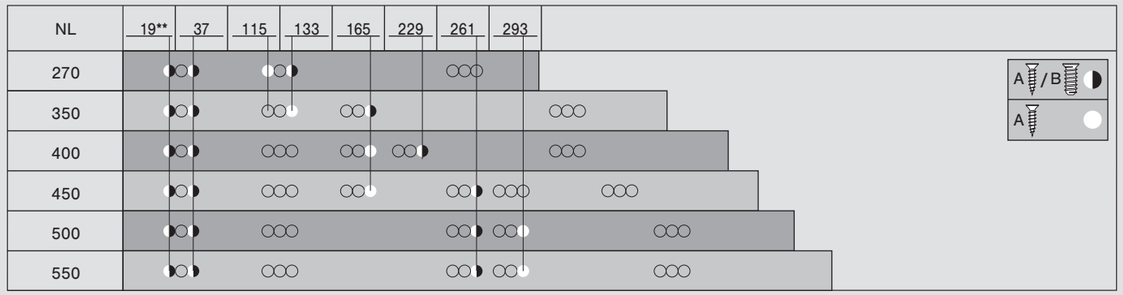

A	Chipboard screw Ø 4 x 15 mm
B	System screws Ø 6 x 14.5 mm
**	Optional for greater stability Can be replaced with chipboard screw Ø 4 x 15 mm

Cabinet profile 576–65 kg

Nominal length NL (mm)

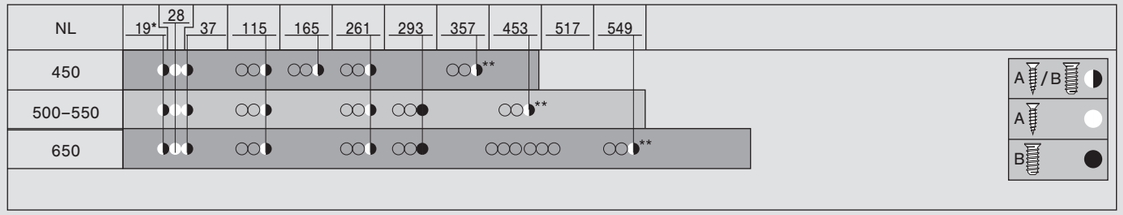

A	Chipboard screw Ø 4 x 15 mm
B	System screws Ø 6 x 14.5 mm
*	Can be replaced with chipboard screw Ø 4 x 15 mm
**	Optional for greater stability Can be replaced with chipboard screw Ø 4 x 15 mm


SERVO-DRIVE for TANDEMBOX




For information about SERVO-DRIVE, go to:

www.blum.com/sdr17

TIP-ON BLUMOTION for TANDEMBOX

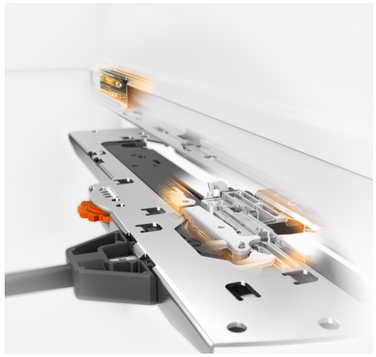

- TIP-ON mechanical opening support system combined with BLUMOTION for soft and effortless closing
- Front gap FS 2.5 mm
- 4-dimensional front adjustment
- Extensive trigger range
- Synchronised feather-light glide
- Synchronisation for internal cabinet width LW of 238 mm or more

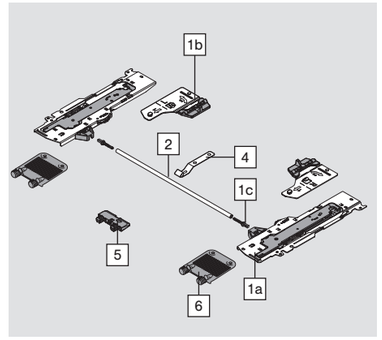

Ordering information

1		TIP-ON BLUMOTION set			
		Make the right calculations for your TIP-ON BLUMOTION unit using the Product Configurator: **www.blum.com/configurator**			
Nominal length NL (mm)	**Unit**		**Cabinet profile (kg)**	**Weight (kg)[1]**	
270	S0	**WS**	30	≤ 10	**T60B3030**
	S1	**R7035**		> 10–20	**T60B3130**
350–600	L1	**R7035**		≤ 20 [2]	**T60B3330**
	L3	**R7037**		15–30 [2]	**T60B3530**
450–650	L5	**SZ**	65	> 30–65 [3]	**T60B3560**
Consisting of:					
1a	1 x	TIP-ON BLUMOTION unit left/right			
1b	1 x	TIP-ON BLUMOTION latch left/right			
1c	2 x	TIP-ON BLUMOTION synchronisation adapter			


[1] Recommended weight ranges (total weight of drawer) for optimum opening and closing function

[2] Can only be combined with a 30 kg cabinet profile

[3] Recommendation: only use in combination with 65 kg cabinet profile

Internal cabinet width LW ≥ 287 mm			
2	**TIP-ON BLUMOTION synchronisation linkage**		
	**Version**	**Colour**	
	Approx	Grey	**T60.1125W**
Cutting	Internal cabinet width LW - 240 mm		
In combination with **4** 2 x T60.000D			
For cutting to size			
Suitable up to internal cabinet width LW 1365 mm			
To optimise the function and increase the trigger range, we generally recommend using synchronisation			

Accessories

1c	TIP-ON BLUMOTION synchronisation adapter[1]	
	**Version**	**Colour**
	Symmetrical	R7035
	2 x	**T60.000D**

[1] Internal cabinet width LW ≥ 287 mm

4	TIP-ON BLUMOTION synchronisation linkage fixing[1]	
	**Cabinet width KB (mm)**	**Material**
	≥ 750	Steel
		T60B000H

[1] For drawers over a cabinet base or cross member
Prevents the TIP-ON BLUMOTION synchronisation linkage from sagging

5	Base support bracket[1]	
	**Cabinet width KB (mm)**	**Colour**
	≥ 750	R7035
		Z96.2011

[1] For drawers over a cabinet base or cross member
For supporting the drawer base

6	Front/base stabiliser	
	**Material**	**Colour**
	Nylon	R7037
	2 x	**Z96.10E1**


-	Front gap template for MERIVOBOX | TANDEMBOX		
	**Front gap FS (mm)**	**Colour**	
	2.5	Orange	**65.5627**

TIP-ON BLUMOTION for TANDEMBOX

Planning

Space requirement in the cabinet


Drawer



Back height	Y (mm)
N	85.5
M	101.5
C	195
D	227

NL Nominal length

Inner drawer




Back height	Y (mm)
M	109
C	195
D	227


NL Nominal length

Space requirement in the cabinet

Drawer




Inner drawer




Height M

* For 36–39 mm and a cabinet width KB of ≥ 750 mm you will need a TIP-ON BLUMOTION synchronisation linkage fixing and a base support bracket to prevent the synchronisation linkage from colliding with the cabinet base or the cross member. A trial application is recommended

Screw position – inner drawer




Option 1



Option 2


Plinth leg

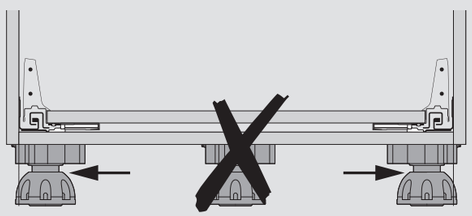

TIP-ON BLUMOTION for TANDEMBOX

Planning

Trigger range

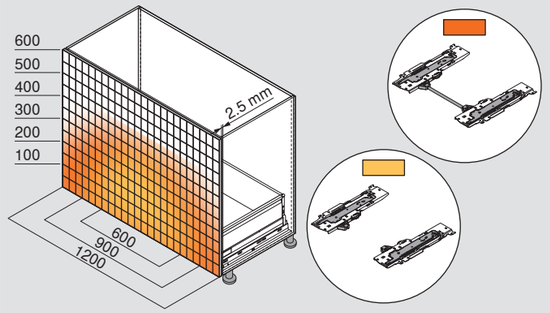

Trigger range	
With synchronisation	
Without synchronisation	
Minimum front gap (mm)	2.5

With front/base stabiliser

To optimise the function and increase the trigger range, we generally recommend using synchronisation

Example for 578–30 kg | 576–65 kg, height D, nominal length NL 500 mm

Accessories

TIP-ON BLUMOTION synchronisation linkage fixing




- Prevents the TIP-ON BLUMOTION synchronisation linkage from sagging
- For drawers over a cabinet base or cross member
- Required for cabinet width KB of ≥ 750 mm

Ordering information


Material	Natural
Steel	T60B000H

Planning


Drilling distance – drawer base



Nominal length (mm)	TIP-ON BLUMOTION unit
270	S0 | S1



Nominal length (mm)	TIP-ON BLUMOTION unit
350–650	L1 | L3 | L5



Nominal length (mm)	TIP-ON BLUMOTION unit
450–650	L1 | L3 | L5

TIP-ON BLUMOTION for TANDEMBOX

Accessories

Base support bracket




- For supporting the drawer base
- For drawers over a cabinet base or cross member
- Required for cabinet width KB of ≥ 750 mm


Ordering information	
Material	**RAL 7037 dust grey**
Nylon	**Z96.2011**

Planning

Space requirement in the cabinet




Drilling distances – front



FA Front overlay

Front/base stabiliser




- For stabilising high fronts
- For supporting wide drawer bases
- Required:
  Front height FH > 300 mm:
  Cabinet width KB ≥ 750 mm: 2 pcs
- Recommendation:
  Front height FH > 300 mm:
  Cabinet width KB < 750 mm: 1 pc


Ordering information	
Fixing method	**RAL 7037 dust grey**
EXPANDO	**Z96.10E1**

Planning

Space requirement in the cabinet




Front drilling distances



FA Front overlay

Required:
Front height FH > 300 mm:
Cabinet width KB ≥ 750 mm: 2 pcs



FA Front overlay

Recommendation:
Front height FH > 300 mm:
Cabinet width KB < 750 mm: 1 pc


BOXFIX plus



- Pneumatic assembly equipment for the efficient assembly of drawers
- Assembly method: screws (or nails)
- Nominal length: 270–650 mm
- Cabinet width: 275–1200 mm
- Can be used for chipboard back assembly

Ordering information	
BOXFIX plus	
	ZMM.2500


BOXFIX E-T



- Convenient device for fast assembly of TANDEMBOX
- All TANDEMBOX components are assembled seamlessly with great precision
- For all drawer side materials
- Assembly method: screws
- Nominal length: 270–650 mm
- Cabinet width: 250–1200 mm
- Material: nylon/steel

Ordering information	
BOXFIX E-T	
	ZMM.0350

Marking template for TANDEMBOX

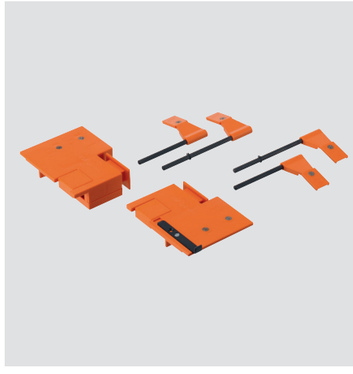

- Template for marking the fixing positions for front fixings
- Material: nylon/steel

Ordering information	
Marking template for TANDEMBOX	
TANDEMBOX – 378M	**ZML.3580.01**

MINIPRESS top



- Calculates precise drilling positions automatically (when combined with EASYSTICK)
- Ruler moves automatically (x-axis) for workpiece dimensions up to 2681 mm
- Vertical drilling unit (y-axis) moves automatically up to 350 mm
- Tool-free drill head clamping technology
- Quick change of drilling heads already equipped with drill bits

Ordering information	
MINIPRESS top with EASYSTICK	
	M70E2000

MINIPRESS P



- Allows fixing holes to be drilled for the TANDEMBOX front fixing bracket, cabinet profiles, drawer bases and chipboard back fixings.

Ordering information	
MINIPRESS P	
	M53.2050AU

EASYSTICK



- EASYSTICK – the new, automatic and easy to set up ruler system for processing machines from Blum
- Tool-free adjustment and digital determination of fixing positions for the TANDEMBOX front fixing bracket and cabinet profiles
- Transfer planned data from the Cabinet Configurator directly to EASYSTICK via a USB stick
- The barcode scanner allows you to retrieve and edit imported manufacturing and drilling data

Ordering information	
EASYSTICK	
Ruler for MINIPRESS top	**MZD.2700**
Ruler for MINIPRESS P	**MZD.2000**
Computer	**MZD.5700.01**
MINIPRESS P computer holder	**MZD.4000**
Spacer for EASYSTICK	**MZD.5390**

TANDEMBOX | Assembly devices



Quality of living

Our mission is to deliver beauty and convenience for a better quality of living.

Product range

Our extensive product range has everything you need to turn your ideas into reality.

Inspiration

We monitor global trends and innovate to create solutions for tomorrow.

Innovation

We keep moving forward and constantly develop new products and services for you.

Services

Our services are tailored to your needs with one simple goal: to make your life easier.

Quality

Quality is paramount, so we continuously strive to improve our products and services.

Trust

We take responsibility for partnerships, our employees, society and the environment.

It all started with Julius Blum and horseshoe studs in 1952. Today we develop and supply top quality furniture fittings to customers in over 120 countries around the world.



Blum services

Our services are precisely tailored to your needs along the entire manufacturing chain, allowing you to work more efficiently and therefore save time. Custom built for you. Available whenever and wherever you need them.

Digital services
Digital support for more efficiency

Assembly devices
Practical tools for precise manufacturing

Communication services
Comprehensive material for targeted marketing

Personal services
Direct contact for customer-centric support

Logistics services
Optimised processes for quick delivery

Find out more about our services:
www.blum.com/services

Blum Showrooms

Sydney (Head Office)
10 Blackbird Close
Len Waters Estate NSW 2171
Ph: 02 9612 5400

Adelaide
179 Railway Terrace
Mile End SA 5031
Ph: 08 8118 6070

Brisbane
6/39-45 Compton Road
Underwood QLD 4119
Ph: 07 3135 9490

Melbourne
245 Ferntree Gully Road
Mount Waverley VIC 3149
Ph: 03 9982 1720

Perth
3/425 Scarborough Beach Road
Osborne Park WA 6017
Ph: 08 6467 0110

Blum Australia Pty Ltd
PO BOX 1615, Green Valley,
NSW, 2168, Australia
Toll Free: 1800 179 186
E-mail: info.au@blum.com
blum.com

ISO 9001 Certified Quality System
ISO 14001 Certified Environmental System
ISO 50001 Certified Energy System