
SPACE TOWER

Web code – click on the code or enter it in the Product Configurator: DQGRMM


Planning

Recommendation


Positioning in the cabinet

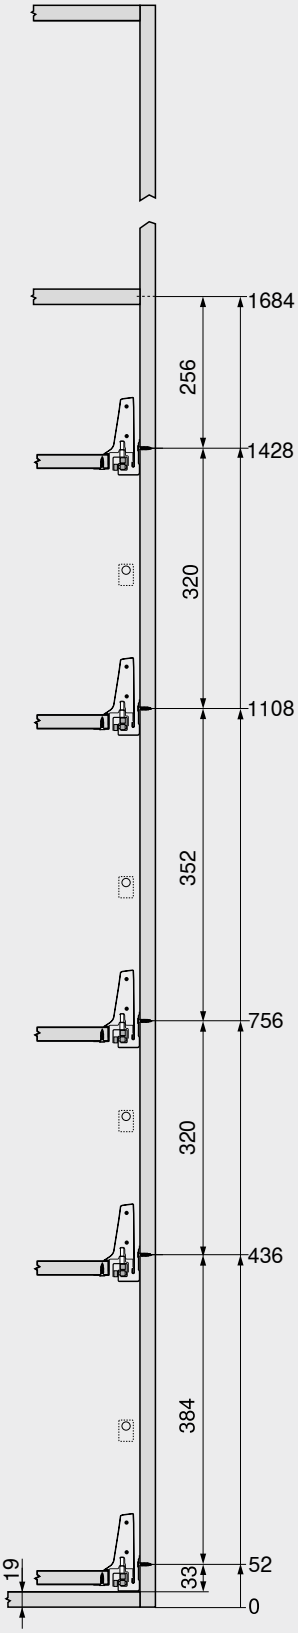

Drilling distances – front

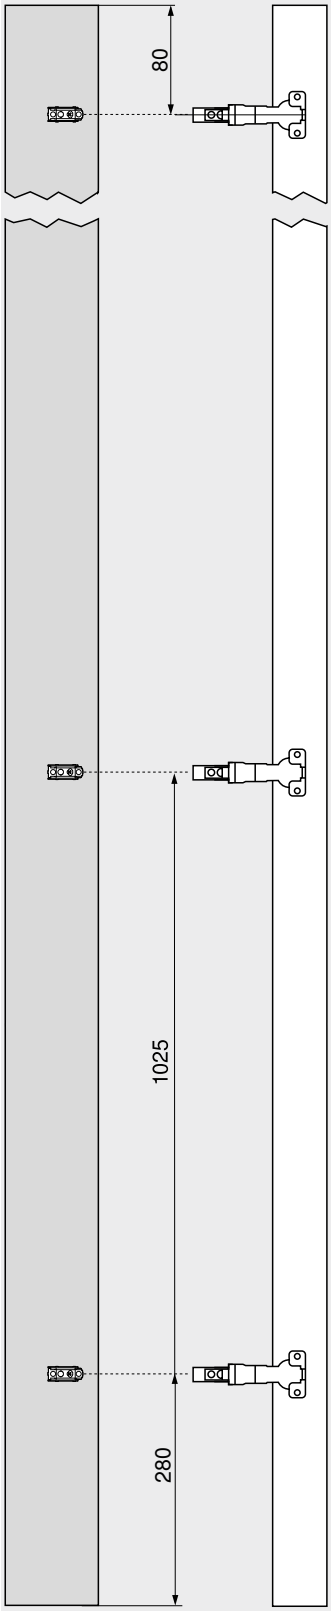

Drilling distances – front

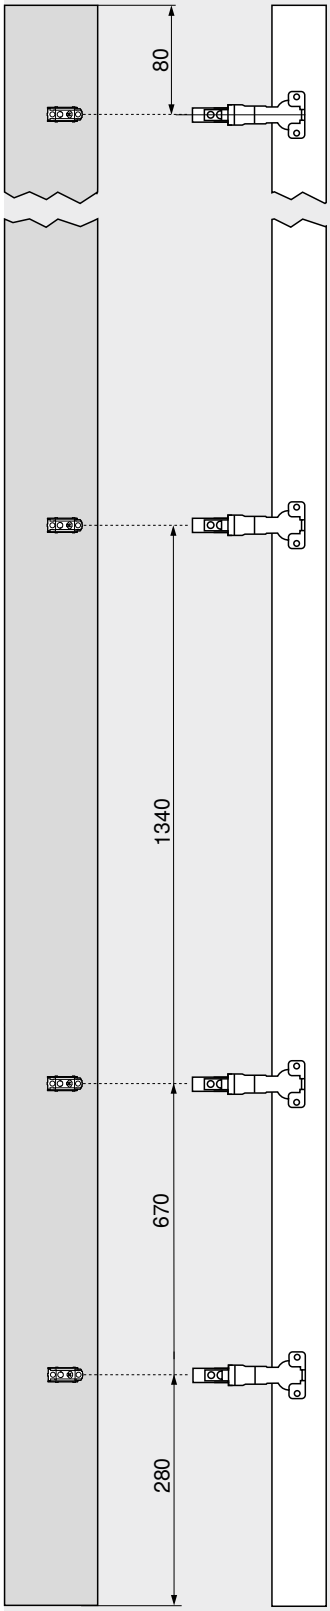

In high cabinets, it is practical to have a shelf at the highest level rather than an inner drawer.

The inner drawer allows access from the side. If the inner drawer is implemented with a higher back, stored goods are prevented from falling down the back.

The option to position the pull-outs at different heights within the cabinet guarantees that no items will be too tall to be stored inside.

The **CLIP top BLUMOTION** 155° hinge without front protrusion allows the cabinet width KB to be put to optimal use.

If the hinge is mounted above the pull-out, the lowest pull-out can be inserted right at the bottom. Turning even those last few centimetres into usable storage space.

Reference pages

Number of hinges 718