
Side stabilisation – top mounted

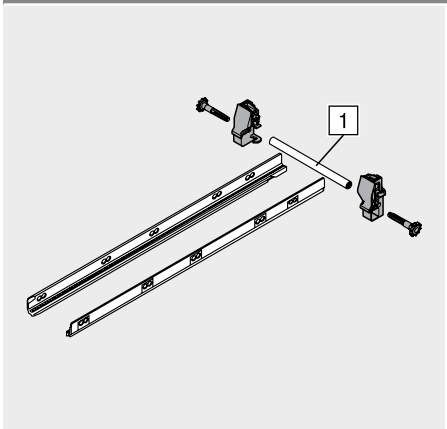

- Additional stabilisation for extra wide high fronted pull-outs
- Recommendation: cabinet width KB 900–1200 mm
- Aluminium rod suitable for KB up to 1200 mm, for cutting to size
- Suitable for use with **SERVO-DRIVE**

Order information


Nominal length NL (mm)	Part no.
450	ZST.450BA
500	ZST.500BA
550	ZST.550BA
600	ZST.600BA
650	ZST.650BA

Cutting

1 Internal cabinet width LW – 86 mm


Planning

Space requirement in cabinet




Height M

Space requirement in cabinet




Height K

Space requirement in cabinet



Height C


Space requirement in cabinet

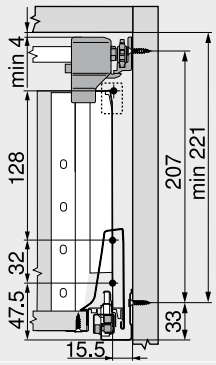

Height D

Hole spacing – side stabilisation

Nominal length NL (mm)

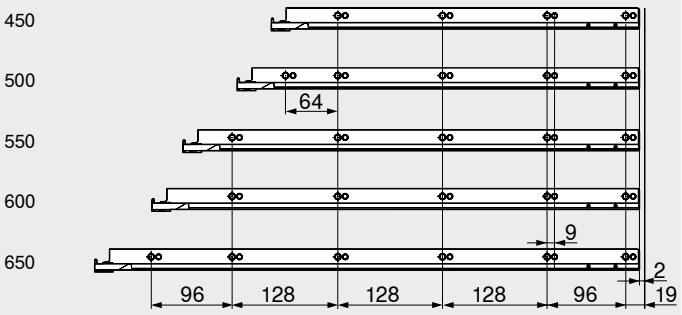

Internal cabinet depth LT min. = nominal length NL + 3 mm

Reference pages

Overview	291
Blum services	602
More technical details	708

Assembly, removal and adjustment

Short URL
www.blum.com/a350