
TIP-ON BLUMOTION for TANDEMBOX

Planning

Space requirement in cabinet


Drawer | high fronted pull-out

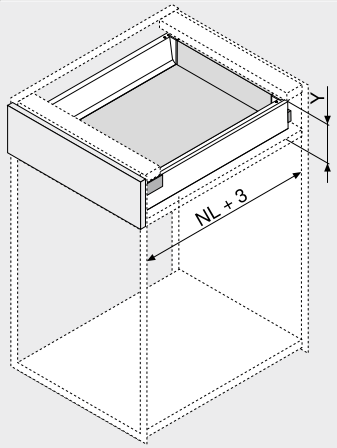

Back height	Y (mm)
N	85.5
M	101.5
K	133.5
B	161
C	195
D	227

NL Nominal length


Inner drawer | inner pull-out

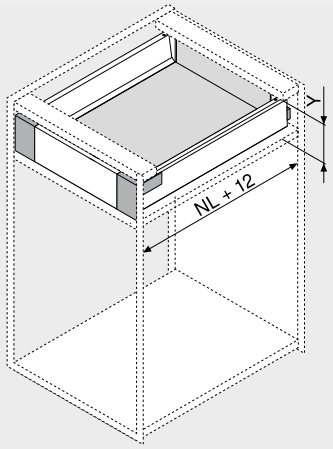

Back height	Y (mm)
M	109
K	139.5
B	161
C	195
D	227

NL Nominal length


Drawer | high fronted pull-out

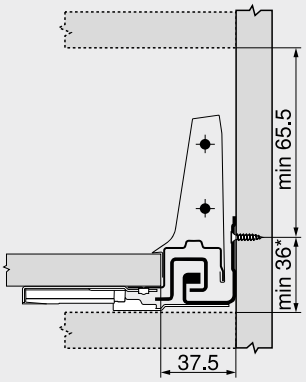


Height M

* At 36–39 mm and with a cabinet width KB of ≥ 750 mm, a **TIP-ON BLUMOTION** synchronisation fixing and a base support bracket are required so as to avoid the synchronisation linkage colliding with the cabinet bottom or the cross member In these cases a trial is recommended


Inner drawer | inner pull-out

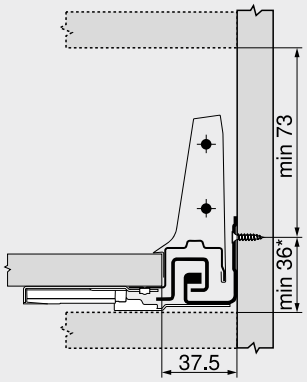

Screw position – inner drawer | inner pull-out




Variant 1




Variant 2

Plinth leg

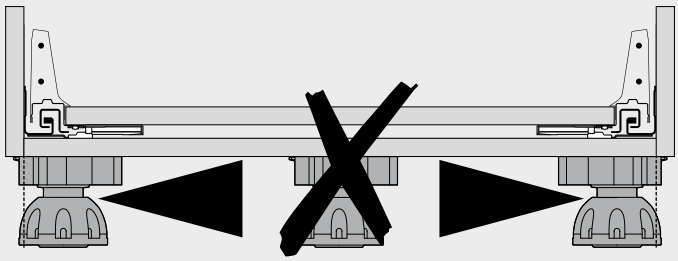

Trigger range

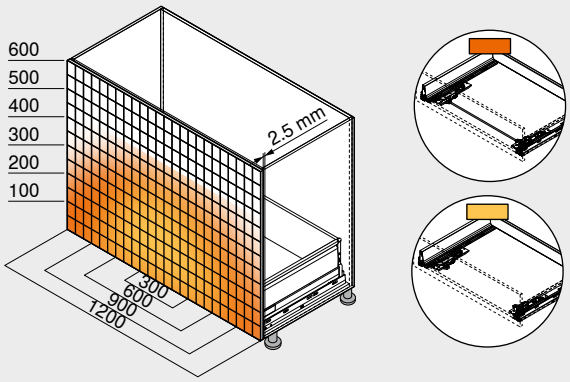

Trigger range

With synchronisation

Without synchronisation

Front gap FS min. (mm)	2.5

With front/base stabiliser

To optimise the function and increase the trigger range, we generally recommend using synchronisation

Example for 578 – 30 kg | 576 – 65 kg, D height, nominal length NL 500 mm

Reference pages

Overview	395	Blum services	602	**Assembly, removal and adjustment**	
TANDEMBOX antaro	290	More technical details	708		
TANDEMBOX plus	394				
CABLOXX	594				
Accessories	328				
TIP-ON BLUMOTION synchronisation linkage fixing	402				
Base support bracket	402				
Front/base stabiliser	403				
Cabinet profile fixing positions	334				

Short URL

www.blum.com/a370