

R6E8A Pressure Reference Report

Current direct upload through Aug 4, 2026, 2:24 AM Eastern

HDF PRESSURE - PRIMARY CHANNEL

INFRASOUND DETECTED

Share of current uploaded HDF signal energy inside the ISO 7196 infrasound method band.

90%

CURRENT RECOMMENDATION

TIER 2

Intermittent

Highest published-guide index: 172%

100% equals the named guide in threshold panels. ISO shows the recorded-energy share inside its method scope.

1 - ISO 7196

Infrasound method scope

90%

Recorded-energy share inside the published method band.

2 - ANSI/ASA + ASHRAE

Hotel-room RC screen

172%

Highest HDF index across instrument-supported RC-30 bands.

3 - DEFRA NANR45

Low-frequency curve

46%

Highest HDF index across instrument-supported NANR45 bands.

4 - WHO + ISO 1996

Night contribution

12%

Instrument-supported low-frequency contribution to the bedroom reference.


CURRENT SUPPLIED FILES

HDF file integrity	100%	EHZ file integrity	100%
Highest outside-guide index	172%	Verified above-guide share	36%

HDF supplies every acoustic percentage. EHZ remains an independent vertical-motion record.

Pressure Index, Tiers and Archive

Direct-upload result with fixed outside-guide lines

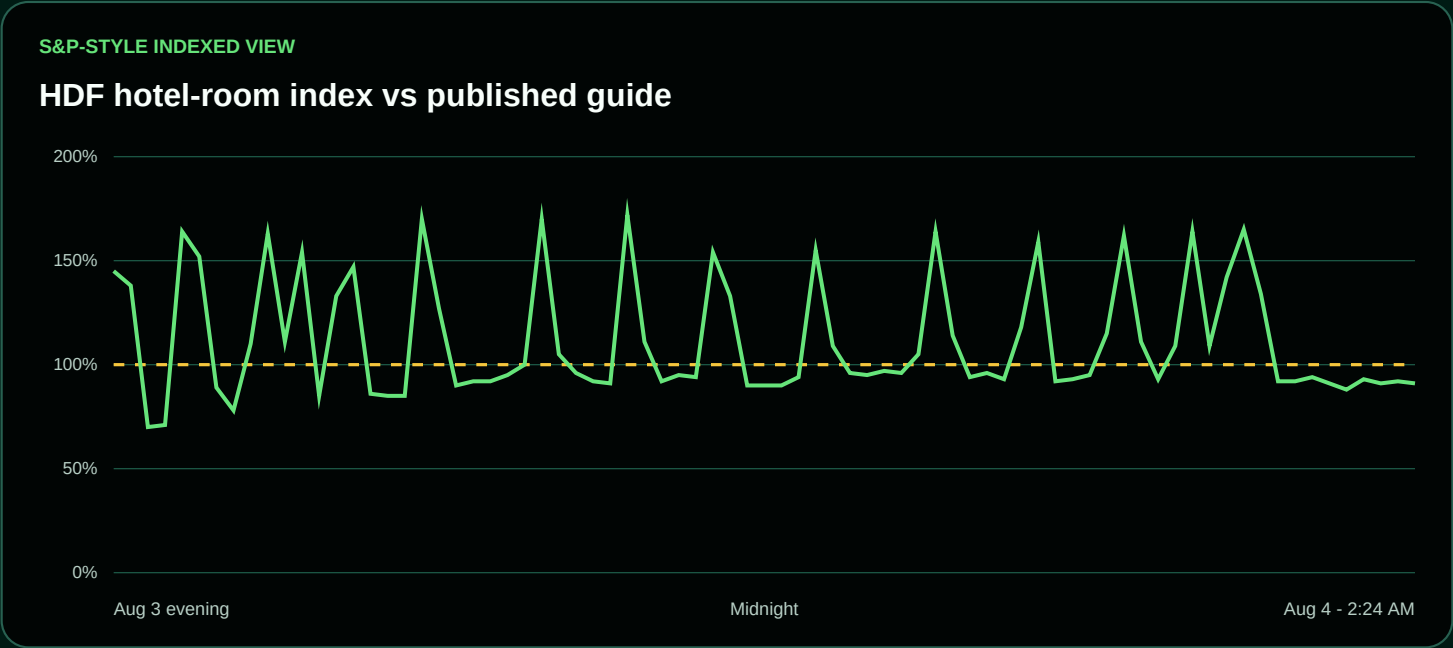

FOUR-TIER ACTION FRAMEWORK

TIER 1

Within guide

At or below 100%

TIER 2

Intermittent

Current recommendation

TIER 3

Prolonged

Elevated follow-up

TIER 4

Extended

Priority investigation

ARCHIVE SCOPE

April 12, 2026 - Ongoing

The original archive scope is preserved. The current four-guide index uses the newest direct HDF upload.

READING CONTROLS

HDF pressure leads. EHZ stays separate. Every percentage uses a named outside guide. Tier 2 includes the manufacturer sensitivity tolerance.

SOURCE AND SCOPE

*This data may lag. For personal verification, source data can be found through Raspberry Shake FDSN. The displayed percentages index supplied instrument records against published guidance; a complete room evaluation adds complementary full-band instrumentation and site context.