
Figure 6 | RX evidence, with all observed outcomes

19 Dec 2010 12:00 to 20 Dec 2010 20:00 UTC | 40 m | Target KP4MD | Reference WB6RQN

A Published source and reconciled direction

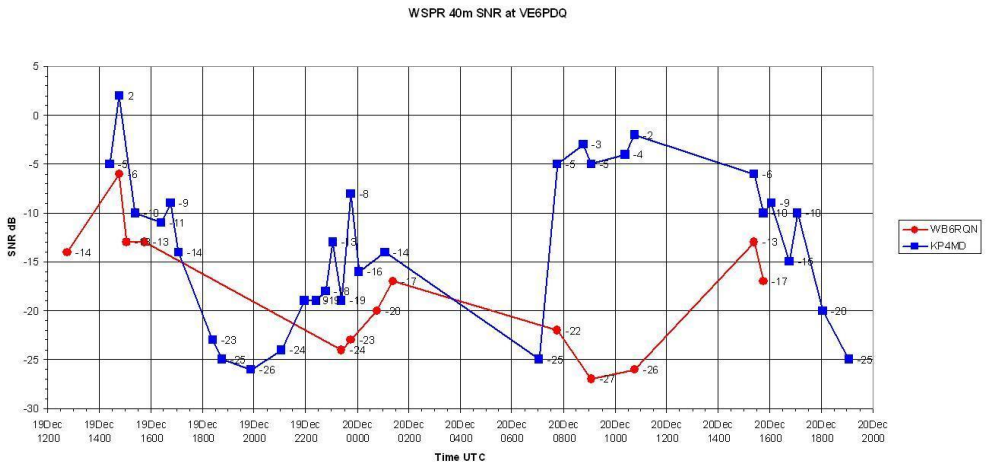


Archive endpoints: VE6PDQ transmits; KP4MD and WB6RQN receive. The original printed direction is inconsistent with those identities. All 44 visible markers reconcile to the 44 supplied source rows.

Power scale: reconstruction uses common 5 W to match the publication. Joint differences use common 1 W; the common 7 dB shift cancels. Positive ΔSNR favors KP4MD.

Historical replay: these reports do not prove that both systems operated in every retained cycle. One-sided outcomes describe coverage, without identifying inactivity, propagation or decode weakness as the cause.


Referenced publication: Carol F. Milazzo / KP4MD (2011).
Using the Weak Signal Propagation Reporter Network to Compare Antenna Performance
Amateur-radio technical article and club presentation · 2011. Source figure: Figure 6.
https://www.qsl.net/kp4md/wspr.htm
Original source pixels and v1 files remain unchanged.

B Complete reconstruction at the paper power scale

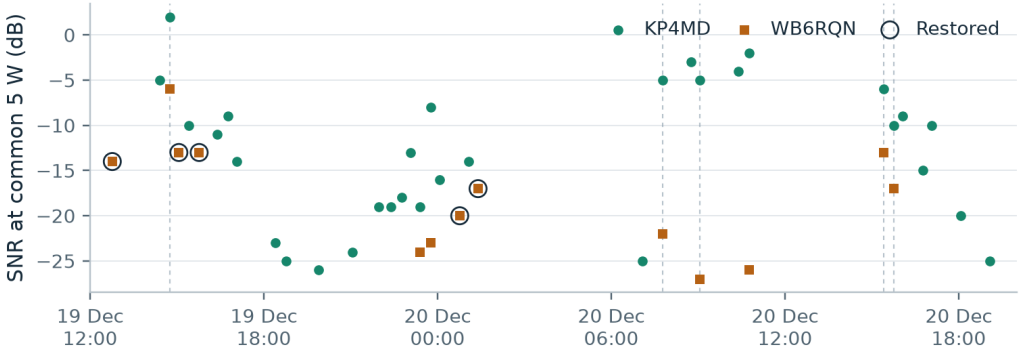

44 endpoint reports; 5 newly retained WB6RQN reports are ringed. Dashed guides identify exact same-cycle, full-locator Joint pairs.

C Joint ΔSNR remains unchanged

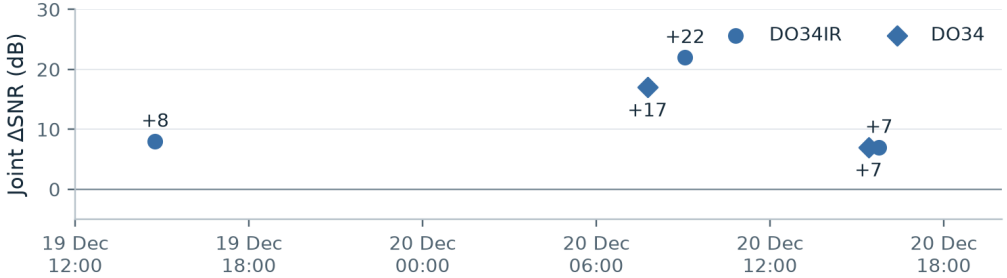


DO34IR: 3 pairs (+8, +22, +7 dB), median +8 dB.
DO34: 2 pairs (+17, +7 dB), median +12 dB.
All five pairs: median +8 dB. Keep full locators separate.

Figure 6 | Coverage restored, with exact report traceability

19 Dec 2010 12:00 to 20 Dec 2010 20:00 UTC | 40 m | Target KP4MD | Reference WB6RQN

Evidence scope	T only	Joint	R only	Units	Reports
Earlier gated selection	26	5	3	34	39
Complete observed union	26	5	8	39	44

Counts in Target-only / Joint / Reference-only order.
DO34IR: 8/3/2 → 8/3/5; DO34: 18/2/1 → 18/2/3.
Only the supplied VE6PDQ path is reconstructed. Other transmitters may supply additional activity witnesses in a full archive query.

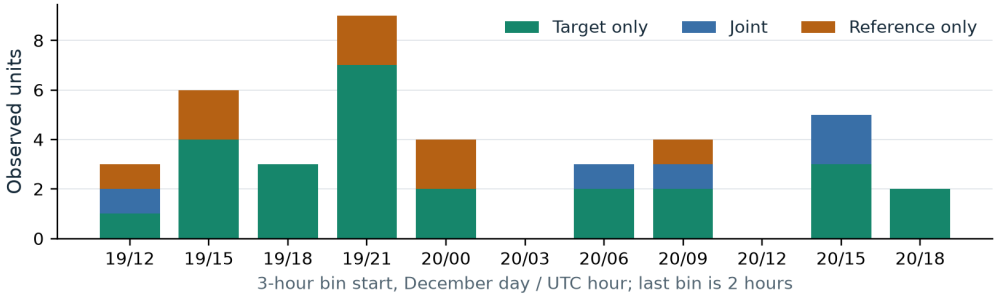

Restored reports: 5 Reference-only outcomes, no invented ΔSNR

Archive ID / source key	UTC (Dec 2010)	Peer locator	Reported SNR	Power	SNR at 1 W
wb6rqn:13	19 12:46	DO34	-14 dB	37 dBm	-21 dB
wb6rqn:11	19 15:04	DO34	-13 dB	37 dBm	-20 dB
wb6rqn:10	19 15:46	DO34IR	-13 dB	37 dBm	-20 dB
wb6rqn:2	20 00:46	DO34IR	-20 dB	37 dBm	-27 dB
wb6rqn:1	20 01:24	DO34IR	-17 dB	37 dBm	-24 dB

RX source exports do not contain archive IDs: wb6rqn:N is the stable row key in the supplied WB6RQN TSV. All five restored rows were excluded by the earlier gate within this bounded supplied path. This does not establish global receiver inactivity.

Counting rule: a native unit is one 120-second cycle and exact remote callsign/full locator. Joint has two endpoint reports; each one-sided unit has one. Therefore 39 units = 26 + 5 + 8, and 44 reports = 26 + 2×5 + 8. Cycles with neither endpoint decoded are unobserved.

Paired source traceability (all unchanged): the companion Joint ledger lists timestamp, full locator, both source keys and normalized SNR. Marker reconciliation stays separate from paired evidence. The old gate is an archival comparison only; current coverage includes every observed outcome in the stated scope.