WSPRadar.org reconstruction & comparison


Reconciled TX direction: KP4MD / WB6RQN transmitting to VE6PDQ

Referenced publication: Carol F. Milazzo / KP4MD (2011). *Using the Weak Signal Propagation Reporter Network to Compare Antenna Performance.*

Source figure: **Figure 7** · Amateur-radio technical article and club presentation · 2011

Demo: Historical TX replay | 40 m | 19 Dec 2010 12:00 to 20 Dec 2010 20:00 UTC | KP4MD / WB6RQN to VE6PDQ (DO34IR) | Reference correction 0 dB

Panel A - Original image from publication

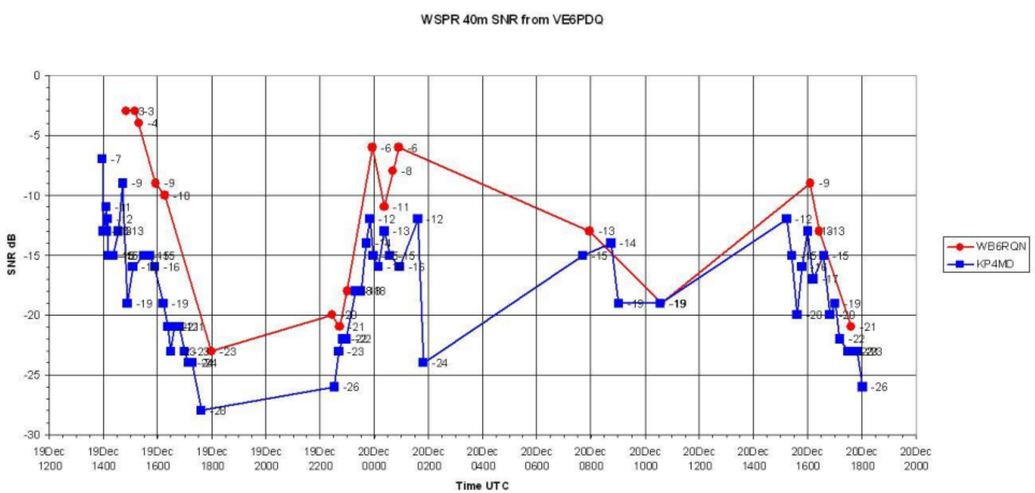

Original image retained; matched reports establish the direction shown in the header.

47 paper anchors reconcile exactly in SNR. Panel B shows all 76 endpoint reports from the database in this path and time window.

Common 37 dBm scale: KP4MD 5 W reports are unchanged; WB6RQN 2 W reports gain 4 dB. This scale is inferred from the matched reports.


Original dots and lines remain at full opacity beneath the colored circles. Exact database timestamps are used; no fitted time shift or SNR offset.

Panel C retains native 3h bins, density, median and IQR. Read the dB labels on its median-centered nonlinear axis; positive ΔSNR favors KP4MD.

One Joint Spot at -2 dB cannot establish a time trend.


Historical replay: observed coverage and differing operating schedules do not establish controlled antenna gain. Page 2 reconciles the native temporal coverage and counts.

Panel B - Reconstruction

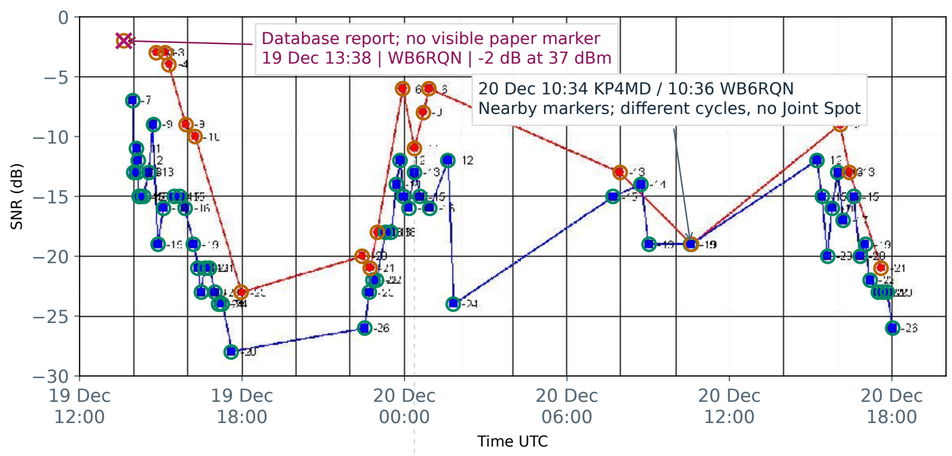

Panel C - WSPRadar paired ΔSNR

1 Joint Spot | KP4MD - WB6RQN | exact full locator identity

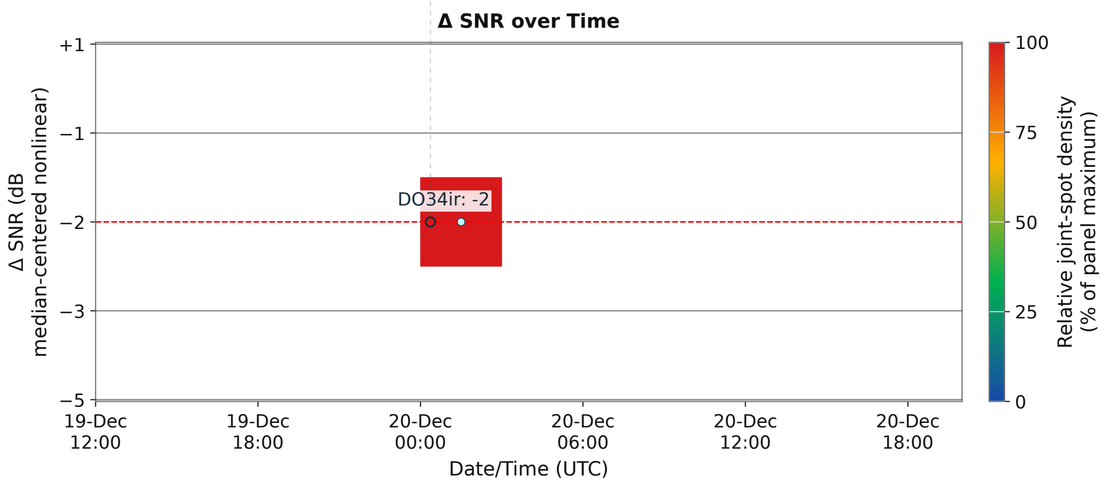

Circles: exact Joint Spots; labels: full locator and ΔSNR. Dashed guides identify their two reports.

WSPRadar.org reconstruction & comparison

Observed TX coverage over time: counts and ΔDecode


Referenced publication: Carol F. Milazzo / KP4MD (2011). *Using the Weak Signal Propagation Reporter Network to Compare Antenna Performance.*

Source figure: **Figure 7** · Amateur-radio technical article and club presentation · 2011

Demo: Historical TX replay | 40 m | 19 Dec 2010 12:00 to 20 Dec 2010 20:00 UTC | KP4MD / WB6RQN to VE6PDQ (DO34IR) | Reference correction 0 dB

Overview · same-cycle, full-locator outcomes

Selected identity	Only T	Joint	Only R	T reports	R reports	Units	Reports	ΔDecode (×)
VE6PDQ / DO34IR	56	1	18	57	19	75	76	3.00×

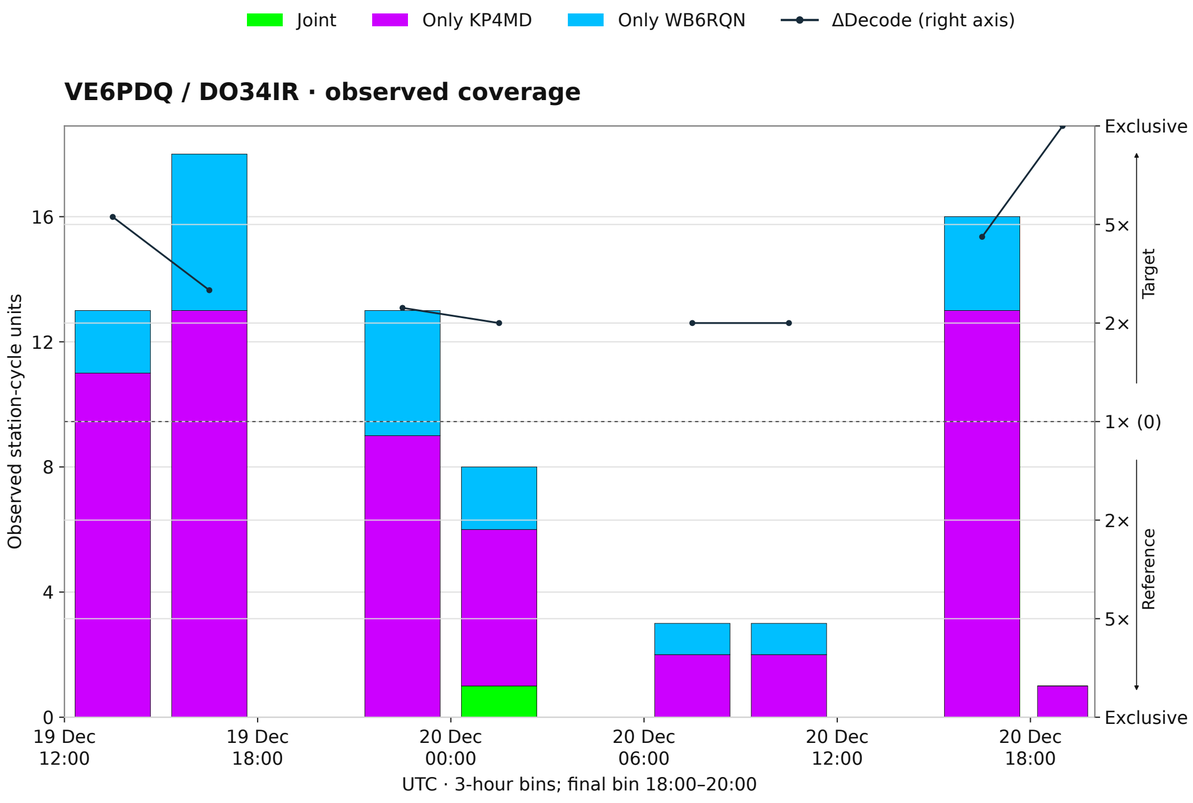

VE6PDQ / DO34IR · exact bin counts

UTC bin	Only T	Joint	Only R	T	R	Units	ΔDecode (×)
19 Dec 12:00–15:00	11	0	2	11	2	13	5.50×
19 Dec 15:00–18:00	13	0	5	13	5	18	2.60×
19 Dec 18:00–21:00	0	0	0	0	0	0	
19 Dec 21:00–00:00	9	0	4	9	4	13	2.25×
20 Dec 00:00–03:00	5	1	2	6	3	8	2.00×
20 Dec 03:00–06:00	0	0	0	0	0	0	
20 Dec 06:00–09:00	2	0	1	2	1	3	2.00×
20 Dec 09:00–12:00	2	0	1	2	1	3	2.00×
20 Dec 12:00–15:00	0	0	0	0	0	0	
20 Dec 15:00–18:00	13	0	3	13	3	16	4.33×
20 Dec 18:00–20:00	1	0	0	1	0	1	∞×

T = Only T + Joint; R = Only R + Joint; table ΔDecode = T / R: 1.00× equal, ∞× Target only, 0.00× Reference only; blank = unobserved. Right-axis factors name the favored side.

Historical replay: only observed outcomes are counted; cycles with neither endpoint decoded are unobserved. Operating schedules and path conditions prevent interpreting coverage imbalance as antenna gain.