

WSPRadar.org reconstruction & comparison


Reconciled TX direction: KP4MD / WB6RQN transmitting to VE6PDQ

Referenced publication: Carol F. Milazzo / KP4MD (2011). *Using the Weak Signal Propagation Reporter Network to Compare Antenna Performance*.

Source figure: **Figure 7** · Amateur-radio technical article and club presentation · 2011


Demo: 19 December 2010 12:00-20 December 2010 20:00 UTC · 40 m · Target KP4MD – Reference WB6RQN

Panel A - Original image from publication

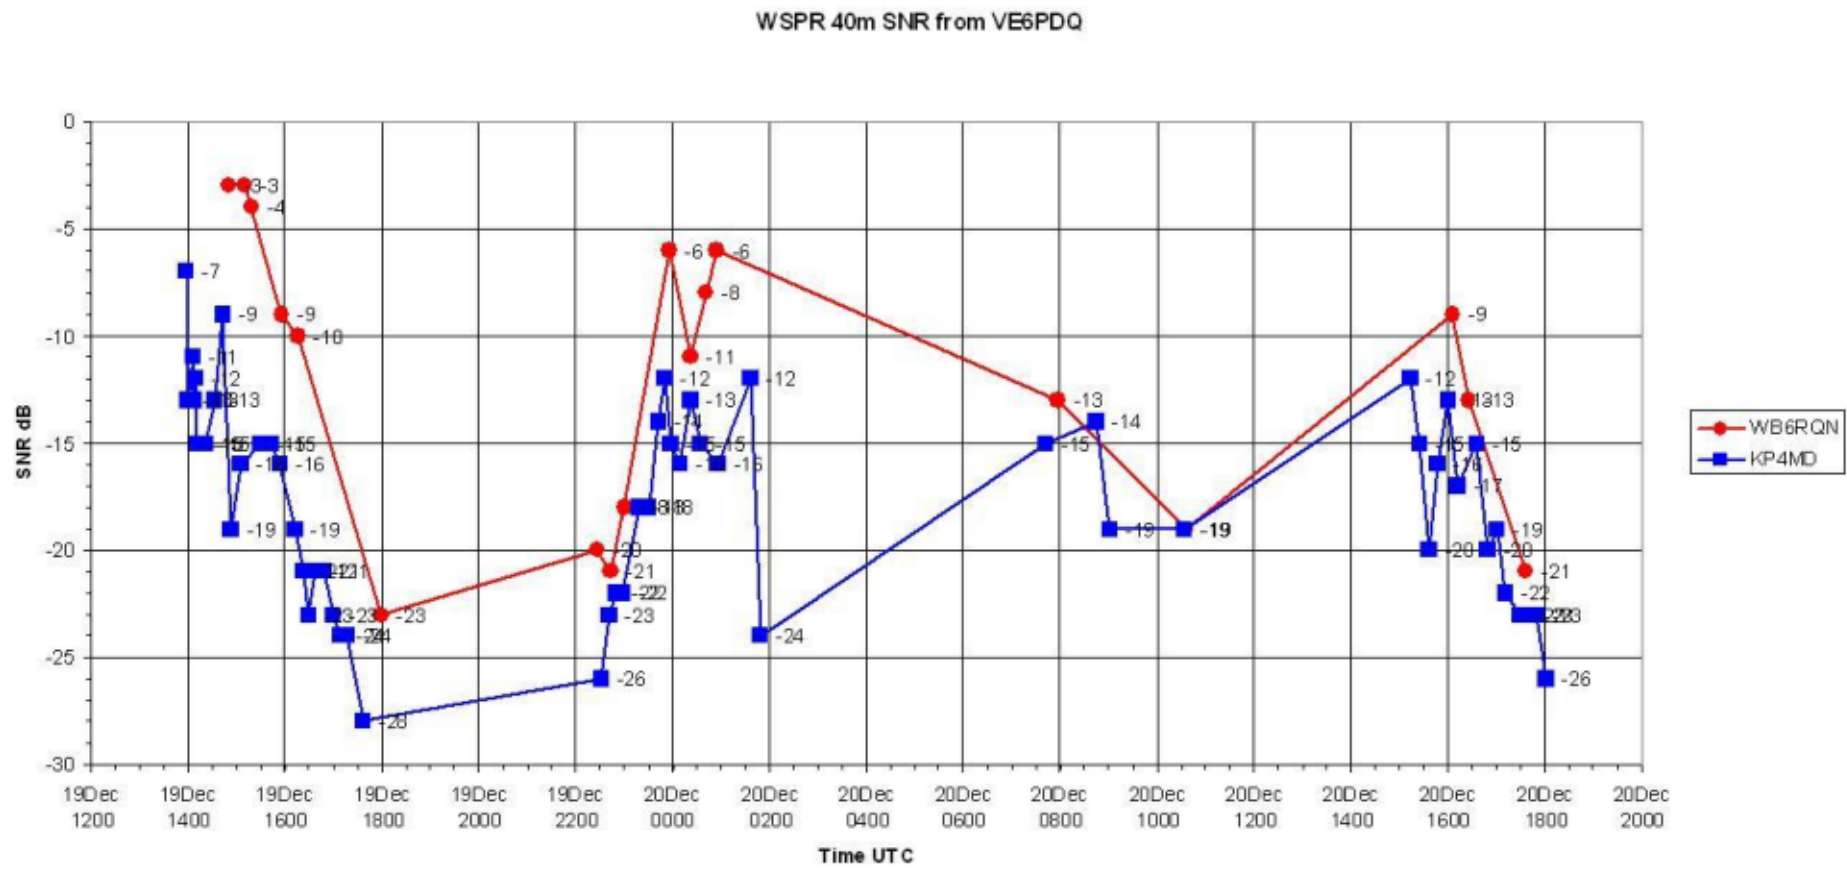


Original publication image retained in Panel A;
its printed direction is contradicted by the matched reports.

Panel C - WSPRadar view

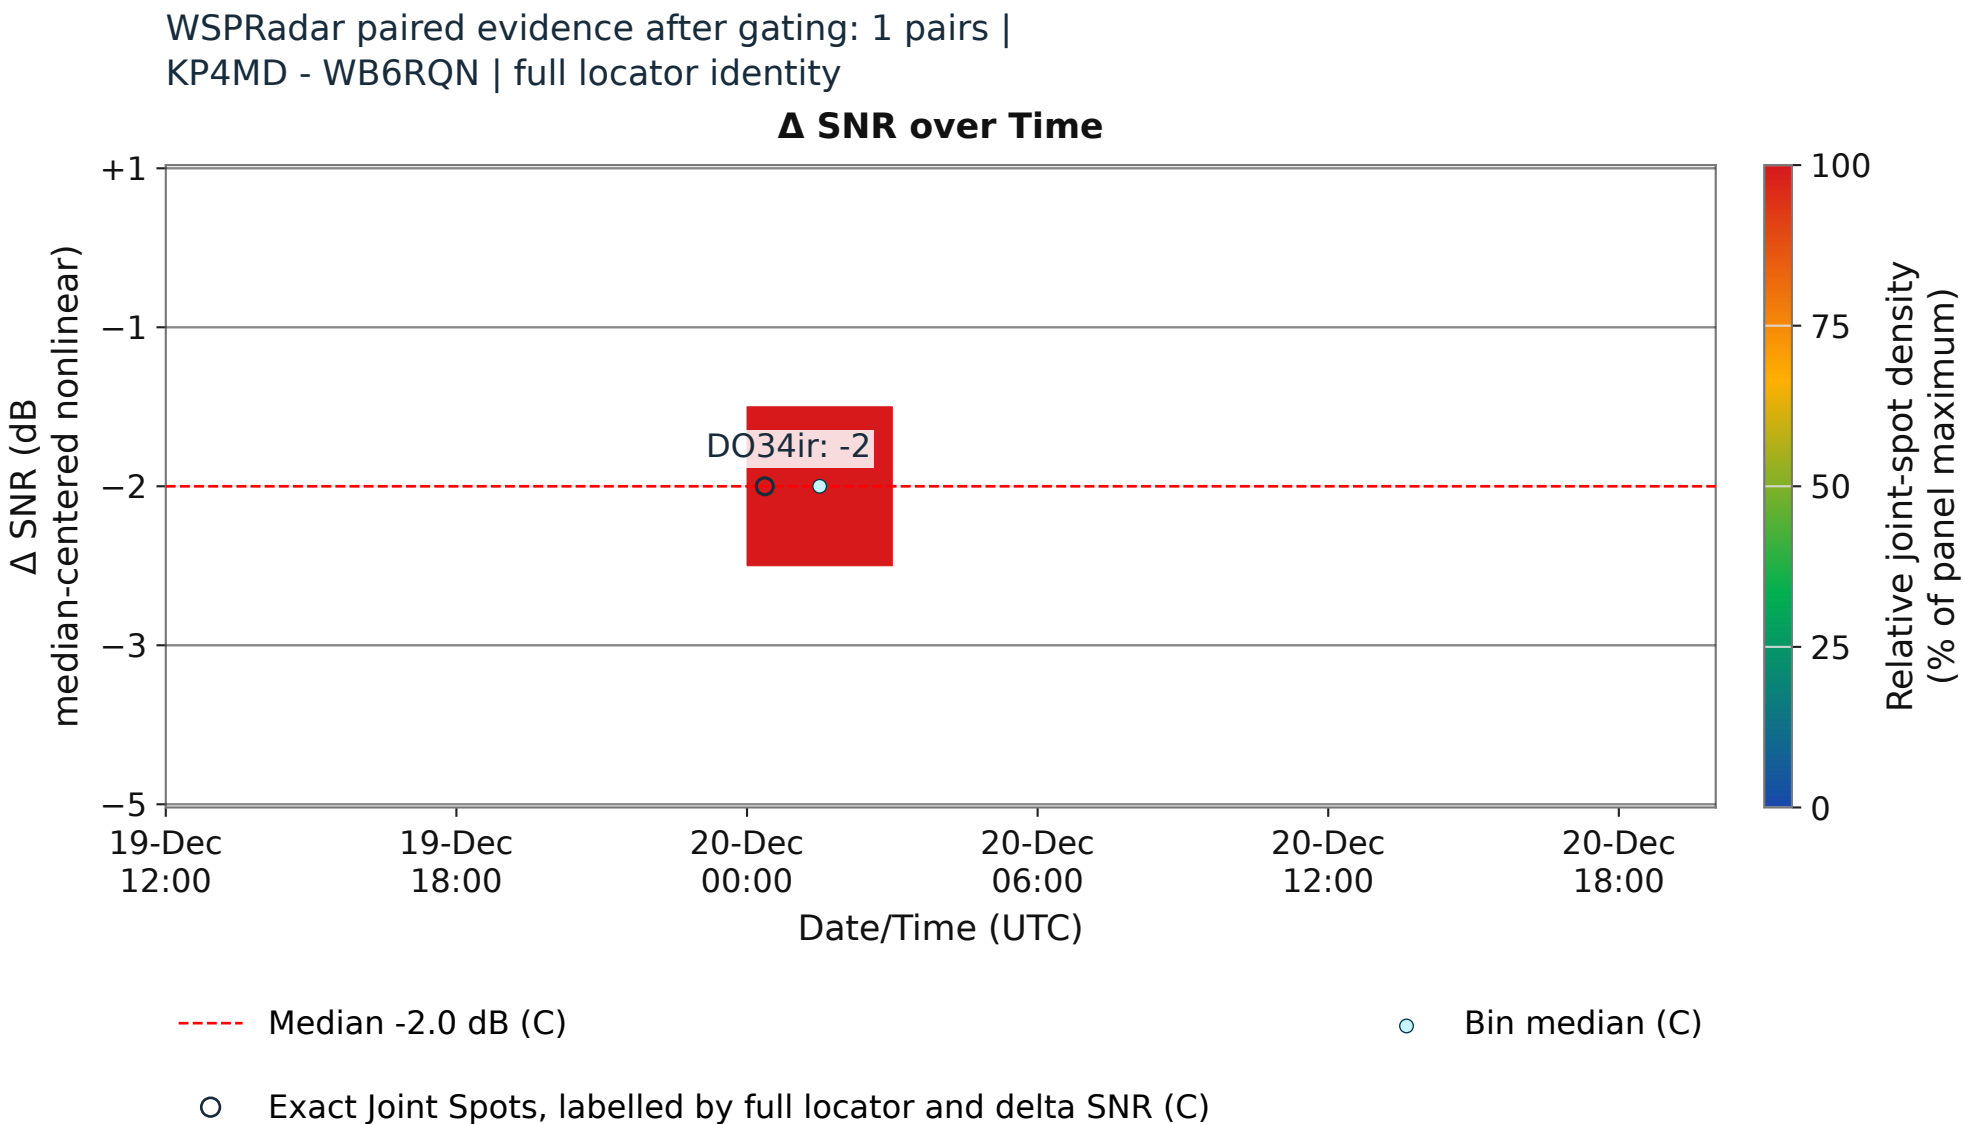

Panel B - Reconstruction

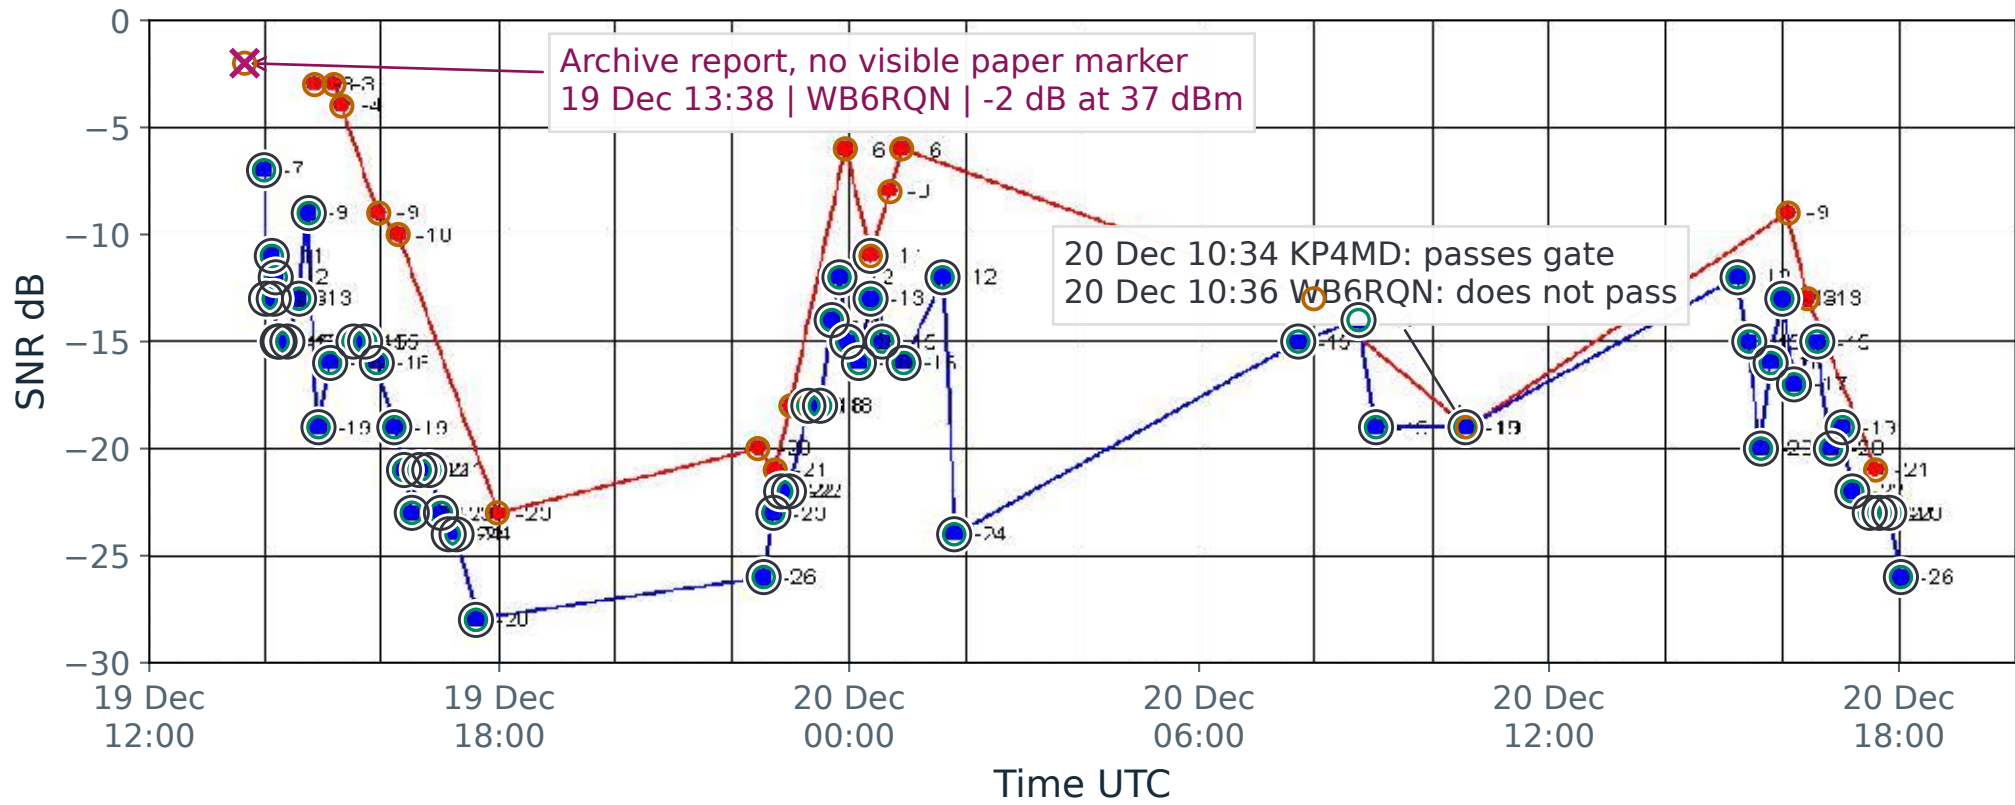

- Pre-gate SQL diagnostic: KP4MD (B)
- Pre-gate SQL diagnostic: WB6RQN (B)
- Outer ring: retained by production gate and Inspector (B)

47 / 47 compact paper anchors match exactly in SNR. All 76 archived TX reports in the plotted window are reconstructed in Panel B.

Common 37 dBm scale: KP4MD raw SNR unchanged; WB6RQN 2 W reports gain 4 dB.

Outer rings: 58/76 reports pass the gate (57 KP4MD + 1 WB6RQN). Gate survival does not imply a Joint pair.

Panel C retains native 3h bins, relative density, median and IQR. Read the dB labels on its median-centered nonlinear axis; positive values favor KP4MD.

Panel B: original dots and lines at full opacity beneath colored pre-gate SQL circles. Outer rings and Panel C pairs: current production gate, map and Inspector results.

Gate counts refer only to 19 Dec 12:00-20 Dec 20:00 UTC. Target activity is checked across all captured receivers in the exact WSPR cycle.

One Joint Spot gives one populated density cell at -2 dB; it cannot establish a time trend or direction-independent antenna gain.

Source: qsl.net/kp4md/wspr.htm | Current generated WSPRadar SQL executed offline through the regression SQLite adapter; not native ClickHouse.