设计印刷 0577-86068468

鑫德裕

Deyu Shoe-Making Machinery

德裕机械

Maximize Value for Customer

温州德裕机械有限公司

Wenzhou Deyu Machinery Co., Ltd.

鑫德裕

温州德裕机械有限公司

Wenzhou Deyu Machinery Co., Ltd.

地址: 温州市瓯海区娄桥街道上汇工业区中汇路201号

ADD: No.201 Zhonghui Rd., Shanghui Industrial Area,Ouhai District,Wenzhou

电话/Tel: +86-577-88753688　手机/MB: +86 138 5777 1658

邮箱/E-mail: 496872115@qq.com　网址/http: www.wzdeyu.c m

alibaba: wzdeyu.en.alibaba.com

COMPANY PROFILE
公司简介

温州德裕机械有限公司是一家集设计、制造和销售为一体的专业制鞋设备制造商。主要生产单色、双色、三色、四色及混色圆盘注射成型机系列、双色圆盘注射成型机系列、TR/TPU圆盘式及立式注射成型机系列、TRB单色、双色圆盘式注射系列、伺服系列等。产品技术含量高，制造工艺独特，质量稳定可靠，在制鞋行业声誉卓著，是国内许多制鞋厂和鞋材厂的主要或独家配套供应商。公司拥有一批经验丰富，精力充沛，具有一流自主开发水平的专业技术队伍，目前公司生产的产品大部分获得专利。雄厚的技术实力受到了许多国外知名制鞋企业的青睐。 公司还拥有一个精诚团结、吃苦耐劳，诚信务实、朝气蓬勃、开拓进取的营销和服务队伍。公司始终如一贯彻的核心理念是品质，并将品质融入企业运行的每一环节，赋予现实的表现。公司导入质量运行体系，进行科学管理，信任员工的努力和奉献，尊重员工的劳动和权利，为员工创造良好的工作环境和发展平台；金工、冲压、装配等生产流水线齐全，检测手段完善，从而确保了较大的生产能力和产品质量的稳定可靠，努力为客户提供高质量的专业化产品和服务，以真诚和精品赢得他们的尊重和信赖。

公司将一如既往以最优质的鞋机设备奉献于鞋行业，致力于使我们成为产业的领导者和顾客首选的业务配套与合作伙伴，致力打造成业内一流的鞋机品牌。

Wenzhou Deyu Machinery Co., Ltd. is located in the famous shoes city wenzhou,shanghui industry area.Our enterprise is specialized in producing automatic soles injection moulding machines and other shoe making machines.As a high-tech company,Deyu Machinery has professional engineers and skilled workers focus on researching and developing high quality,reliable shoe-making machines for more than 15 years. "Maximize value for customer,provide most considerate service for customer" is our enterprise purpose.

Deyu Machinery is strict in quality management.In our multi-varieties and continuous mass production,the strict quality system is vital for stable quality of products.We have many patents for our machines and core technology.Our diversified products have been issued national production licence and certificate of competency,and have been passed the ISO9001:2000 quality certification system and CE certificate of Europe.

Our machines enjoy high reputation in domestic market and foreign market. Many famous local shoes companies or shoes accessories companies select or specified using our machine for ensuring the quality of final products.Now we also enlarge our customers to Brazil,Argentina,Mexico,Colombia,Russia,Turkey,Morocco,India,Pakistan,Iran,Bangladesh,Vietnam,Egypt,Nigeria and Cote d'Ivoire.

Our company has a professional,dedicated sales team to provide excellent service.Customer satisfaction and benefit is our prime consideration.Deyu Machinery sincerely looking forward to establishing and deepening cooperation with new and old customers!

Welcome to enquiry and contact with us!

企业荣誉
HONOR OF ENTERPRISE

加工车间

厂区一角

配件仓库

装配车间

资质与荣誉只是对我们能力的一种认可，
而我们还在不断追求.....

Qualification and honor present a recognition of professional competence.
But we are longing for.....

DY-1102H

全自动两工位（V型）滑板塑胶鞋底注射成型机

Full Automatic Two Position (V Block) Slide Plastic Rubber Soles Injection Moulding Machine

主要特点

- 专门生产热塑性塑胶原料PVC、TPR及TPU塑胶发泡、不发泡之鞋底，射出成型。
- 全自动电脑程序控制操作，不须专业人员即可胜任，节省人力及时间。噪声小、低转速高扭力油压马达驱动，无极变速压力特强。
- 螺杆采用特殊结构设计，射出量精确，产品质量稳定，并以电脑数字自动控制多站压力设压，可分2种不同份量射出成型。
- 采用节能伺服系统，节约用电量为30%以上。

FEATURES

- Suitable for thermoplastic raw material like PVC、TPR and TPU with or without foaming.
- Full automatic intelligent programmed control with low technique requirement for skilled worker/lower noise/use low rotating speed and high torque hydraulic motor, with powerful stepless speed change.
- The screw adopts special structural design, with accurate injection volume and stable product quality, and uses digital computer to automatically control multi-station pressure setting, which can be separately adjusted among stations.
- The energy-saving servo system can save electric power over 30% rather than the traditional equipment.

详细参数:

机器型号/Machine model DY-1102H

以下数据仅供参考，若因实际设计需求有所变更，恕不另行通知。
The following Data Are Only For Reference, If It Has Change Without Prior Notice.

单元说明	Model	单位unit	数据Date
螺杆直径	Injecting Screw Diameter	mm	Φ55
注射容量	Max.injecting Capacity	cm3/shot	470
夹模力	Mold Clamping Force	ton	150
射出压力	Max.injecting Pressure	kg/cm2	1050
生产量	Productivity Per Hour	pair/h	170
容模数	Work Station	station	2
容模尺寸	Mould Dimension	mm	500*360*180
总功率	Total Power	kw	33
机械尺寸	Machine Dimension(L*W*H)	m	3.9*2*2.5
机械重量	Machine weight	ton	8
用油量	Oil Capacity	L	450

DY-1106TR/TPU

全自动立式六工位水冷单色塑胶鞋底注射成型机

Fully Automatic Vertical Six Station Water Cooling One Color Plastic Rubber Soles Injection Moulding Machine

主要特点

- 专门生产热塑性塑胶原料PVC、TPR及TPU塑胶发泡、不发泡之鞋底射出成型底；
- 全自动电脑程序控制操作，不须专业人员即可胜任，噪声小、低转速高扭力油压马达驱动，无极变速等压力特强；
- 采用自动开关模机械手设置，降低劳动强度，同时降低员工配置要求，可使用女工或老年工，减少人工成本；
- 采用中央水冷装置，冷却时间快；
- 整体式结构设计，占地少；
- 生产量每小时80~120双；
- 采用节能伺服系统，节约电量约为30%以上；
- 大合模力，专门针对一模、一双模具。

FEATURES

- Applied in producing soles with thermoplastic raw material like PVC、TPR and TPU with or without foaming.
- Full automatic intelligent programmed control with low technique requirement for skilled worker/ lower noise/ use low rotating speed and high torque hydraulic motor,with powerful stepless speed change.
- Robotic arm equiped in automatic opening & clamping mould device can save labor force and decrease the requirement of worker. For female and old worker can operate the machine.
- The central cooling device has good cooling efficiency.
- Compact structure design, less space required.
- The production output is about 80~120 pairs/h.
- Strong clamping force,specifically for once, a paie of molds.

详细参数:

机器型号/Machine model DY-1106TR/TPU

以下数据仅供参考，若因实际设计需求有所变更，恕不另行通知。
The following Data Are Only For Reference, If It Has Change Without Prior Notice.

单元说明	Model	单位unit	数据Date
工位数	Work Station	station	6
螺杆直径	Injecting Screw Diameter	mm	Φ50
注射容量	Max.Injecting Capacity	cm3/shot	390
夹模力	Clamping Force	ton	150
射出压力	Max.Injecting Pressure	kg/cm2	1300
生产量	Productivity Per Hour	pair/h	80-120
容模尺寸	Mould Dimension	mm	500×340×170
总功率	Total Power	kw	33kw
机械尺寸	Machine Dimension(L*W*H)	m	2.8×2.1×2.9
机械重量	Machine Weight	ton	7
用油量	Oil Capacity	L	500

DY-1112TR/TPU

全自动TR/TPU水冷单色塑胶鞋底注射成型机

Fully Automatic Four Station Water Cooling One Color Plastic Rubber Soles Injection Moulding Machine

主要特点

- 专门生产热塑性塑胶原料PVC、TPR及TPU塑胶发泡、不发泡之鞋底射出成型底；
- 全自动电脑程序控制操作，不须专业人员即可胜任，噪声小、低转速高扭力油压马达驱动，无极变速等压力特强；
- 采用自动开关模机械手设置，降低劳动强度，同时降低员工配置要求，可使用女工或老年工，减少人工成本；
- 采用中央水冷装置，冷却时间快；
- 整体式结构设计，占地少；
- 生产量每小时80~120双；
- 采用节能伺服系统，节约电量约为30%以上。

FEATURES

- Applied in producing soles with thermoplastic raw material like PVC、TPR and TPU with or without foaming.
- Full automatic intelligent programmed control with low technique requirement for skilled worker/ lower noise/ use low rotating speed and high torque hydraulic motor,with powerful stepless speed change.
- Robotic arm equiped in automatic opening & clamping mould device can save labor force and decrease the requirement of worker. For female and old worker can operate the machine.
- With central water cooling device,the cooling time is fast.
- Compact structure design, less space required.
- The production output is about 80~120 pairs/h
- The energy-saving servo system can save electric power over 30% rather than the traditional equipment.

详细参数:

机器型号/Machine model	DY-1112TR/TPU	以下数据仅供参考，若因实际设计需求有所变更，恕不另行通知。The following Data Are Only For Reference, If It Has Change Without Prior Notice.		
单元说明	Model	单位unit	数据Date	
工位数	Work Station	station	6	12
螺杆直径	Injecting Screw Diameter	mm	Φ55	Φ55
注射容量	Max.Injecting Capacity	cm3/shot	470	470
夹模力	Clamping Force	ton	150	150
射出压力	Max.Injecting Pressure	kg/cm2	1050	1050
生产量	Productivity Per Hour	pair/h	80~120	80~120
容模尺寸	Mould Dimension	mm	500*340*170	500*340*170
总功率	Total Power	kw	33	33
机械尺寸	Machine Dimension(L*W*H)	m	4.5*2*2	5.5*2.2*2
机械重量	Machine Weight	ton	6.5	8
用油量	Oil Capacity	L	450	450

DY-2216TR/TPU

全自动圆盘式TR/TPU双色塑胶鞋底注射成型机

Full Automatic Rotary Type Two Color Plastic Rubber Soles Injection Moulding Machine

主要特点

- 专门生产热塑性塑胶原料PVC、TPR及TPU塑胶发泡、不发泡之鞋底，射出成型。
- 全自动电脑程序控制操作，不须专业人员即可胜任，节省人力及时间。噪声小、低转速高扭力油压马达驱动，无极变速压力特强。
- 螺杆采用特殊结构设计，射出量精确，产品质量稳定，并以电脑数字自动控制多站压力设压，可分16种不同份量射出成型。
- 采用节能伺服系统，节约用电量为30%以上。

FEATURES

- Suitable for thermoplastic raw material like PVC、TPR and TPU with or without foaming.
- Full automatic intelligent programmed control with low technique requirement for skilled worker/lower noise/use low rotating speed and high torque hydraulic motor, with powerful stepless speed change.
- The screw adopts special structural design, with accurate injection volume and stable product quality, and uses digital computer to automatically control multi-station pressure setting, which can be separately adjusted among stations.
- The energy-saving servo system can save electric power over 30% rather than the traditional equipment.

详细参数:

机器型号/Machine model DY-2216TR/TPU

以下数据仅供参考，若因实际设计需求有所变更，恕不另行通知。
The following Data Are Only For Reference, If It Has Change Without Prior Notice.

单元说明	Model	单位unit	数据data
工位数	Work Station	station	16
螺杆直径	Injecting Screw Diameter	mm	2×Φ55
注射容量	Max.Injecting Capacity	cm^3/shot	2×470
夹模力	Clamping Force	ton	150
射出压力	Max.Injecting Pressure	kg/cm^2	1050
生产量	Productivity Per Hour	pair/h	60-80
容模尺寸	Mould Dimension	mm	500×320×170
总功率	Total Power	kw	60
机械尺寸	Machine Dimension(L×W×H)	m	9.5×4.5×2.2
机械重量	Machine Weight	ton	20
用油量	Oil Capacity	L	800×2

DY-2212TPU/TR

全自动圆盘式TPU/TR双色塑胶鞋底注射成型机

Full Automatic Rotary Type Two Color Plastic Rubber Soles Injection Moulding Machine

主要特点

- 中心水冷，快速冷却模具；
- 原料方面适用于生产热可塑性塑胶原料 TPU、TPR、TR 及 PVC 塑胶发泡、不发泡类鞋底；
- 全自动电脑程序控制操作、不须专业人员即可胜任，节省人力及时间；
- 本机结构灵巧，重量轻，机架的设计更适合工人操作；
- 油路电控搭配无间，减少等待时间，生产速度快，提高产量，减少耗能；
- 电机油泵外置、散热效果更佳，从而延长机器的使用寿命；
- 150 吨大合模力；

FEATURES

- Water-cooled central system, quick cooling of molds;
- Suitable for producing thermoplastic elastomers TPR, TR, and TPU foam and non-foam shoe soles;
- Fully automated computer program control operation, no specialized personnel required, saving labor and time;
- The machine structure is compact, lightweight, and the frame design is more suitable for worker operation;
- The oil circuit and electrical control are well-matched, reducing waiting time, increasing production speed, improving output, and reducing energy consumption;
- The motor oil pump is external with better heat dissipation, thereby extending the machine's lifespan;
- 150 tons of clamping force;

详细参数:

机器型号/Machine model	DY-2212TPU/TR	以下数据仅供参考，若因实际设计需求有所变更，恕不另行通知。The following Data Are Only For Reference, If It Has Change Without Prior Notice.

单元说明	Model	单位unit	数据data
工位数	Work Station	station	12
螺杆直径	Injecting Screw Diameter	mm	Φ55/Φ55
注射容量	Max.Injecting Capacity	cm³/shot	500/500
夹模力	Clamping Force	ton	150
射出压力	Max.Injecting Pressure	kg/cm²	1300/1300
生产量	Productivity Per Hour	pair/h	80-120
容模尺寸	Mould Dimension	mm	500×340×180
总功率	Total Power	kw	66
机械尺寸	Machine Dimension(L×W×H)	m	8×4×2.2
机械重量	Machine Weight	ton	20
用油量	Oil Capacity	L	800*2

DY-150

全自动直立式TR/TPU注射成型机

Automatic Vertical Two Color TR/TPU Injection Moulding Machine

主要特点

- 可产TR/TPR/TPU等多种热塑性材料。
- 直压式合模系统，快速锁模结构。
- 0~90º~180º翻转结构，提供多种生产模式，可生产单色、双色鞋底。
- 模具高度自动调节，容模空间80-200mm。
- 整体式油箱、电控柜、占地面积少、触控人机界面，易于操作。

FEATURES

- Suitable for thermoplastic raw material like TR、TPR and TPU.
- Vertically pressed hydraulic mould-close system,quickly mould-lock system.
- 0~90º~180º turnover structure available with several production modes, for both single and double color soles.
- The mould space can be automatically adjusted between 80-200mm.
- Integrative elecric control box and hydraulic system.Touchable screen man-manchine interface,making operation convenient.

详细参数:

机器型号/Machine model DY-150

以下数据仅供参考，若因实际设计需求有所变更，恕不另行通知。
The following Data Are Only For Reference, If It Has Change Without Prior Notice.

单元说明	Model	单位unit	数据data
螺杆直径	Diameter Of Screw	mm	Φ55×4
夹模力	Clamping Force	ton	150
开模行程	Mould-Opening Stroke	mm	370
容模尺寸	Mould Dimension	mm	480x550
标准模厚	Thickness Of Mould	mm	80-200
最大射出量	Injection Cap.(max)	cc	1000
总功率	Total Power	kw	38
用油量	Oil Capacity	L	600
机械尺寸	Machine Dimension(L×W×H)	m	2.2x2.7x2.6
机器重量	Machine Weight	ton	10

DY-1120A

全自动圆盘式单色塑胶鞋底注射成型机

Full Automatic Rotary Type One Color Plastic Rubber Soles Injection Moulding Machine

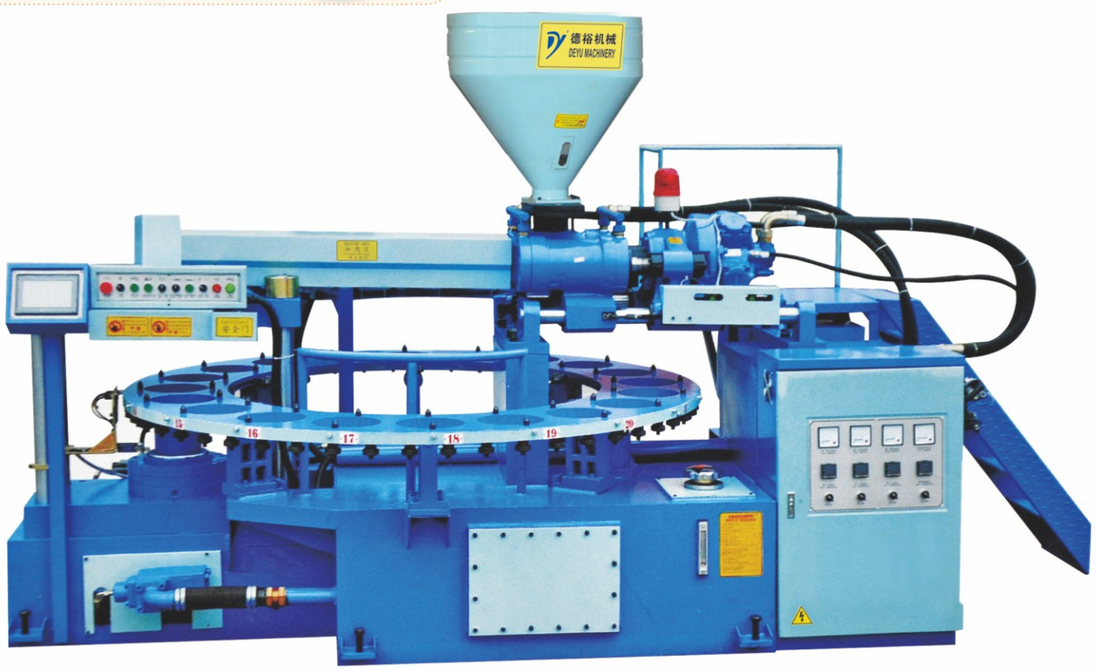

主要特点

- 专门生产热塑性塑胶原料PVC、TPR及TPU塑胶发泡、不发泡之鞋底，射出成型。
- 全自动电脑程序控制操作，不须专业人员即可胜任，节省人力及时间。噪声小、低转速高扭力油压马达驱动，无极变速压力特强。
- 采用大直径螺杆，原料射出量大，产量高，并以电脑数字自动控制多站压力设压，可分20种不同份量射出成型。
- 其生产量每小时约180双。

FEATURES

- Suitable for thermoplastic raw material like PVC、TPR and TPU with or without foaming.
- Full automatic intelligent programmed control with low technique requirement for skilled worker/lower noise/use low rotating speed and high torque hydraulic motor, with powerful stepless speed change.
- Use big size screw/ High production capacity/ The injection pressure of different stations can be set by computerized digital controller and 20 different injection volumes can be set.
- The production output is about 180 pair/h.

详细参数:

机器型号/Machine model **DY-1120A**

以下数据仅供参考，若因实际设计需求有所变更，恕不另行通知。
The following Data Are Only For Reference, If It Has Change Without Prior Notice.

单元说明	Model	单位unit	数据Date
工位数	Work Station	station	20
螺杆直径	Injecting Screw Diameter	mm	Φ75
注射容量	Max.Injecting Capacity	cm^3/shot	880
夹模力	Clamping Force	ton	55
射出压力	Max.Injecting Pressure	kg/cm^2	660
生产量	Productivity Per Hour	pair/h	180
容模尺寸	Mould Dimension	mm	400×200×160
总功率	Total Power	kw	33.3
机械尺寸	Machine Dimension(L×W×H)	m	4.2×2.1×2
机械重量	Machine Weight	ton	4.2
用油量	Oil Capacity	L	450

DY-2220A

全自动圆盘式双色塑胶鞋底注射成型机

Full Automatic Rotary Type Two Color Plastic Rubber Soles Injection Moulding Machine

主要特点

- 专门适于生产制造各类单色、双色运动鞋底，休闲鞋底，男、女鞋底及拖、凉鞋底等。
- 原料方面适于生产热可塑性塑胶原料PVC、TPR及TPU塑胶发泡、不发泡类。
- 全自动电脑程序控制操作，不须专业人员即可胜任，节省人力及时间。
- 本机结构灵巧，重量轻，机架的设计更适合工人操作。
- 本机液压系统采用高压高流量，使机器的效率更高，性能更可靠。
- 电机油泵外置，散热效果更佳，从而延长机器的使用寿命。
- 其生产量每小时约150双。

FEATURES

- Applied in producing various one/two colors soles of sport shoes, casual shoes, man/woman shoes, sandals etc.
- Suitable for thermoplastic raw material like PVC、TPR and TPU with or without foaming.
- Full automatic intelligent programmed control with low technique requirement for skilled worker. Saving labor and time.
- Compact structure design, light machine weight, the design of machine frame is suitable for operators.
- The hydraulic system has high pressure and flow, causing better efficiency and more reliable feature.
- The oil pump of the motor is outside placed, causing better cooling effect and longer duration of machine.
- The production output is about 150 pairs/h.

详细参数:

机器型号/Machine model	DY-2220A	以下数据仅供参考，若因实际设计需求有所变更，恕不另行通知。The following Data Are Only For Reference, If It Has Change Without Prior Notice.	
单元说明	**Model**	**单位unit**	**数据date**
工位数	Work Station	station	20
螺杆直径	Injecting Screw Diameter	mm	Φ75Φ65
注射容量	Max.Injecting Capacity	cm^3/shot	880/660
夹模力	Clamping Force	ton	55
射出压力	Max Injecting Pressure	kg/cm^2	660/890
生产量	Productivity Per Hour	pair/h	150
容模尺寸	Mould Dimension	mm	500×320×250
总功率	Total Power	kw	60
机械尺寸	Machine Dimension(L×W×H)	m	7.5×5.8×2.2
机械重量	Machine Weight	ton	12
用油量	Oil Capacity	L	800×2

DY-3220C

全自动圆盘式两头三色塑胶鞋底注射成型机

Full Automatic Rotary Type Three Color Plastic Soles Injection Moulding Machine

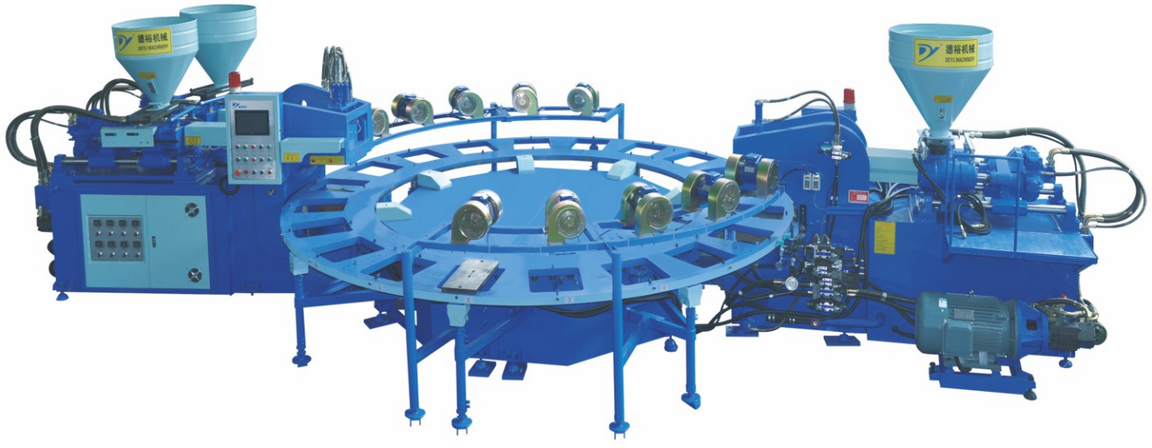

主要特点

- 专门适于生产制造各类双色、三色童鞋、运动鞋底、休闲鞋底，男、女鞋底及拖、凉鞋底等。
- 原料方面适用于生产热可塑性塑胶原料PVC、TPR及TPU塑胶发泡、不发泡类。
- 全自动电脑程序控制操作、不须专业人员即可胜任，节省人力及时间。
- 本机结构灵巧，重量轻，机架的设计更适合工人操作。
- 油路电控搭配无间，减少等待时间，生产速度快，提高产量，减少耗能。
- 电机油泵外置、散热效果更佳，从而延长机器的使用寿命。
- 其生产量每小时约220双。

FEATURES

- Applied in producing various two/three colors soles of child' s shoes, sport shoes, casual shoes, man/woman shoes, sandals etc.
- Suitable for thermoplastic raw material like PVC、TPR and TPU with or without foaming.
- Full automatic intelligent programmed control with low technique requirement for skilled worker. Saving labor and time.
- Compact structure design, light machine weight, the design of machine frame is suitable for operators.
- The electronic control system is quick in respond, less waiting time,more production capacity and less energy consumption.
- The oil pump of the motor is outside placed, causing better cooling effect and longer duration of machine.
- The production output is about 220 pairs/h.

详细参数:

机器型号/Machine model	DY-3220C	以下数据仅供参考，若因实际设计需求有所变更，恕不另行通知。The following Data Are Only For Reference, If It Has Change Without Prior Notice.

单元说明	Model	单位unit	数据date
工位数	Work Station	station	12/20
夹模力	Clamping Force	ton	55/80
容模尺寸	Mould Dimension	mm	400×320×175
螺杆直径	Diameter of Screw	mm	Φ65/2× Φ60
螺杆直径比	Screw L/D Ratio	L/D	21/20
最大射程	Max.Injection Capacity	mm	195/167
射出压力	Injection Pressure	MPa	96/72.8
射出速度	Injection Speed	cm/sec	12.7/16.7
螺杆转速	Rotating Speed of Screw	r.p.m	0~167
温控段数	Temperature control	Section	4
电热功率	Heater Power	kw	9.2/2×6.8
电机功率	Motor Power	kw	16/16
总功率	Total Power	kw	54.8
油箱容量	Oil Tank Volume	L	500/400
机器重量	Machine Weight	ton	12
机械尺寸	Machine Dimension(L×W×H)	m	8.6×4.5×2.4

DY-4212C

全自动圆盘式两头四色塑胶鞋底注射成型机

Full Automatic Rotary Type Four Color Plastic Soles Injection Moulding Machine

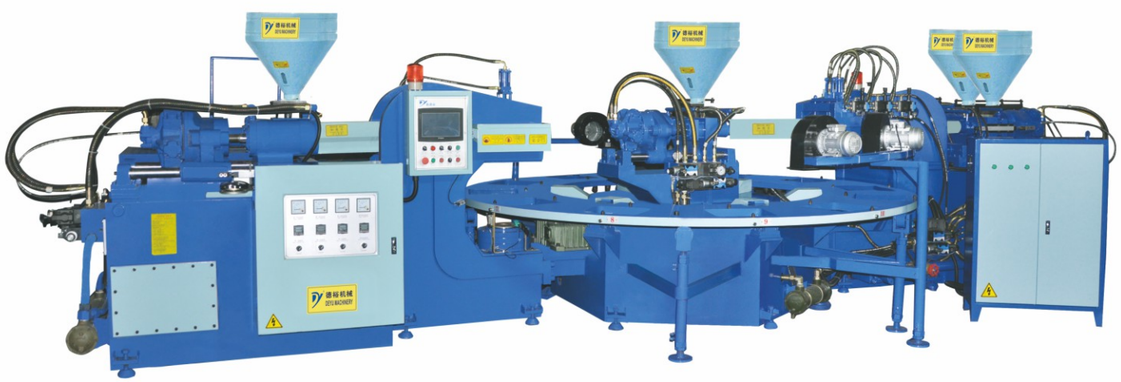

主要特点

- 专门适合于生产制造各类双色、三色、四色童鞋、运动鞋底、休闲鞋底、拖凉鞋及三色、四色混色鞋底；
- 原料方面适用于生产热可塑性塑胶原料PVC、TPR及TPU塑胶发泡、不发泡类；
- 全自动电脑程序控制操作、不须专业人员即可胜任，节省人力及时间；
- 本机结构灵巧，重量轻，机架的设计更适合工人操作；
- 油路电控搭配无间，减少等待时间，生产速度快，提高产量，减少耗能；
- 电机油泵外置、散热效果更佳，从而延长机器的使用寿命；
- 其生产量每小时220双；

FEATURES

- Applied in producing various two/three/four colors children shoes, sport shoes, casual shoes, sandals and multicolor soles.
- Suitable for thermoplastic raw material like PVC、TPR and TPU with or without foaming.
- Full automatic intelligent programmed control with low technique requirement for skilled worker. Saving labor force and time.
- Compact structure design, light machine weight, the design of machine frame is suitable for operators.
- The electronic control system is quick in respond, less waiting time, more production capacity and less energy consumption.
- The oil pump of the motor is outside placed, causing better cooling effect and longer duration of machine.
- The production output is about 220 pairs/h.

详细参数:

机器型号/Machine model	DY-4212C	以下数据仅供参考，若因实际设计需求有所变更，恕不另行通知。The following Data Are Only For Reference, If It Has Change Without Prior Notice.	
单元说明	Model	单位unit	数据Date
工位数	Station	station	12
夹模力	Clamping Force	ton	55/80
螺杆直径	Injecting Screw Diameter	mm	Φ65/3*Φ50
注射容量	Max.Injecting Capacity	cm3/shot	660/3*392
射出压力	Max.Injecting Pressure	kg/cm2	900/1100
生产量	Productivity Per Hour	pair/h	220
容模尺寸	Mould Dimension	mm	400*320*175
总功率	Total Power	kw	65
机械尺寸	Machine Dimension(L×W×H)	m	7.6*4*2.4
机器重量	Machine Weight	ton	13
用油量	Oil Capacity	L	600/600

DY-1124B

全自动圆盘式塑胶鞋类吹气注射成型机

Full Automatic Rotary Type Plastic Air Blowing Injection Moulding Machine

主要特点

- 可生产鞋底、拖鞋、凉鞋等各式全塑胶鞋底。
- 本机采用液晶显示器，PLC自动控制，能自动检测，操作方便。
- 原料可循环使用，产品的质感，质轻可媲美新料产品。
- 制品经过吹气发泡，使产品质轻、柔软、表面光泽，发泡率可达60%以上。
- 整体式油箱，占地面积少，触控式人机界面，人体工学设计，更具人性化。

FEATURES

- The machine can manufacture various types of plastic & rubber soles for slippers and sandals.
- Use LCD screen, PLC auto-control, automatically detected, easily operated.
- The raw material can be recycled and the quality of the products is nearly equal to new material.
- After blowing and foaming, the product is light, soft and smooth-faced with over 60% foamed rate.
- Intergrated oil tank takes less space. The man-machine interface is easy to operate.

详细参数:

机器型号/Machine model **DY-1124B**

以下数据仅供参考，若因实际设计需求有所变更，恕不另行通知。
The following Data Are Only For Reference, If It Has Change Without Prior Notice.

单元说明	Model	单位unit	数据date
工位数	Work Station	station	24
螺杆直径	Injecting Screw Diameter	mm	Φ65
注射容量	Max.Injecting Capacity	cm^3/shot	660
夹模力	Clamping Force	ton	55
射出压力	Max.Injecting Pressure	kg/cm^2	890
生产量	Productivity Per Hour	pair/h	130
容模尺寸	Mould Dimension	mm	480×320×300
总功率	Total Power	kw	31.5
机械尺寸	Machine Dimension(L×W×H)	m	4.29×4.7×2.175
机器重量	Machine Weight	ton	5.5
用油量	Oil Capacity	L	600

DY-2224B

全自动圆盘式两头双色塑胶鞋类吹气注射成型机

Full Automatic Rotary Type Two Color Plastic Rubber Air Blowing Injection Moulding Machine

主要特点

- 专业生产各类单、双色吹气棉鞋、休闲鞋、混色帮带、吹气迷彩鞋等。
- 适用于生产热可塑性塑胶原料PVC、TPR塑胶发泡、不发泡吹气类。
- 全自动电脑程序控制操作、料量精准，节省人力及时间。
- 本机结构灵巧，机架的设计更适合工人操作。
- 油路电控搭配无间，减少等待时间，生产速度快，提高产量，减少耗能。
- 高性能伺服节能系统，采用进口伺服电机油泵，稳定、耐用，节能效果好。

FEATURES

- Applied in producing various one/two colors mixing cotton shoes, casual shoes, strap, sandals etc.
- Suitable for thermoplastic raw material like PVC、TPR plastic foam,nonfoam blowing class.
- Full automatic intelligent programmed control with low technique requirement for skilled worker. Saving labor and time.
- Compact structure design, light machine weight, the design of machine frame is suitable for operators.
- The electronic control system is quick in respond, less waiting time,more production capacity and less energy consumption.
- Excellent servo energy saving system, imported servo motor pump has good performan ce in stability, durability and energy-saving effect.

详细参数:

机器型号/Machine model	DY-2224B	以下数据仅供参考，若因实际设计需求有所变更，恕不另行通知。The following Data Are Only For Reference, If It Has Change Without Prior Notice.

单元说明	Model	单位unit	数据date
工位数	Work Station	station	20/24
螺杆直径	Injecting Screw Diameter	mm	Φ75Φ65
注射容量	Max.Injecting Capacity	cm^3/shot	880/660
夹模力	Clamping Force	ton	55
射出压力	Max Injecting Pressure	kg/cm^2	660/890
生产量	Productivity Per Hour	pair/h	150
容模尺寸	Mould Dimension	mm	500×320×300
总功率	Total Power	kw	60
机械尺寸	Machine Dimension(L×W×H)	m	8.5×6.8×2.2 / 9.5×7.3×2.2
机械重量	Machine Weight	ton	15
用油量	Oil Capacity	L	800×2

DY-3124C

全自动圆盘式单头三色混色塑胶鞋类吹气注射成型机

Full Automatic Rotary Type Three Color Plastic Air Blowing Injection Moulding Machine

主要特点

- 专业生产各类单、双色、三色混色吹气棉鞋、休闲鞋、混色帮带、吹气迷彩鞋等。
- 适用于生产热可塑性塑胶原料PVC、TPR塑胶发泡、不发泡吹气类。
- 全自动电脑程序控制操作、料量精准，节省人力及时间。
- 本机结构灵巧，机架的设计更适合工人操作。
- 油路电控搭配无间，减少等待时间，生产速度快，提高产量，减少耗能。
- 高性能伺服节能系统，采用进口伺服电机油泵，稳定、耐用，节能效果好。

FEATURES

- Applied in producing various one/two/three colors mixing cotton shoes, casual shoes, strap, sandals etc.
- Suitable for thermoplastic raw material like PVC、TPR plastic foam,nonfoam blowing class.
- Full automatic intelligent programmed control with low technique requirement for skilled worker. Saving labor and time.
- Compact structure design, light machine weight, the design of machine frame is suitable for operators.
- The electronic control system is quick in respond, less waiting time,more production capacity and less energy consumption.
- Excellent servo energy saving system, imported servo motor pump has good performan ce in stability, durability and energy-saving effect.

详细参数:

机器型号/Machine model DY-3124C

以下数据仅供参考，若因实际设计需求有所变更，恕不另行通知。
The following Data Are Only For Reference, If It Has Change Without Prior Notice.

单元说明	Model	单位unit	数据date
工位数	Station	station	20/24
夹模力	Clamping Force	ton	80
容模尺寸	Mould Dimension	mm	400×320×360
螺杆直径	Diameter Of Screw	mm	Φ65/60/Φ60
螺杆直径比	Screw L/D Ratio	L/D	21/20/20
最大射程	Max.Injection Capacity	mm	195/195/195
射出压力	Injection Pressure	MPa	96/72.8/72.8
射出速度	Injection Speed	cm/sec	12.7/16.7/16.7
螺杆转速	Rotating Speed Of Screw	r.p.m	0~167
温控段数	Temperature Control	Section	4
电热功率	Heater Power	kw	9.2×2/6.8
电机功率	Motor Power	kw	53
总功率	Total Power	kw	70
油箱容量	Oil Tank Volume	L	670
机械重量	Machine Weight	ton	8
机械尺寸	Machine Dimension(L×W×H)	m	6×4×2.4

DY-3212B

全自动圆盘式两头三色塑胶鞋底注射成型机

Full Automatic Rotary Type Three Color Plastic Soles Injection Moulding Machine

主要特点

- 专门适于生产制造各类双色、三色、运动鞋底、休闲鞋底，男、女鞋底及拖、凉鞋底等。
- 原料方面适用于生产热可塑性塑胶原料PVC、TPR塑胶发泡、不发泡类。
- 全自动电脑程序控制操作、不须专业人员即可胜任，节省人力及时间。
- 本机结构灵巧，重量轻，机架的设计更适合工人操作。
- 油路电控搭配无间，减少等待时间，生产速度快，提高产量，减少耗能。
- 电机油泵外置、散热效果更佳，从而延长机器的使用寿命。

FEATURES

- Applied in producing various two/three colors soles sport shoes, casual shoes, man/woman shoes, sandals etc.
- Suitable for thermoplastic raw material like PVC、TPR with or without foaming.
- Full automatic intelligent programmed control with low technique requirement for skilled worker. Saving labor and time.
- Compact structure design, light machine weight, the design of machine frame is suitable for operators.
- The electronic control system is quick in respond, less waiting time,more production capacity and less energy consumption.
- The oil pump of the motor is outside placed, causing better cooling effect and longer duration of machine.

详细参数:

机器型号/Machine model DY-3212B

以下数据仅供参考，若因实际设计需求有所变更，恕不另行通知。
The following Data Are Only For Reference, If It Has Change Without Prior Notice.

单元说明	Model	单位unit	数据date
工位数	Work Station	station	12/16/20
夹模力	Clamping Force	ton	80
容模尺寸	Mould Dimension	mm	400×320×175
螺杆直径	Diameter of Screw	mm	Φ75/2× Φ60
螺杆直径比	Screw L/D Ratio	L/D	21/20
最大射程	Max.Injection Capacity	mm	195/195
射出压力	Injection Pressure	MPa	96/72.8
射出速度	Injection Speed	cm/sec	12.7/16.7
螺杆转速	Rotating Speed of Screw	r.p.m	0~167
温控段数	Temperature control	Section	4
电热功率	Heater Power	kw	9.2/2×6.8
电机功率	Motor Power	kw	16/16
总功率	Total Power	kw	60
油箱容量	Oil Tank Volume	L	500/500
机器重量	Machine Weight	ton	14
机械尺寸	Machine Dimension(L×W×H)	m	7.5X3.5X2.4

DY-1106

全自动六工位水冷圆盘塑胶注射成型机

Fully Automatic Six Station Water-Cooled Disc Plastic Injection Moulding Machine

主要特点

- 专门生产各种热可塑性原料，如PVC、TPE、TPR、TPU等，生产杠铃片，哑铃及汽车坐垫产品；
- 整机采用全电液伺服系统控制，响应快，高效节能；
- 射出均采用电子尺控制料量，计量精度高；
- 整机采用全自动电脑控制，PLC加人机界面，操作简单，亲和性佳；
- 全新自动开模结构，安全可靠，有效降低劳动强度，效率高；
- 采用中央水冷装置系统，冷却时间快；
- 采用全节能伺服系统，节约电量30%以上，油温低.

FEATURES

- Specializes in the production of various thermoplastic materials, such as PVC, TPE, TPR, TPU, etc., and produces products like barbell plates, dumbbells, and car seat cushions
- The whole machine is controlled by a full electro-hydraulic servo system, with fast response, high efficiency and energy saving
- Electronic ruler is used to control the amount of material in the injection, and the measurement accuracy is high
- The whole machine adopts fully automatic computer control, PLC and man-machine interface, simple operation and good affinity
- Brand new automatic mold opening structure, safe and reliable, effectively
- Adopting a central water cooling system, the cooling time is fast
- Adopting a fully energy-saving servo system, saving more than 30% of electricity and low oil temperature

详细参数:

机器型号/Machine model DY-1106-S

以下数据仅供参考，若因实际设计需求有所变更，恕不另行通知。
The following Data Are Only For Reference, If It Has Change Without Prior Notice.

单元说明	单位unit	数据Date
容模数	statlon	6
螺杆直径	mm	Φ105
注射容量	cm^3/shot	9000
夹模力	ton	400
射出行程	mm	700
最小模厚	mm	200
顶针行程	mm	350
最大容模尺寸	mm	650x600x470
平均功率	Kw	35
机械尺寸	m	7.2*4*3.2
机械重量	ton	18
用油量	L	500

DY-1102

全自动两工位滑板塑胶注射成型机

Fully Automatic Two Slide Plastic Rubber Injection Moulding Machine

主要特点

- 专门生产各种热可塑性原料，如PVC、TPE、TPR、TPU等，生产杠铃片，哑铃及汽车坐垫产品；
- 整机采用全电液伺服系统控制，响应快，高效节能；
- 射出均采用电子尺控制料量，计量精度高；
- 整机采用全自动电脑控制，PLC加人机界面，操作简单，亲和性佳；
- 全新自动开模结构，安全可靠，有效降低劳动强度，效率高；

FEATURES

- Specializes in the production of various thermoplastic materials, such as PVC, TPE, TPR, TPU, etc., and produces products like barbell plates, dumbbells, and car seat cushions
- The whole machine is controlled by a full electro-hydraulic servo system, with fast response, high efficiency and energy saving
- Electronic ruler is used to control the amount of material in the injection, and the measurement accuracy is high
- The whole machine adopts fully automatic computer control, PLC and man-machine interface, simple operation and good affinity
- Brand new automatic mold opening structure, safe and reliable, effectively

详细参数:

机器型号/Machine model DY-1102-S

以下数据仅供参考，若因实际设计需求有所变更，恕不另行通知。
The following Data Are Only For Reference, If It Has Change Without Prior Notice.

单元说明	单位unit	数据Date
容模数	statlon	2
螺杆直径	mm	Φ105
注射容量	cm^3/shot	9000
夹模力	ton	400
射出行程	mm	700
最小模厚	mm	200
左右开模缸行程	mm	850
顶针行程	mm	350
最大容模尺寸	mm	700x600x470
平均功率	Kw	35
机械尺寸	m	5.0*5.7*3.2
机械重量	ton	14.6
用油量	L	500

配套设备 / Auxiliary Equipment

原料搅拌机
Plastic Colour Mixer

原料干燥机
Hopper Dryer

油.粉.搅拌机
Oil Mixer

粉碎机
Crusher

螺杆空压机
Screw Compressor

冷冻机
Cooling Filter

水泵（冷却）
Water Pump

空气压缩机
Air Compressor

UV 紫外线照射机
Uv Ultraviolet Irradi–
Ation Machine

水塔（冷却）
WATER COOLING TOWER

单层恒温机器
Constant–Temperuture
Machine（one Layer）



双层恒温机器
Constant–Temperuture
Machine（two Layer）

注射成型机辅机
Mid Sole Cleaner