



- Series 850 and 851 interconnects are available in single and double row form.
- 850 & 852 series headers use MM #4006-1 and #4006-2 pins. See page 175 details.
- 851 & 853 series sockets use MM #4890-1 and #4890-2 receptacles, that accept pin diameters from 0,38 - 0,53 See page 131 for details.
- Insulators are high temp. thermoplastic.

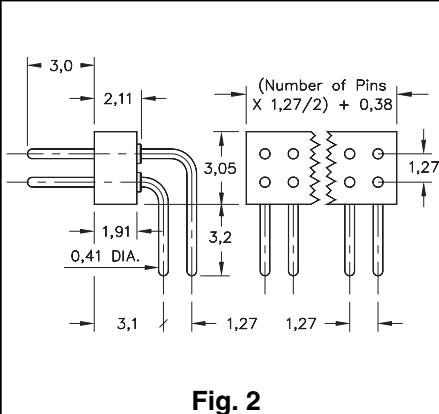

Ordering Information	
Fig. 1	Single Row Right Angle Pin Header
	850-XX-0__-20-001000
	Specify # of pins → 01-50
Fig. 2	Double Row Right Angle Pin Header
	852-XX-__-20-001000
	Specify # of pins → 002-100

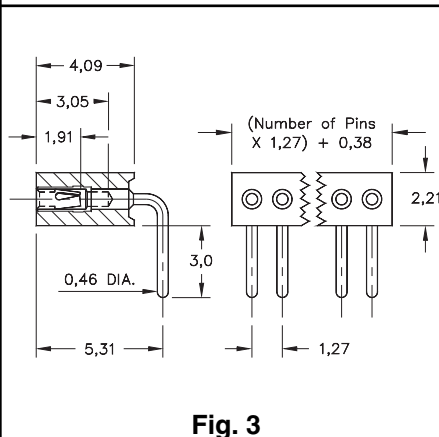

For Electrical, Mechanical & Environmental Data, See pg. 4		XX=Plating Code See Below		For RoHS compliance select ◇ plating code.	
SPECIFY PLATING CODE XX=	10◇	90	40◇		
Pin Plating	0,25µm Au	5,08µm Sn/Pb	5,08µm Sn		

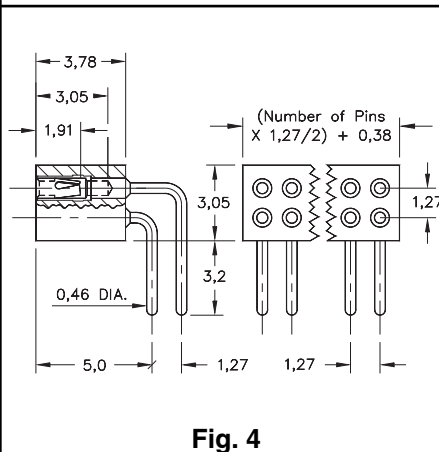


Fig. 3	Single Row Right Angle Socket
	851-XX-0__-20-001000
	Specify # of pins → 01-50
Fig. 4	Double Row Right Angle Socket
	853-XX-__-20-001000
	Specify # of pins → 002-100

For Electrical, Mechanical & Environmental Data, See pg. 4		XX=Plating Code See Below		For RoHS compliance select ◇ plating code.	
SPECIFY PLATING CODE XX=		93	99	43◇	
Sleeve (Pin)	5,08µm Sn/Pb	5,08µm Sn/Pb		5,08µm Sn	
Contact (Clip)	0,76µm Au	5,08µm Sn/Pb		0,76µm Au	