

## Machine à Laver — Contrôle Séquentiel Ladder

Prepared By DAOUDI Marouane

Memory Capacity

[Memory Capacity]

2000

[Program Capacity]

2000 Steps

[Comments Capacity]

0 Block 0 Points

[File Register Capacity]

0 Block 0 Points

PLC System

[Battery Less Mode]


-


[MODEM Initialized]

None

[RUN Terminal Input]

None

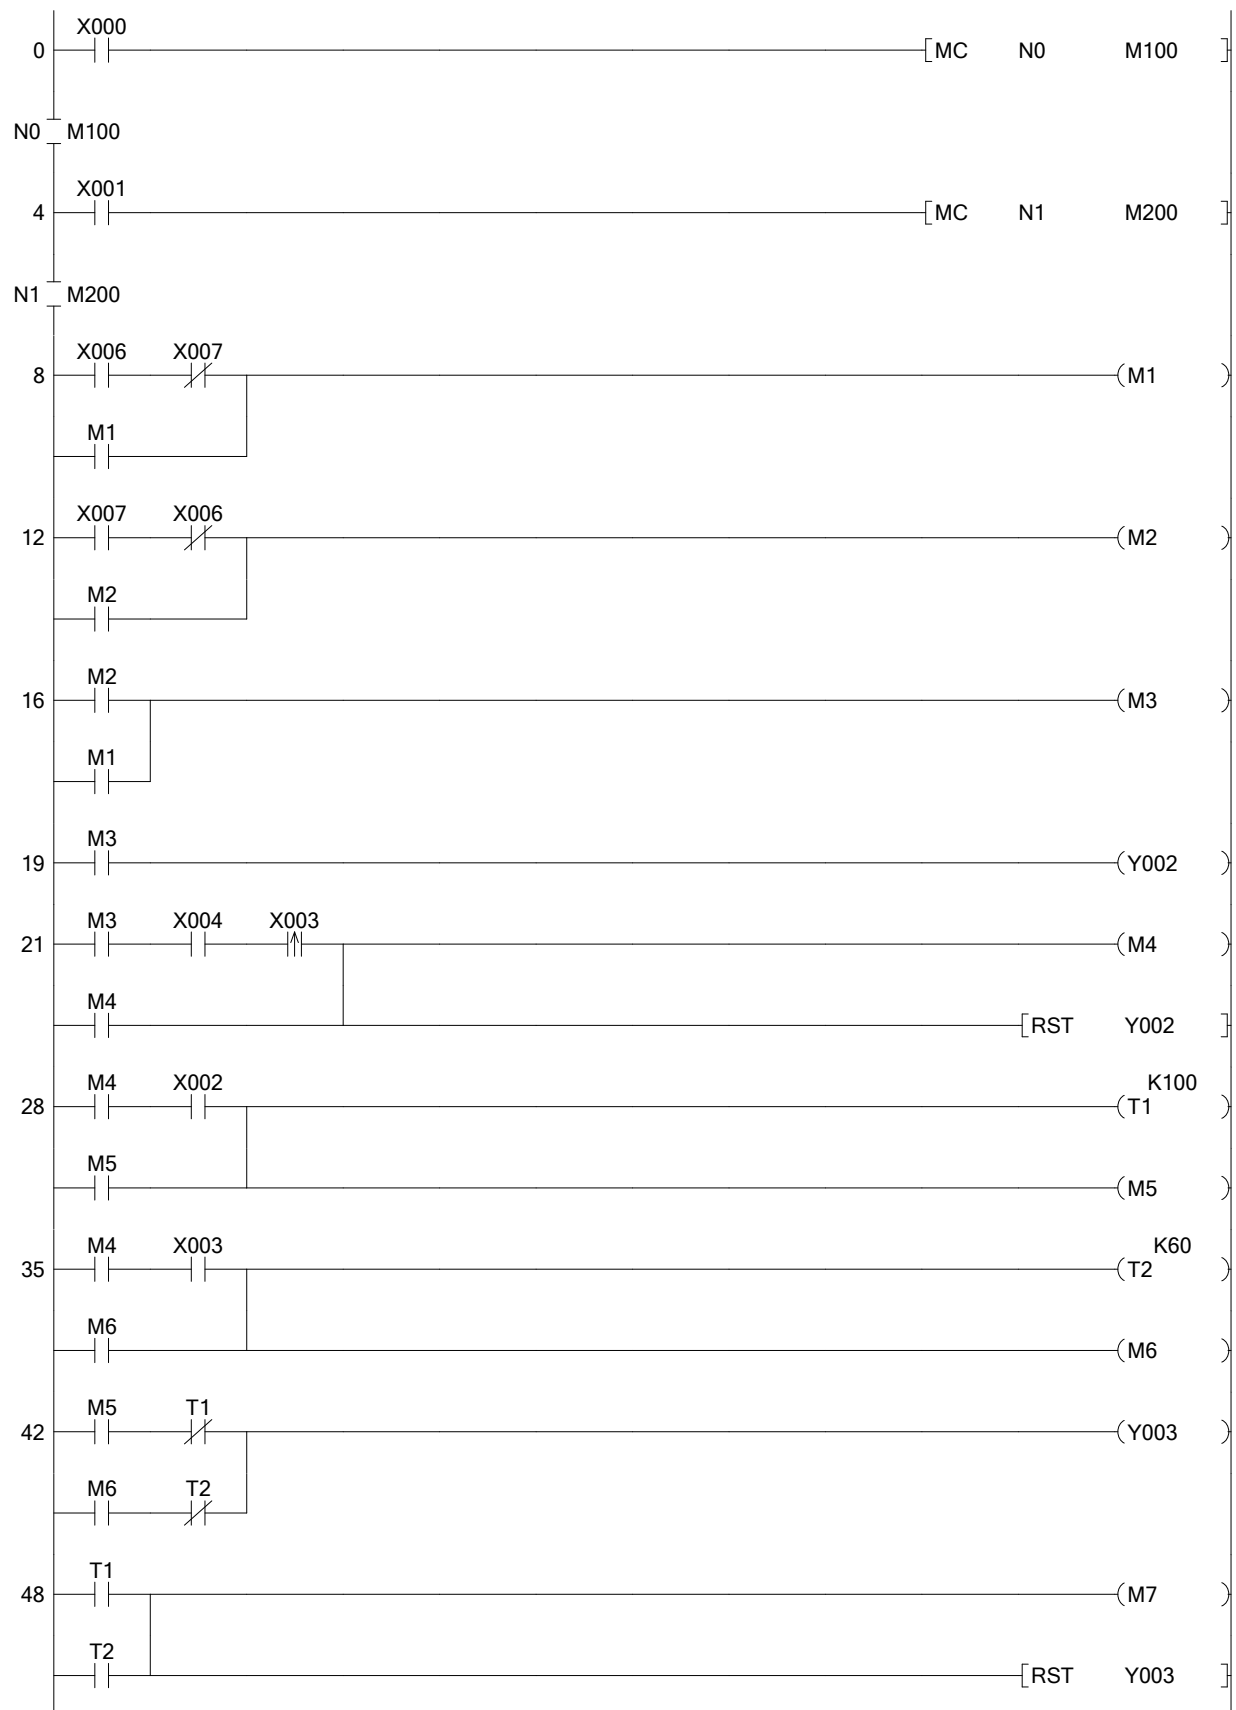

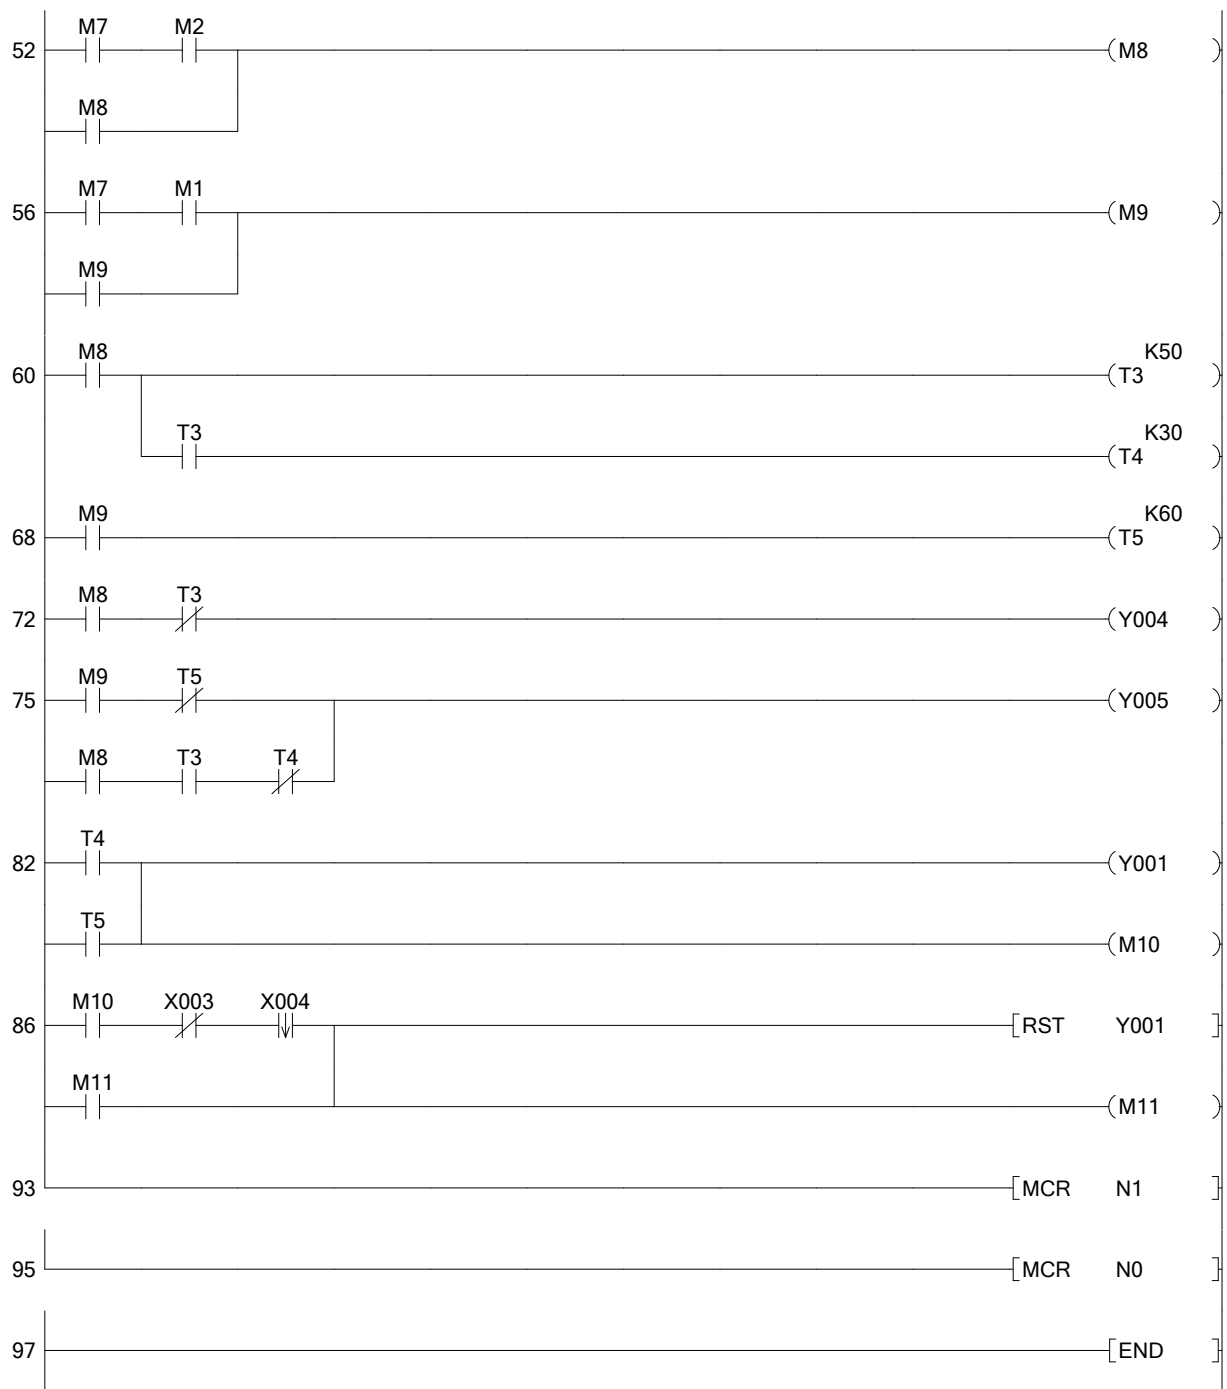

| Position | Device | Setting Value |
|----------|--------|---------------|
| ( 31) T1 |        | K100          |
| ( 38) T2 |        | K60           |
| ( 61) T3 |        | K50           |
| ( 65) T4 |        | K30           |
| ( 69) T5 |        | K60           |

Find In:LAB3TASK3

Find What:Used Device (Contact & Coil)

Print Range:Whole Range

\*:in use (times): the number of coil uses

| Device | Contact | Coil  | Parameter | Comment |
|--------|---------|-------|-----------|---------|
| M1     | *       | *( 1) |           |         |
| M2     | *       | *( 1) |           |         |
| M3     | *       | *( 1) |           |         |
| M4     | *       | *( 1) |           |         |
| M5     | *       | *( 1) |           |         |
| M6     | *       | *( 1) |           |         |
| M7     | *       | *( 1) |           |         |
| M8     | *       | *( 1) |           |         |
| M9     | *       | *( 1) |           |         |
| M10    | *       | *( 1) |           |         |
| M11    | *       | *( 1) |           |         |
| T1     | *       | *( 1) |           |         |
| T2     | *       | *( 1) |           |         |
| T3     | *       | *( 1) |           |         |
| T4     | *       | *( 1) |           |         |
| T5     | *       | *( 1) |           |         |