A ALE Finite Element Method for Vorticity-Streamfunction Formulation with Species Transport Equation

Student Researcher: Leandro Marques Advisors: Jose Pontes and Gustavo Anjos

State University of Rio de Janeiro June, 17th 2020



Outline



- 1. Introduction
- 2. Mathematical Model
- 3. Validation
- 4. Results
- 5. Conclusion

Introduction




Motivation:

► Ischaemic heart disease and stroke have remained the leading death causes globally in the last 15 years [1]

Aims:

- ► To develop a Finite Element code for stream-vorticity formulation with species transport equation using the Arbitrary Lagrangian-Eulerian (ALE) approach
- ► To create new drug-eluting design patent

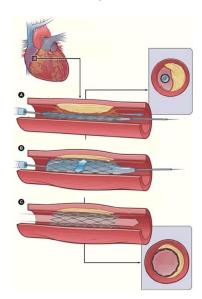




- 1. Introduction
- 2. Mathematical Model
- 3. Validation
- 4. Results
- 5. Conclusion

Arbitrary Lagrangian-Eulerian (ALE)



In ALE description, the referential frame moves with an arbitrary velocity that does not necessary represents the Lagrangian or Eulerian description.

The convection velocity is calculated by the relative velocity between the material and the mesh velocity respectively [2]



Governing Equations



Assumptions:

$$\frac{D\omega}{Dt} = \frac{1}{Re} \nabla^2 \omega$$

$$\nabla^2 \psi = -\omega$$

$$\frac{Dc}{Dt} = \frac{1}{ReSc} \nabla^2 c$$

where, $D(\cdot)/Dt$ is substantive derivative and the material velocity field is calculated by: $v_x = \partial \psi/\partial y$ and $v_y = -\partial \psi/\partial x$

Semi-Lagrangian Method




The implicit semi-Lagrangian time discretization provides [3]:

Advantages:

- ► Symmetric linear systems
- ► Unconditionnal stability


Disadvantages:

- ► Numerical Diffusion
- Searching procedure may lead to excessive computational cost if it is not well designed




$$\nabla^2 \psi = -\omega$$

$$\frac{c_i^{n+1} - c_d^n}{\Delta t} = \frac{1}{ReSc} \nabla^2 c^{n+1}$$



Galerkin FE Method





$$\begin{bmatrix} \frac{\mathsf{M}}{\Delta t} + \frac{\mathsf{K}}{Re} \end{bmatrix} \omega_i^{n+1} = \frac{\mathsf{M}}{\Delta t} \omega_d^n$$

$$\mathsf{K} \psi = \mathsf{M} \omega$$

$$\left[\frac{\mathsf{M}}{\Delta t} + \frac{\mathsf{K}}{\mathsf{ReSc}}\right] c_i^{n+1} = \frac{\mathsf{M}}{\Delta t} c_d^n$$

The material velocity field is calculated by: $\mathbf{M} v_{\mathbf{x}} = \mathbf{G}_{\mathbf{y}} \psi$ and $\mathbf{M} v_{\mathbf{y}} = -\mathbf{G}_{\mathbf{x}} \psi$


Adaptive Mesh Refinement



Laplace Smoothing description, comparative figures and ALE velocity formula

Solution Algorithm



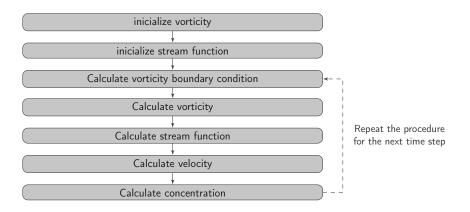

Streamfunction-Vorticity formulation with species transport equation solution algorithm



- 1. Introduction
- 2. Mathematical Model
- 3. Validation
- 4. Results
- 5. Conclusion

Validation - Poiseuille Flow




Boundaries Conditions:


Inflow condition: $u=1,\ v=0$ e $\psi=y$


Outflow condition: $\psi = y$

Top plate: u= 0, v= 0, $\psi=$ 1

Bottom plate: u=0, v=0, $\psi=0$







(a) comparison of Poiseuille Flow velocity profile and(b) log scale graph of convergence order.


Validation - Lid Driven Cavity Flow





Boundaries Conditions:

Bottom and side plates: $\it u=0$, $\it v=0$ e $\it \psi=0$

Top plate: u=1, v=0 e $\psi=0$







Centerline velocity profile in a lid-driven cavity for Re = 100: (a) u-velocity and (b) v-velocity.



- 1. Introduction
- 2. Mathematical Model
- 3. Validation
- 4. Results
- 5. Conclusion

Results



Coming Soon



- 1. Introduction
- 2. Mathematical Model
- 3. Validation
- 4. Results
- 5. Conclusion

Conclusion



- 1. Was observed that the species transport in blood flow is directly influenced by drug used in stent production
- 2. The streamfunction-vorticity formulation showed an useful approach for to calculate the velocity and concentration fields since the variables are scalars allowing a smooth implementation
- Due to generalized construction of the code, the simulator is able to describe drug-eluting stent problem in coronary artery as well as flows of Newtonian fluids with scalar transport (concentration or temperature)



Thank you!

marquesleandro67@gmail.com jose.pontes@uerj.br gustavo.rabello@mecanica.coppe.ufrj.br

The authors thank the FAPERJ (Research Support Foundation of the State of Rio de Janeiro) for its financial support

