
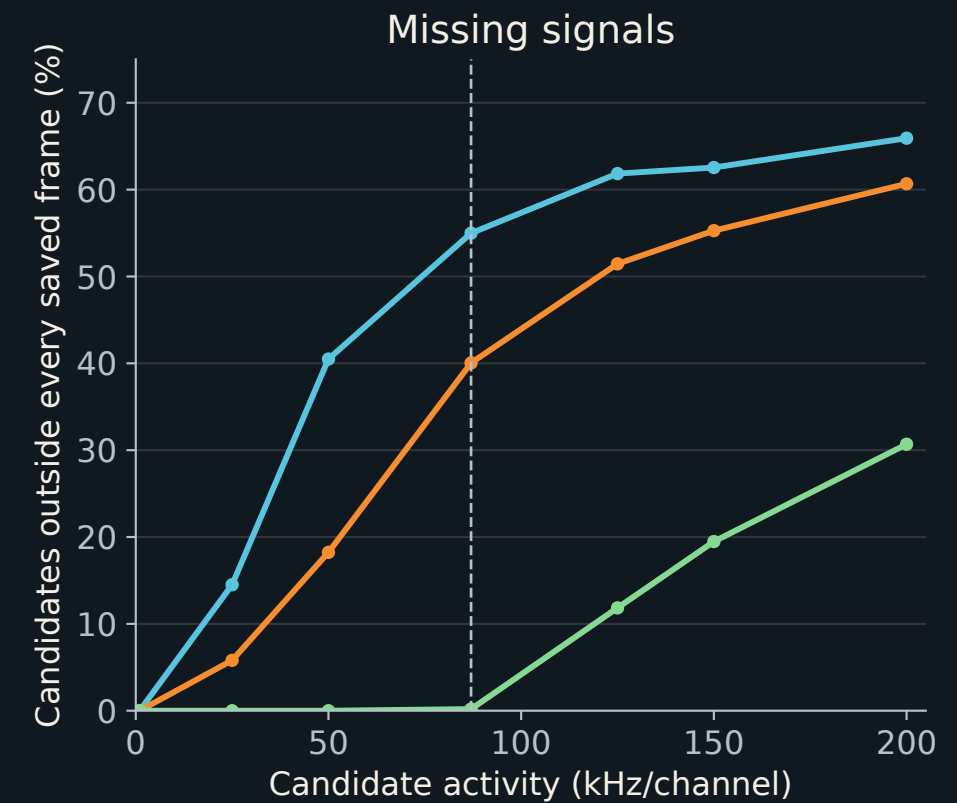


32 channels: matched candidate timestamps — pilot comparison

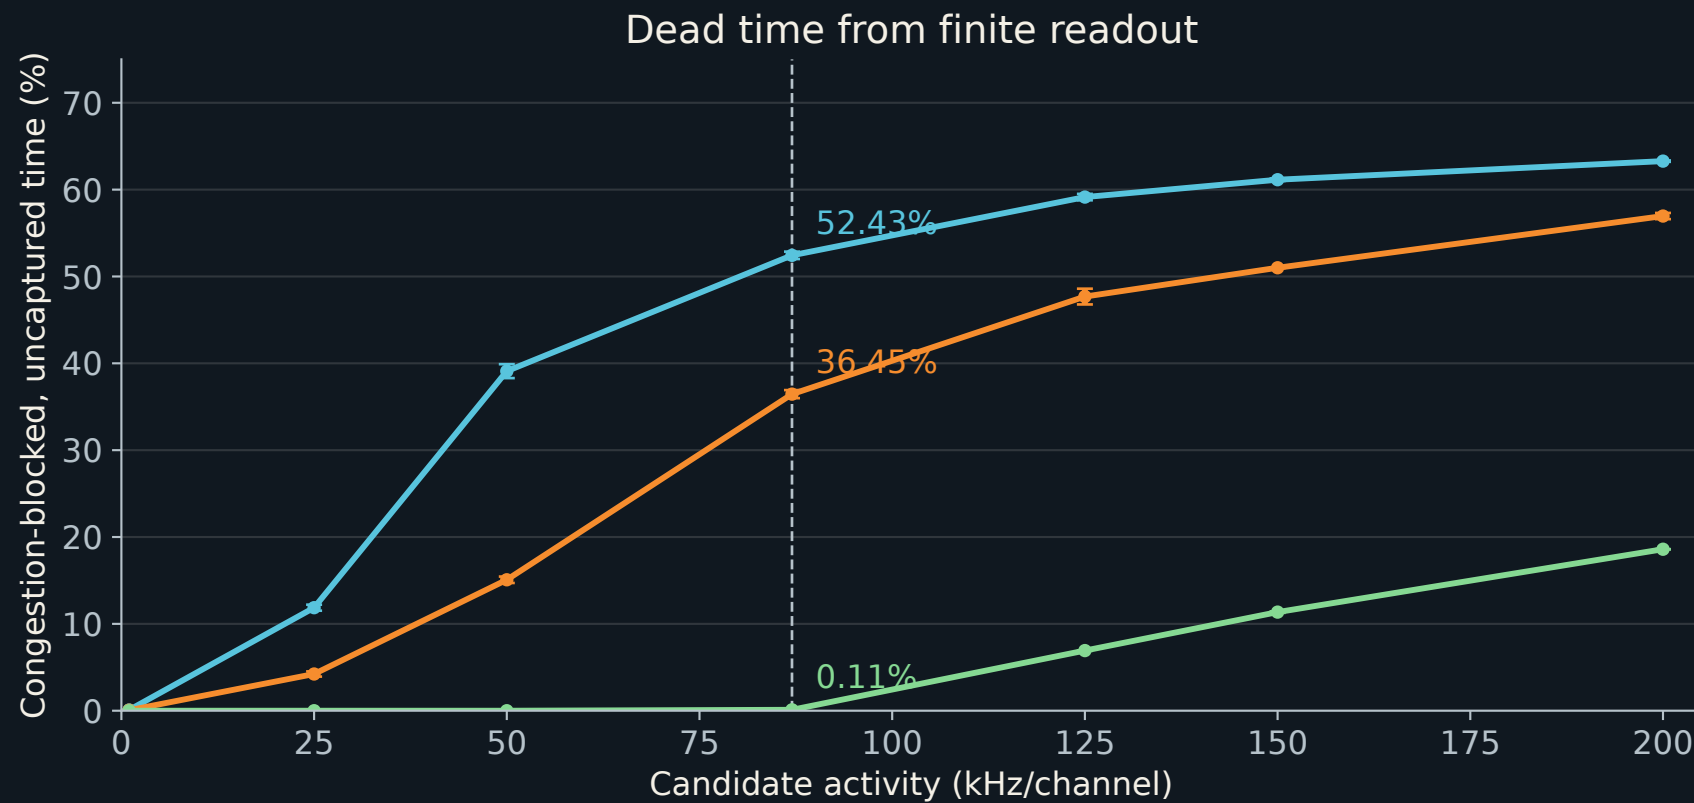

1024 samples / 5 descriptors / 1 link 512 samples / 5 descriptors / 1 link 256 samples / 5 descriptors / 2 links

87 kHz/channel: reference at 0.7 PE

256: grouped RTL + portable XPM; 1024/512: C++ models. Finite readout into Hermes; full UDP/MAC stalls not modeled.
Two seeds; 0.32 ms warmup + 0.96 ms measured per seed. 256 continuation enabled; synthetic 32-tick pulses. Bars: SEM only.