# Does an event change from M6 to the corner?

Each square counts events. Both stages use exactly the same recorded connected channels within each event.

First pulse → second early pulse
197 paired events

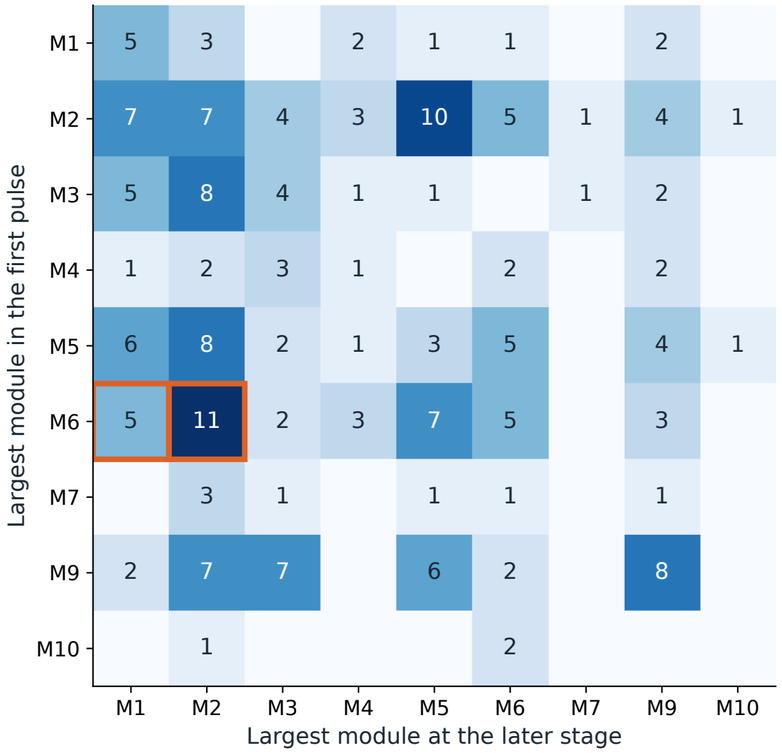


**First pulse strongest in M6: 36 events**
**Later strongest in M1–M2: 16 / 36 (44%)**

First pulse → precursor at −60 µs
533 paired events

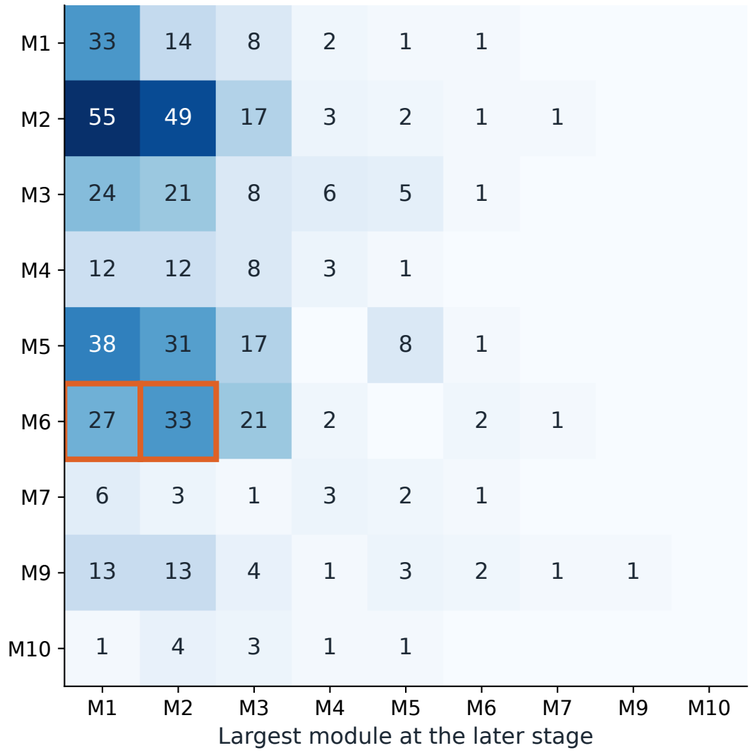


**First pulse strongest in M6: 86 events**
**Later strongest in M1–M2: 60 / 86 (70%)**

First pulse → main shake at +10 µs
393 paired events

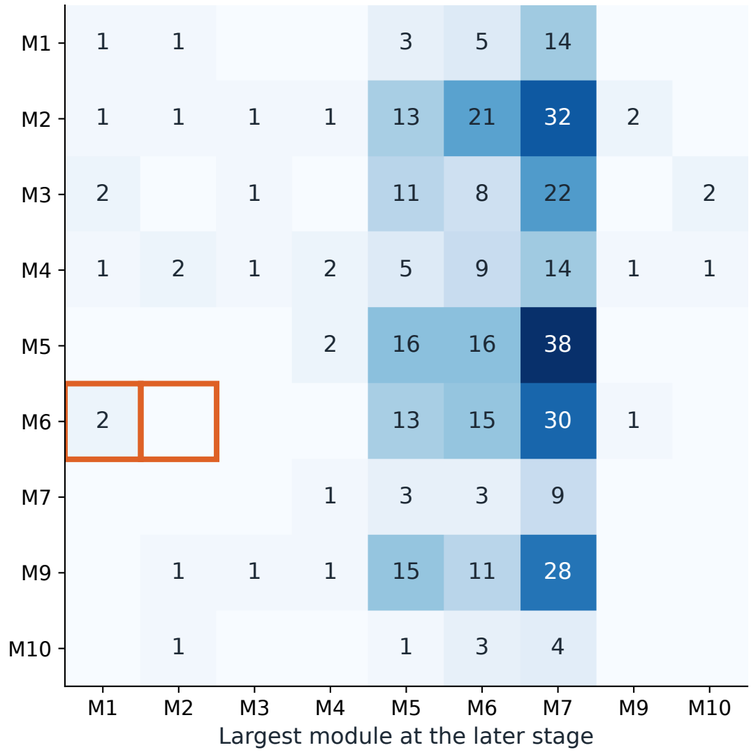


**First pulse strongest in M6: 61 events**
**Later strongest in M1–M2: 2 / 61 (3%)**

Orange boxes are the proposed M6 → M1/M2 change. The strongest section does change in some events; it does not follow one fixed route.

Each pair requires at least 12 common connected inputs across 4 modules and a signal ≥20 ADC counts at both stages.

This is a change in recorded response. Channel gains, signal polarity and electronics can affect it; no moving source or propagation speed is fitted.