Fink roof truss

Plane truss — analysis and CIRSOC 301 rod checks

Span	12.00 m
Height	3.00 m
Nodes / rods	7 / 11
Supports	pin at 0, rollerX at 3
Loads	3 nodal, total 45.0 kN
Family "Rafter"	CHS 88.9x4.0 (F24 (CIRSOC) / A36)
Family "Tie"	CHS 60.3x3.6 (F24 (CIRSOC) / A36)
Family "Web"	CHS 48.3x3.2 (F24 (CIRSOC) / A36)
Weight	Weighs 215 kg, carries 45.0 kN (21 × its own weight), passes (0.41).
Deflection	7.32 mm = L/1640, limit L/300: OK
Stability	Statically determinate (m + r − 2j = 11 + 3 − 2×7 = 0): statics alone gives every force.
Most used rod	rod 3 at 0.41 (inelastic buckling (E3-2))
Rods over capacity	0 of 11 checked
Buckling	$\lambda_1 = 3.39$
Shear and moment	none: every rod is pin-ended and loaded only at its nodes, so the axial force is the whole result


Results are an aid to a qualified professional who reviews them. Rods checked to CIRSOC 301 assuming pin-ended first-order analysis; joints and connections are not checked here.

Contents

2. Geometry
3. Axial forces
4. Deflection and stress
5. Reactions
6. Utilisation
7. Buckling
8. Rods
9. Explain rod 3 and 6

MODEL	SIZE	UNITS	CODE	DATE
Fink roof truss	7 nodes / 11 rods	m, kN, mm	CIRSOC 301	2026-10-12 12:05

Node numbers in purple, rod numbers in blue. Dimensions in m.

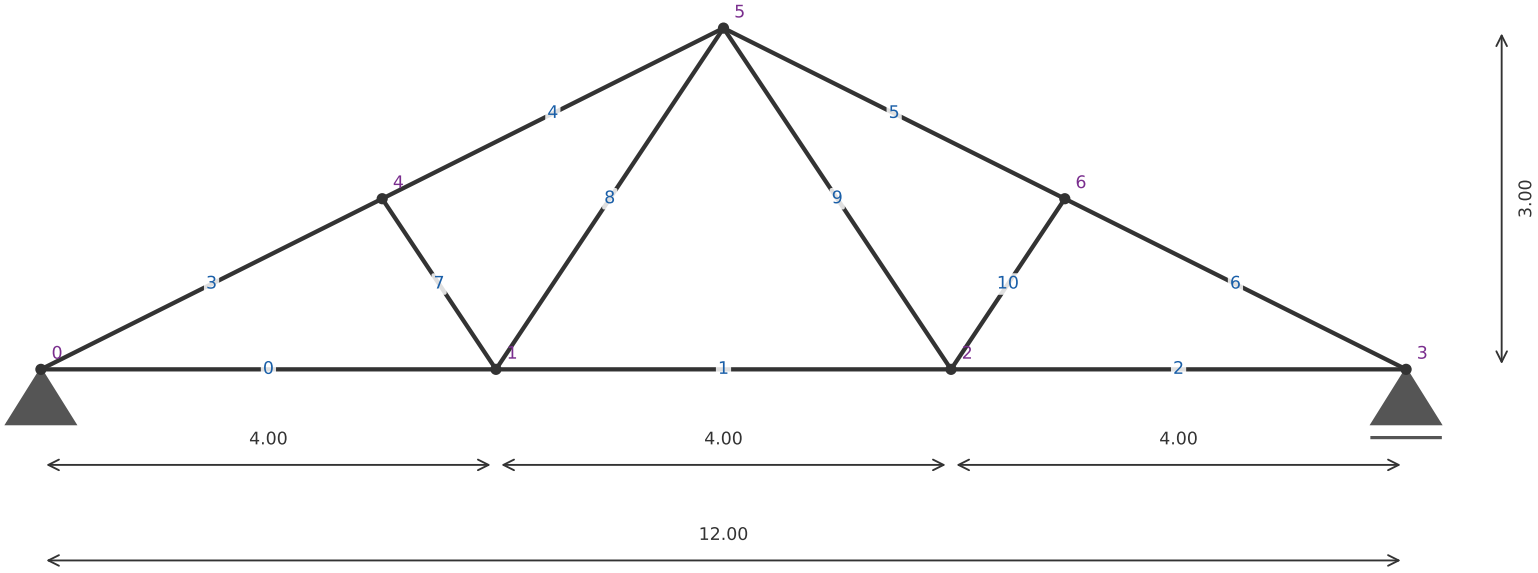

2 m · true to scale


0 2

Truss — Geometry

Sheet 2 / 9

MODEL	SIZE	UNITS	CODE	DATE
Fink roof truss	7 nodes / 11 rods	m, kN, mm	CIRSOC 301	2026-10-12 12:05

Axial force N (kN): red pulls (+), blue pushes (−), grey carries nothing; line width follows |N| (largest 50.3).

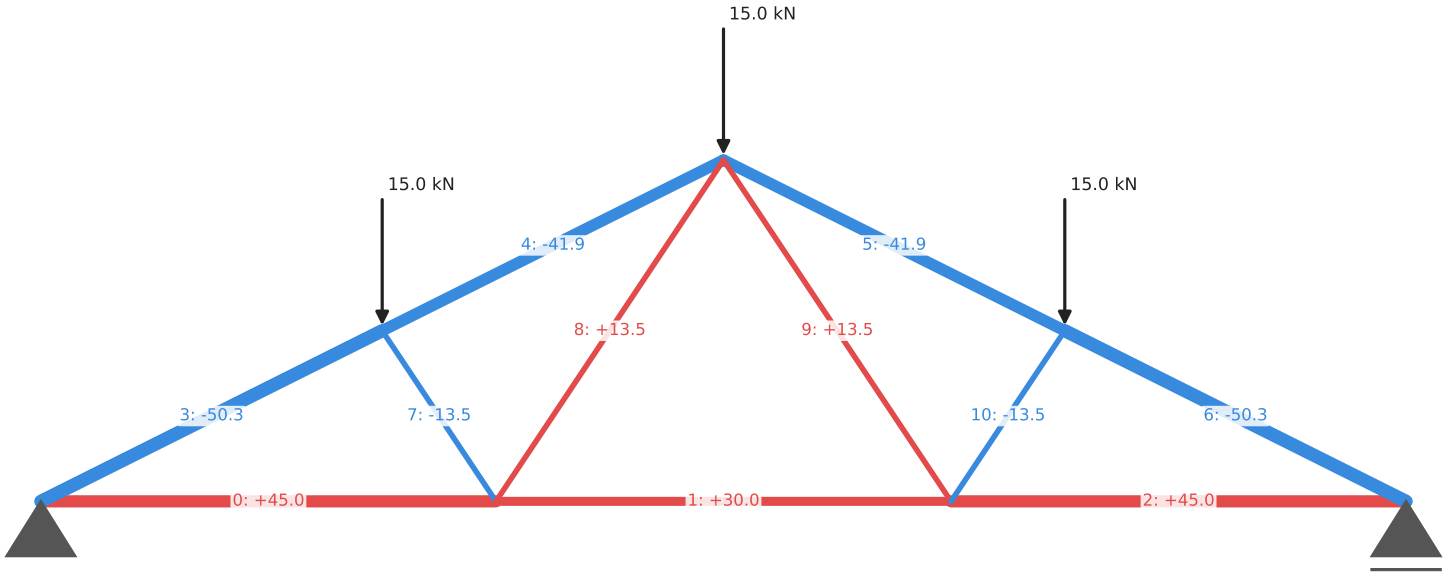

2 m · true to scale


0 2

Truss — Axial forces

Sheet 3 / 9


MODEL	SIZE	UNITS	CODE	DATE
Fink roof truss	7 nodes / 11 rods	m, kN, mm	CIRSOC 301	2026-10-12 12:05

Elastic line: the deflected shape (green) over the truss (grey), every rigid rod drawn as the curve it bends into. Geometry to scale; displacements magnified × 50. Every rod is pinned, so every member stays straight: there is no curvature, and no contraflexure. Largest vertical deflection 7.32 mm against the limit L/300 = 40.0 mm: OK.

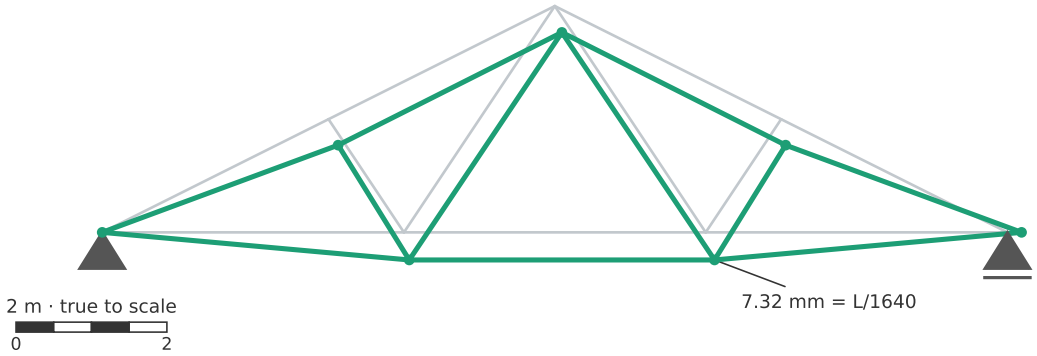


Fibre stress top and bottom face of each member

red = tension, blue = compression. Every rod is pinned, so both faces of a rod carry the same stress and each rod is one colour: the axial force.

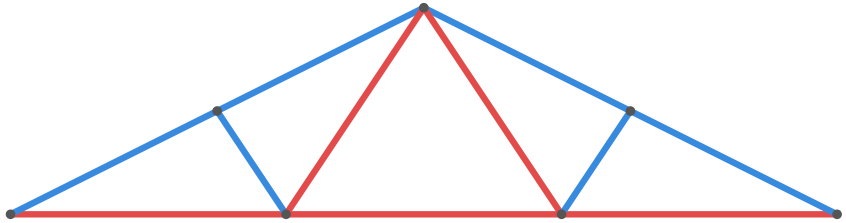


Deflection along the span vertical movement of every joint

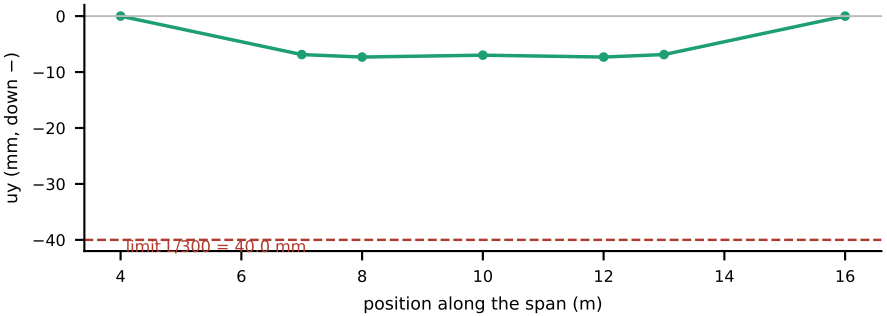

Largest 7.32 mm at joint 2 = L/1640. Within the limit.

Fibre stress values the two faces of each rod, MPa

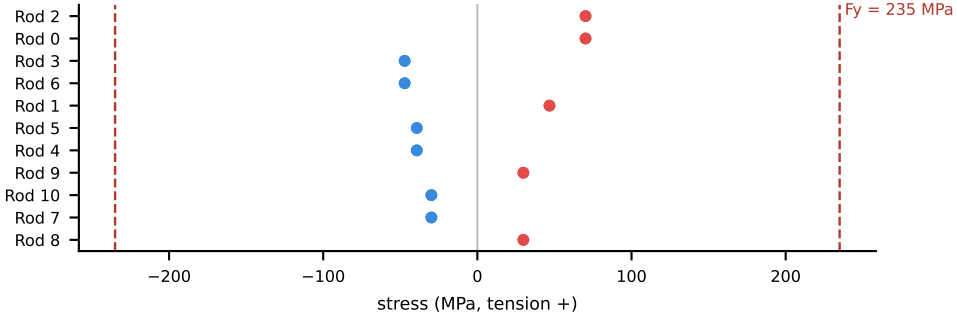


Every rod is pinned, so its two fibres carry the same N/A and coincide: no bending opens the pair.

Truss — Deflection and stress

MODEL	SIZE	UNITS	CODE	DATE
Fink roof truss	7 nodes / 11 rods	m, kN, mm	CIRSOC 301	2026-10-12 12:05

Support reactions (green arrows), as the supports push on the truss; Ry positive upwards. The sums balance the loads.


Node	Type	Rx (kN)	Ry (kN)
0	pin	0.00	22.50
3	rollerX	0.00	22.50
Σ		0.00	45.00

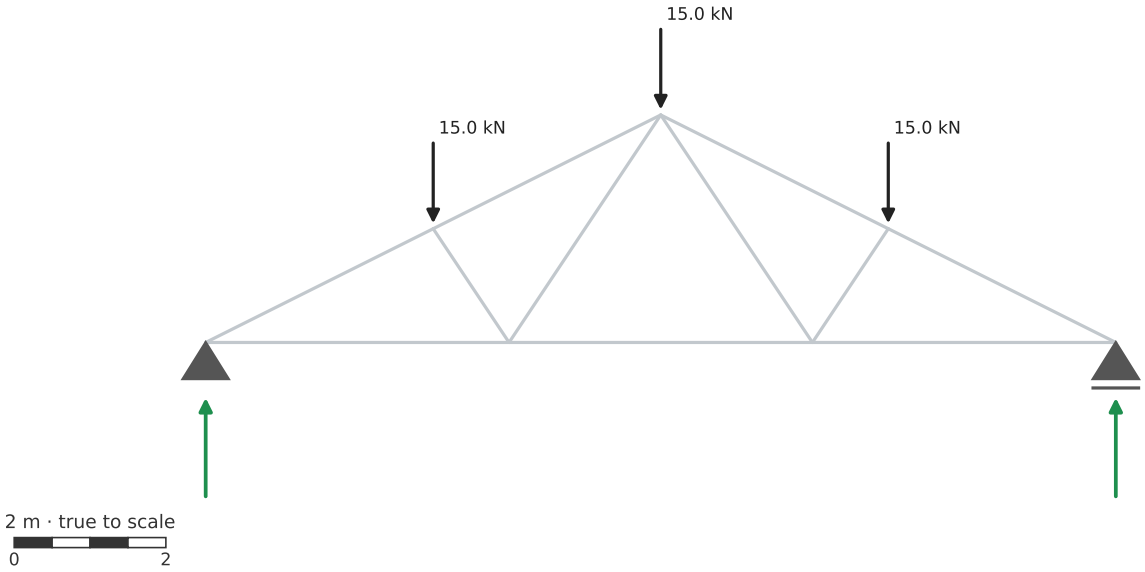


Truss — Reactions


MODEL	SIZE	UNITS	CODE	DATE
Fink roof truss	7 nodes / 11 rods	m, kN, mm	CIRSOC 301	2026-10-12 12:05

Utilisation: demand over CIRSOC 301 capacity. Most used rod 3 at 0.41 (inelastic buckling (E3-2)). Every checked rod is within capacity.

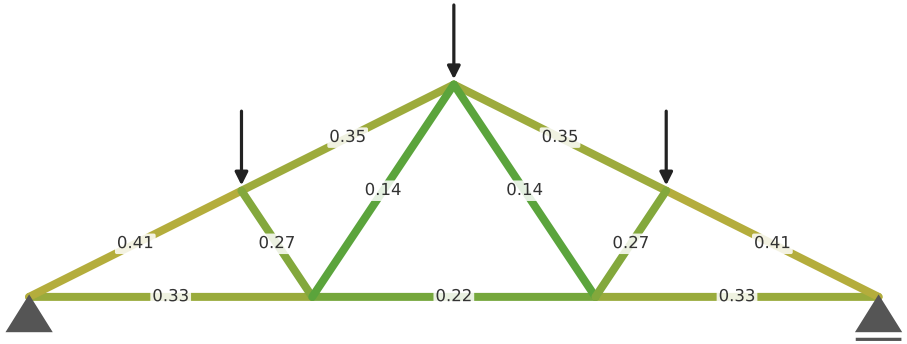

2 m · true to scale
0 2

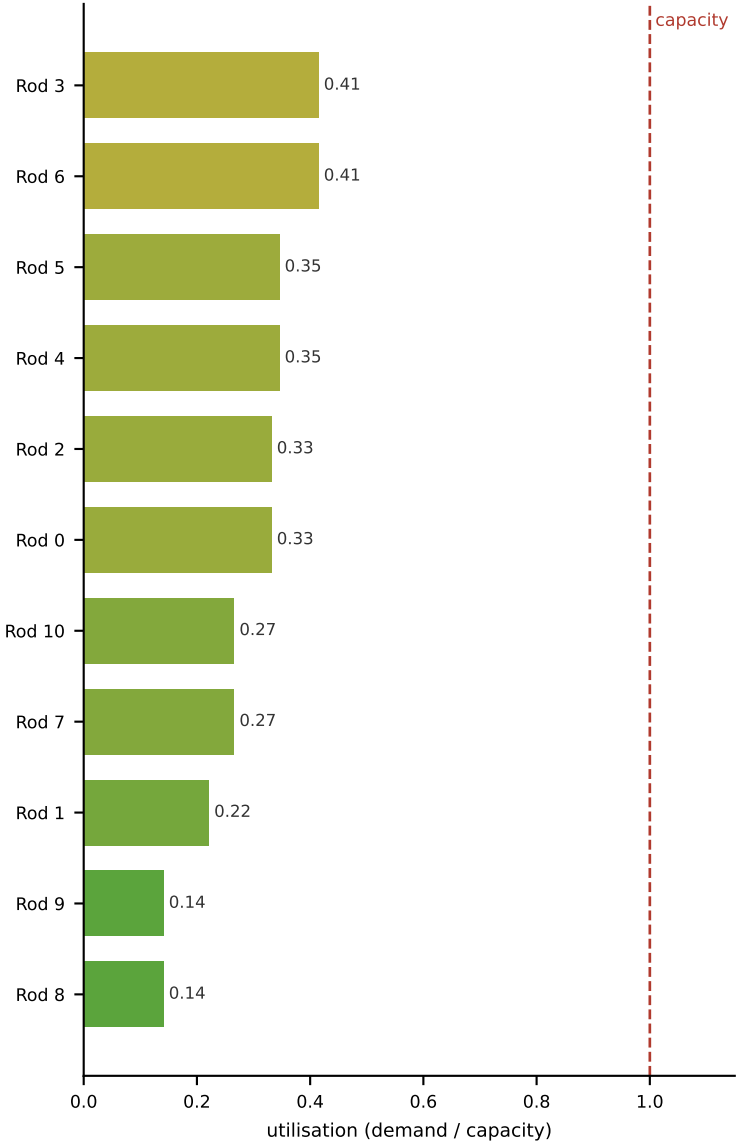



grey = no steel section, not checked


Truss — Utilisation

Sheet 6 / 9


MODEL	SIZE	UNITS	CODE	DATE
Fink roof truss	7 nodes / 11 rods	m, kN, mm	CIRSOC 301	2026-10-12 12:05

λ is the factor on the load as it stands. $\lambda_1 = 3.39$, so the load can grow 3.4× before it buckles. 2 modes share that λ: that many equal members buckle at the same load, so stiffening one of them buys nothing.


Mode 1: λ = 3.39
rod 6 bows

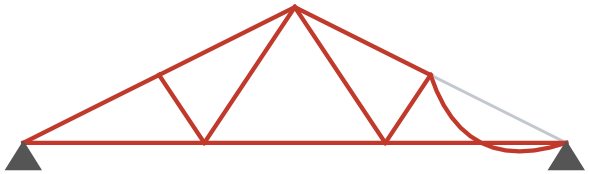


Mode 2: λ = 3.39
rod 3 bows

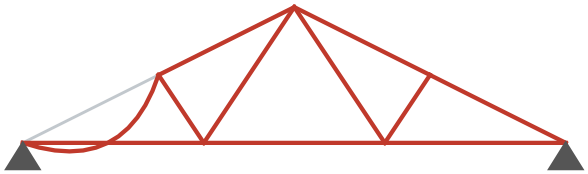

Mode 3: λ = 4.06
rod 4 bows

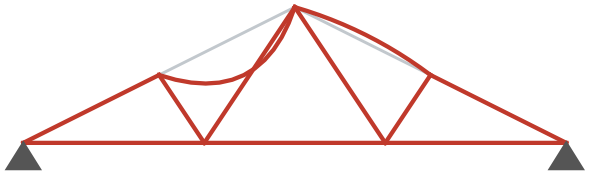

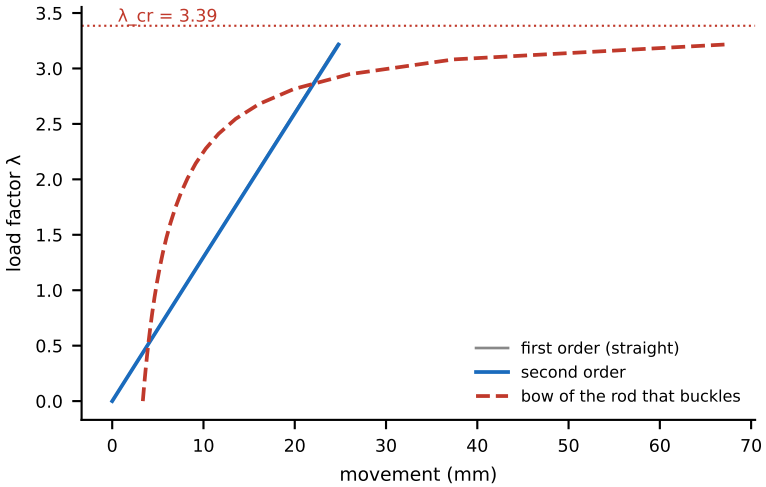


The second-order line bends away from the first-order one and runs off as λ nears λ_cr: that gap IS the amplification every second-order design rule is about. Started from an initial bow of L/1000 = 3.35 mm in the first mode's shape.

Elastic buckling of the IDEAL truss, so every λ is an UPPER bound: imperfections, residual stresses and yielding are not modelled, and each rod is cut in two so it can bow between its joints. Buckling OUT of the plane is the rod check's job (CIRSOC 301 E3, minor radius) and is in the Utilisation and Rods sheets, not here. A mode has a shape, not a size: the shapes are drawn exaggerated.

Truss — Buckling

MODEL	SIZE	UNITS	CODE	DATE
Fink roof truss	7 nodes / 11 rods	m, kN, mm	CIRSOC 301	2026-10-12 12:05

Rod	Nodes	Family	Section	L (m)	N (kN)	Governing check	Use	
0	0–1	Tie	CHS 60.3x3.6	4.00	+45.00	normal stress (H.3.4)	0.33	OK
1	1–2	Tie	CHS 60.3x3.6	4.00	+30.00	normal stress (H.3.4)	0.22	OK
2	2–3	Tie	CHS 60.3x3.6	4.00	+45.00	normal stress (H.3.4)	0.33	OK
3	0–4	Rafter	CHS 88.9x4.0	3.35	-50.31	inelastic buckling (E3-2)	0.41	OK
4	4–5	Rafter	CHS 88.9x4.0	3.35	-41.93	inelastic buckling (E3-2)	0.35	OK
5	5–6	Rafter	CHS 88.9x4.0	3.35	-41.93	inelastic buckling (E3-2)	0.35	OK
6	6–3	Rafter	CHS 88.9x4.0	3.35	-50.31	inelastic buckling (E3-2)	0.41	OK
7	4–1	Web	CHS 48.3x3.2	1.80	-13.52	inelastic buckling (E3-2)	0.27	OK
8	1–5	Web	CHS 48.3x3.2	3.61	+13.52	normal stress (H.3.4)	0.14	OK
9	5–2	Web	CHS 48.3x3.2	3.61	+13.52	normal stress (H.3.4)	0.14	OK
10	2–6	Web	CHS 48.3x3.2	1.80	-13.52	inelastic buckling (E3-2)	0.27	OK



Rod 3

utilisation 0.41

inelastic buckling (E3-2)

```
Rod 3
=====
Steel, CIRSOC 301-2018 -- A = 1,067 mm², Fy = 235 MPa, L = 3.354 m

 1. Slenderness  [E2]
      K·L / r
      = 1 × 3,354 mm / 30.0 mm
      = 111.6

 2. Euler stress  [E3-4]
      Fe = π² E / (KL/r)²
      = π² × 200,000 / 111.6²
      = 158.44 MPa

 3. Which branch  [E3]
      KL/r ≤ 4.71 √(E/Fy) ?
      = 111.6 vs 4.71 √(200,000/235) = 137.4
      = inelastic


 4. Critical stress  [E3-2]
      Fcr = 0.658^(Fy/Fe) · Fy
      = 0.658^(235/158.44) × 235
      = 126.32 MPa

 5. Design strength  [E3-1]
      Pd = φc · Fcr · A
      = 0.9 × 126.32 × 1,067
      = 121.29 kN

 6. Compression ratio  [E3]
      |N| / Pd
      = 50.31 / 121.29
      = 0.415

 7. Governs
      the largest ratio
      = inelastic buckling (E3-2)
      = 0.415

utilisation 0.415 -- OK
```



Rod 6

utilisation 0.41

inelastic buckling (E3-2)

```
Rod 6
=====
Steel, CIRSOC 301-2018 -- A = 1,067 mm², Fy = 235 MPa, L = 3.354 m

 1. Slenderness  [E2]
      K·L / r
      = 1 × 3,354 mm / 30.0 mm
      = 111.6

 2. Euler stress  [E3-4]
      Fe = π² E / (KL/r)²
      = π² × 200,000 / 111.6²
      = 158.44 MPa

 3. Which branch  [E3]
      KL/r ≤ 4.71 √(E/Fy) ?
      = 111.6 vs 4.71 √(200,000/235) = 137.4
      = inelastic

 4. Critical stress  [E3-2]
      Fcr = 0.658^(Fy/Fe) · Fy
      = 0.658^(235/158.44) × 235
      = 126.32 MPa

 5. Design strength  [E3-1]
      Pd = φc · Fcr · A
      = 0.9 × 126.32 × 1,067
      = 121.29 kN

 6. Compression ratio  [E3]
      |N| / Pd
      = 50.31 / 121.29
      = 0.415

 7. Governs
      the largest ratio
      = inelastic buckling (E3-2)
      = 0.415

utilisation 0.415 -- OK
```