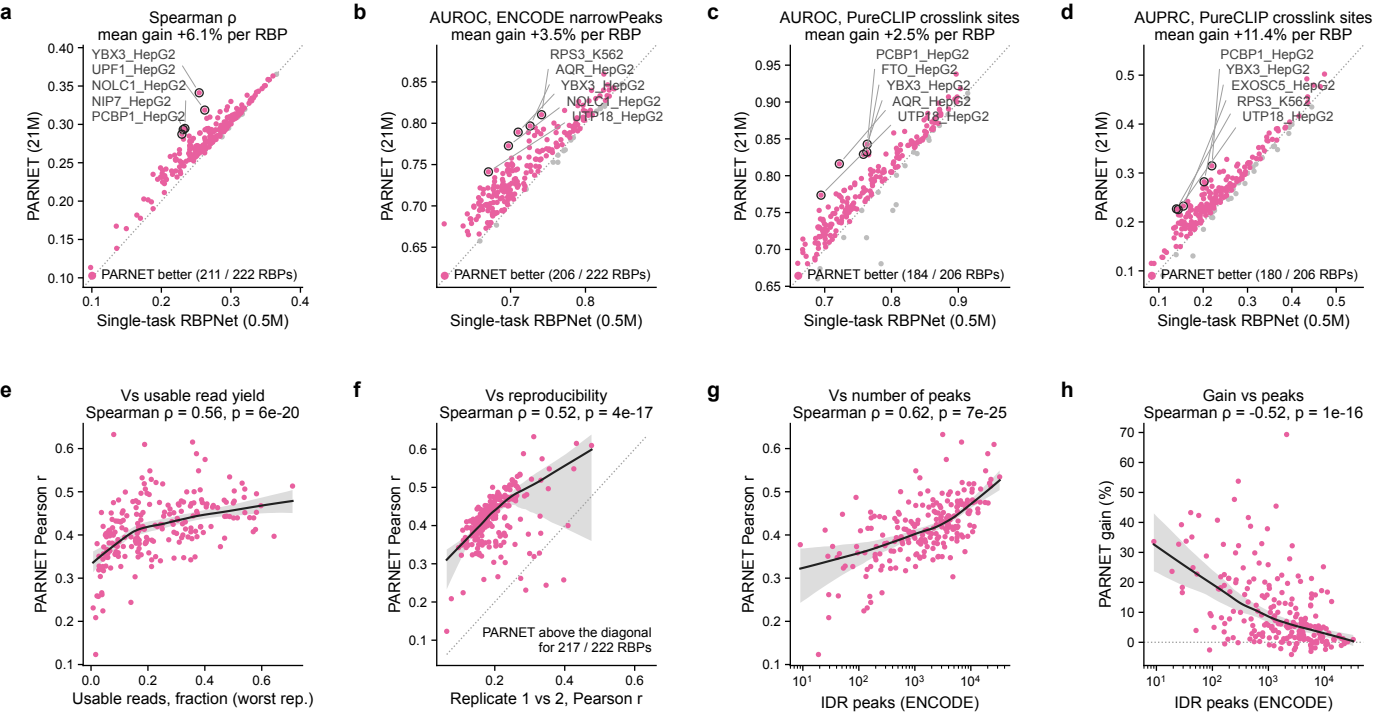

a
Spearman ρ
mean gain +6.1% per RBP
YBX3_HepG2
UPF1_HepG2
NOLC1_HepG2
NIP7_HepG2
PCBP1_HepG2
PARNET better (211 / 222 RBPs)
PARNET (21M)
Single-task RBPNet (0.5M)
b
AUROC, ENCODE narrowPeaks
mean gain +3.5% per RBP
RPS3_K562
AQR_HepG2
YBX3_HepG2
NOLC1_HepG2
UTP18_HepG2
PARNET better (206 / 222 RBPs)
PARNET (21M)
Single-task RBPNet (0.5M)
c
AUROC, PureCLIP crosslink sites
mean gain +2.5% per RBP
PCBP1_HepG2
FTO_HepG2
YBX3_HepG2
AQR_HepG2
UTP18_HepG2
PARNET better (184 / 206 RBPs)
PARNET (21M)
Single-task RBPNet (0.5M)
d
AUPRC, PureCLIP crosslink sites
mean gain +11.4% per RBP
PCBP1_HepG2
YBX3_HepG2
EXOSC5_HepG2
RPS3_K562
UTP18_HepG2
PARNET better (180 / 206 RBPs)
PARNET (21M)
Single-task RBPNet (0.5M)
e
Vs usable read yield
Spearman ρ = 0.56, p = 6e-20
PARNET Pearson r
Usable reads, fraction (worst rep.)
f
Vs reproducibility
Spearman ρ = 0.52, p = 4e-17
PARNET above the diagonal
for 217 / 222 RBPs
PARNET Pearson r
Replicate 1 vs 2, Pearson r
g
Vs number of peaks
Spearman ρ = 0.62, p = 7e-25
PARNET Pearson r
IDR peaks (ENCODE)
h
Gain vs peaks
Spearman ρ = -0.52, p = 1e-16
PARNET gain (%)
IDR peaks (ENCODE)