




Electrical Insulation Mats

www.marso-egy.com

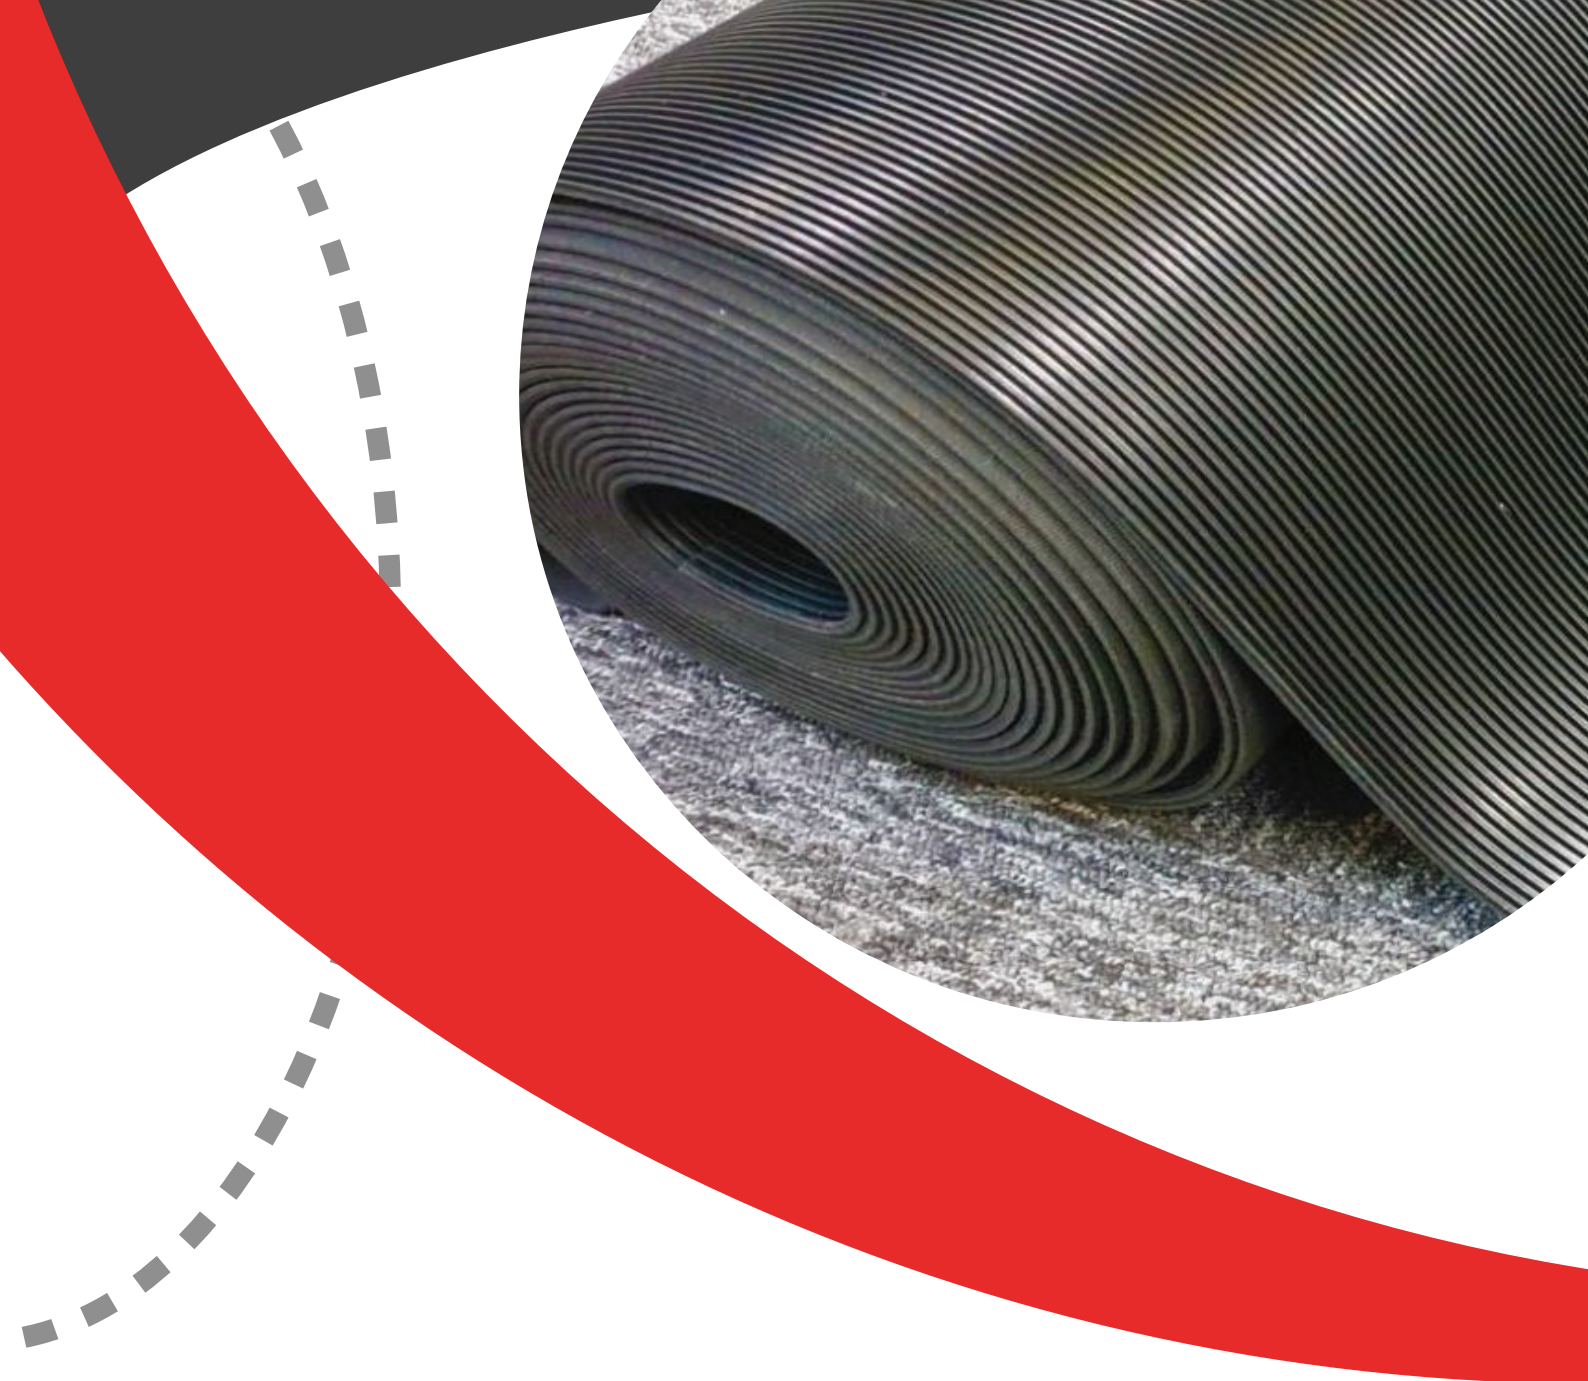

How Do Electrical Insulation Mats Work?

Electrical Insulation mats are made of rubber. Rubber, due to its properties of resistivity, is used in many applications throughout industry to insulate and protect; it is an obvious choice for electrical safety matting and is tested vigorously to ensure the level of protection is met. Rubber is a natural dielectric material and will therefore inhibit the flow of electric charge as a result of its molecular structure preventing the free flow of electrons. The dielectric and electrically resistant properties of rubber make it an ideal insulator. This when combined with the flexibility and cushioning nature of the material, makes it a perfect choice for electrical safety matting. Maintaining the insulating properties of the Rubber is intrinsically linked to the construction of the compound. Any additives (dyes, fillers, preservatives and curatives) can all affect the electrical resistance, hence the need for strict quality control standards to be applied throughout manufacture to maintain the insulation performance.



SAFE-Electrical Insulation Mats

SAFE Electrical Insulation Mats are high voltage rubber mats, they confirm to IEC 61111 and are manufactured using high quality elastomer rubber in order to provide complete protection against electric shock due to earth faults.

Mat Features

- Can withstand 10 KV to 71 KV
- Suitable for both AC & DC installation
- Electrical mat is hard wearing, non-slip and can be easily clean or washed with a mild detergent
- Anti-fatigue nature, comfort feet while standing for prolonged period
- Matting is packed in 10 meters rolls to avoid joints, however cut lengths are also supplied
- Conformity with IEC 2009-61111 requirements
- Every 600 mm is marked with class & working voltage
- Electrically tested for each meter

Photos

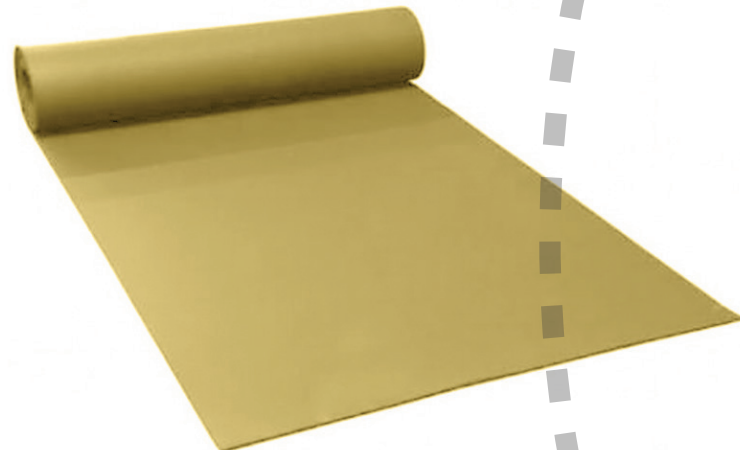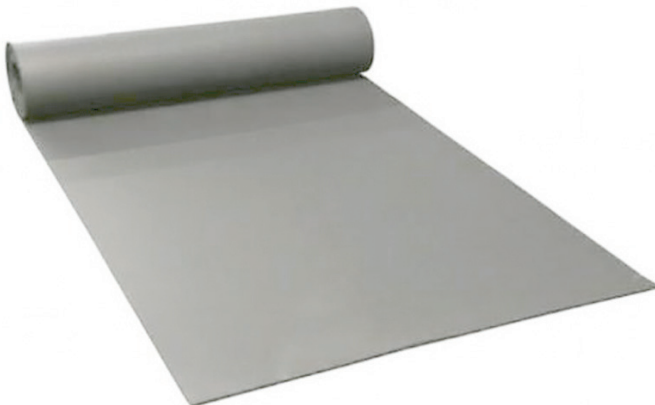

Classes



Class 0 Thickness: 2,3 mm Color: Black
withstand V : 12 Proof V: 8,9 Material: NR&SBR

Class 2 Thickness: 3 mm Color: Beige
withstand V : 42 Proof V: 38 Material: NR&SBR

Class 6 Thickness: 6 mm Color: Black
withstand V : 79 Proof V: 71 Material: EPDM

Class 2 Thickness: 4 mm Color: Black
withstand V : 37 Proof V: 33 Material: EPDM

Class 4 Thickness: 6 mm Color: Beige
withstand V : 55 Proof V: 50 Material: NR&SPR

Class 3 Thickness: 10 mm Color: Black
withstand V : 51 Proof V: 46 Material: NR&SPR

Class 4 Thickness: 10 mm Color: Beige
withstand V : 66 Proof V: 58 Material: NR&SPR

Class 5 Thickness: 10 mm Color: Grey
withstand V : 71 Proof V: 63 Material: NR&SPR

0 = 0 - 10 kv

1 = More than 20 KV, 2 = More than 30 KV, 3 = More than 40 KV, 4 = More than 50KV

5 = More than 60 KV , 6 = More than 70 KV

Product Info.



Features

- Good electrical insulator.
- Does not react to weather conditions.
- Anti-acid and oils.
- It has no negative effect on children if directly touched according to our customer feedbacks.
- Temperature: -15°C TO 100 °C

Way of installment:

Any rubber adhesive or polyurethane is used on a surface

Physical Specifications:

- Hardness (Shore A): 5±65
- Tensile (min.): 4 MPa.
- Elongation at break (min.): 275 %.



Thank You

www.marso-egy.com

