




Marso Rubber Rolls

www.marso-egy.com

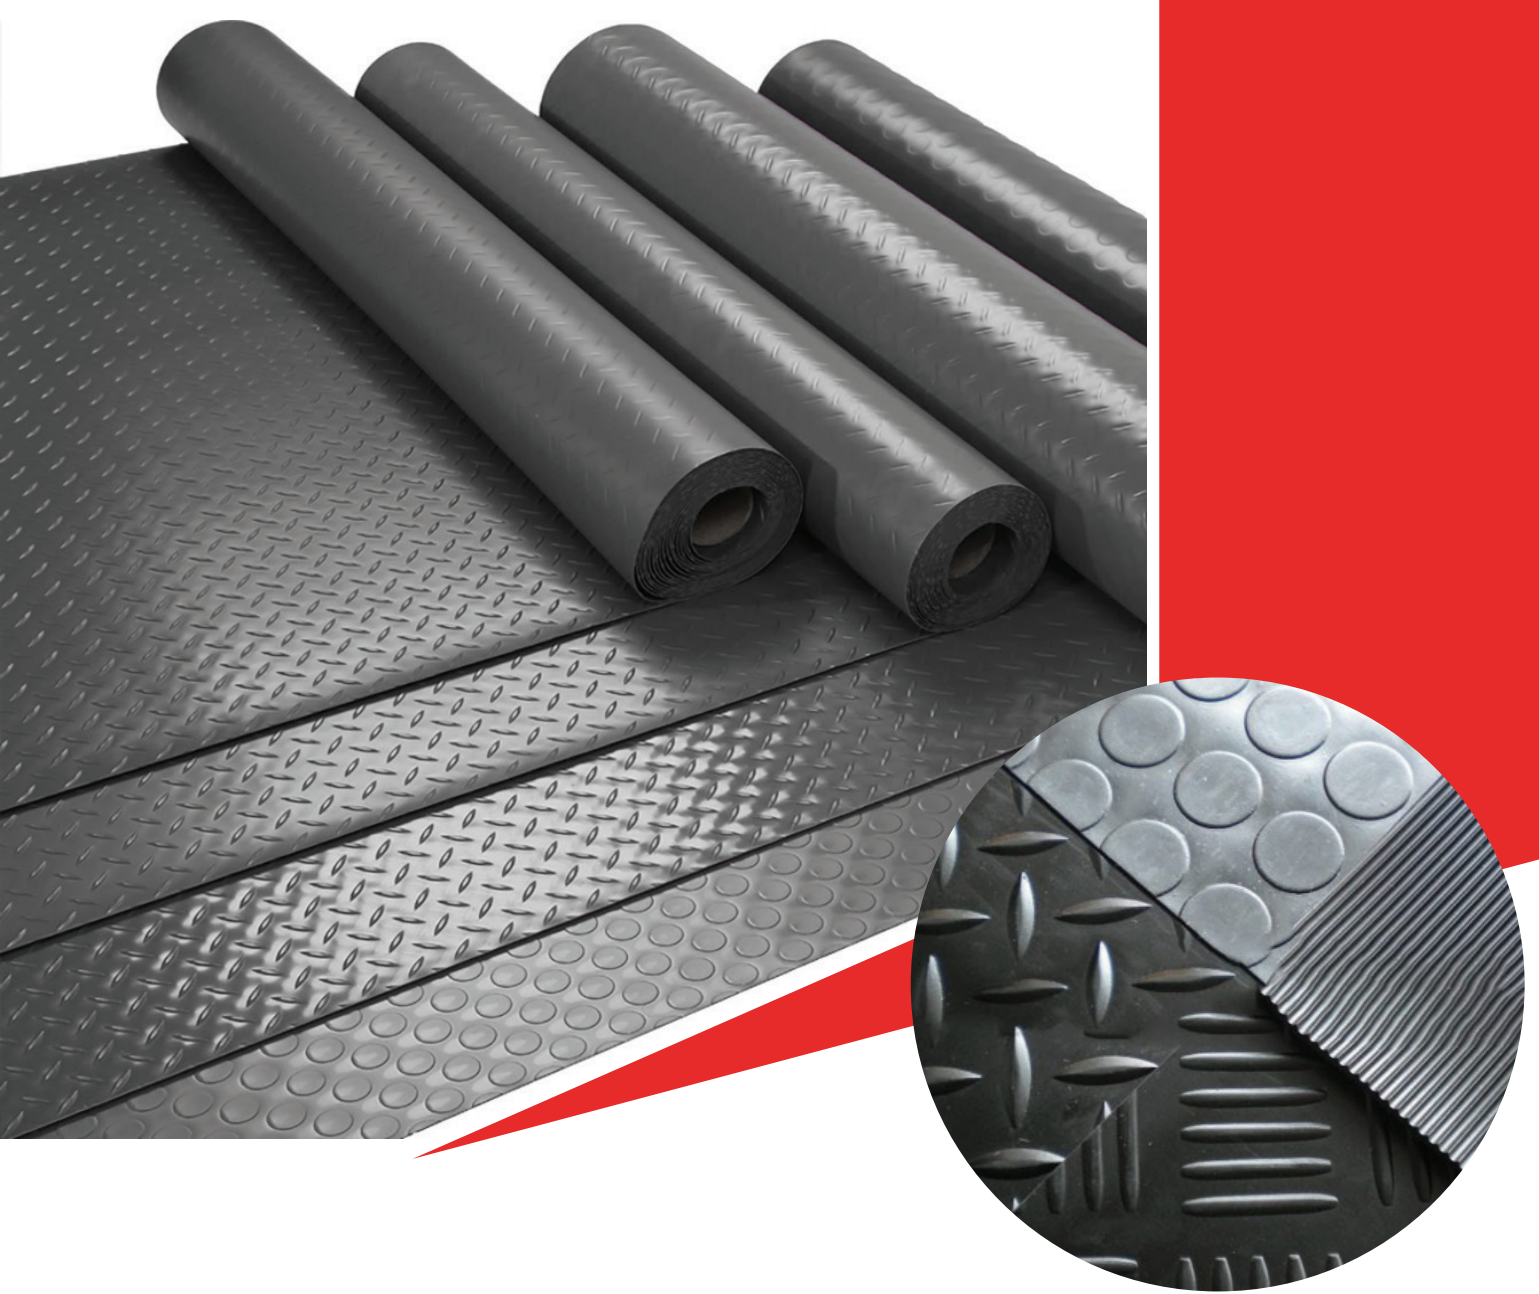

Why

Choose us?



We specialize in standard and custom rubber sheet products in International standards and quality systems. Offering high quality products and professional solution to meet the customer satisfaction.

We manufacture rubber products since 1968

R&D LABORATORY

We have a professional product testing and R&D laboratory, which can test specifications such as density, strength, tensile, oil resistance, aging, etc

QUALITY INSPECTION

We have perfect product quality inspection system, every link of the production process has strict quality inspection standards, including raw materials, compounding rubber, mixing ratio of auxiliary materials, the surface and size of the vulcanization process, packaging and other aspects of the responsible process to ensure that the quality of each product off the line is stable.

EXCELLENT WORKERS

35% of our employees graduated from undergraduate and 55% from junior college. And 40% of our workers have 10+ years production experience. All workers will be strictly trained before work. Workers will be taken 2 weeks theory training and 2 weeks practical training. In this way, we can ensure that all workers can operate the machinery safely and skillfully and ensure the good quality of the product.

Natural Rubber Sheet

Natural rubber with optimal elastic resilience to wear and resistance ,cutting, and laceration. Exceptional Elongation against breakage. Widely used in various industrial seals.Super abrasion resistance, excellent resistance to impact, cut and tear outstanding tensile strength, high resilience.

Thickness: 1mm to 50mm
Width: 1m to 2m
Standard width: 1m, 1.2m
Length: 1m to 50m
Standard length: 5m,10m, 20m



	Hardness Shore A	Density G/cm3	Tensile Strength	Elongation	Temperture Range	Abrasion
Natural rubber sheet	40 +/-5	1.05	17	650%	-25 - 80	120
Natural rubber sheet	45 +/-5	1.2	15	400%	-25 - 80	120
Natural rubber sheet	50 +/-5	1.3	8	300%	-25 - 80	150
Natural rubber sheet	50 +/-5	1.35	5	300%	-25 - 80	150

- Cloth insertion, nylon insertion available.
- Cloth impression finish available
- Custom specifications, shapes and sizes available
- sheet 20- %300 10 1.35 5-/+ 50
- All colors available.
- Cloth insertion, nylon insertion available.
- New product formula can be designed by request.

SBR Rubber Sheet

ood resistance to abrasion, high temperature, and aging. It is used for gaskets, flooring and etc. Suitable for current use where particular resistances to atmospheric agents, oils and heat are not required.

Thickness: 1mm to 100mm
Width: 1m to 2m
Standard width: 1m, 1.2m
Length: 1m to 50m
Standard length: 5m,10m, 20m



- Cloth insertion, nylon insertion available.
- Cloth impression finish available
- Custom specifications, shapes and sizes available
- All colors available.
- Cloth insertion, nylon insertion available.
- New product formula can be designed by request.

	Hardness Shore A	Density G/cm3	Tensile Strength	Elongation	Temperture Range
SBR rubber sheet	70 +/-5	1.7	2	180%	-20 - 80
SBR rubber sheet	65 +/-5	1.6	2.5	200%	-20 - 80
SBR rubber sheet	65 +/-5	1.5	3	250%	-20 - 80
SBR rubber sheet	80 +/-5	1.5	3	200%	-20 - 80
SBR rubber sheet	60 +/-5	1.4	5	250%	-20 - 80
SBR rubber sheet	60 +/-5	1.35	6	250%	-20 - 80
SBR rubber sheet	50 +/-5	1.35	6	300%	-20 - 80

NBR Rubber Sheet

Nitrile rubber known as NBR, Buna-N, proving excellent resistance to petroleum oils as well as mineral and vegetable oils. NBR rubber sheet widely use in automotive and aeronautical industry to make fuel and oil seals, self-sealing feul tanks lining.

Thickness: 1mm to 100mm
Width: 1m to 2m
Standard width: 1m, 1.2m
Length: 1m to 50m
Standard length: 5m,10m, 20m



- Cloth insertion, nylon insertion available.
- Cloth impression finish available
- Custom specifications, shapes and sizes available
- All colors available.
- Cloth insertion, nylon insertion available.
- New product formula can be designed by request.

	Hardness Shore A	Density G/cm3	Tensile Strength	Elongation	Temperture Range
NBR rubber sheet	80 +/-5	1.5	4	200%	-20 - 100
NBR rubber sheet	65 +/-5	1.5	3	250%	-20 - 90
NBR rubber sheet	65 +/-5	1.5	4	250%	-20 - 90
NBR rubber sheet	65 +/-5	1.4	5	250%	-20 - 90
NBR rubber sheet	65 +/-5	1.4	6	300%	-20 - 100
NBR rubber sheet	65 +/-5	1.4	8	300%	-20 - 100
NBR rubber sheet	60 +/-5	1.4	10	300%	-20 - 110
NBR rubber sheet	50 +/-5	1.35	10	300%	-20 - 110

Neoprene Rubber Sheet (CR Rubber Sheet)



Neoprene rubber sheet is a polymer that provides moderate oil&gasline resistance, very good resistance to ozone&sunlight, excellent adhesion to fabric&metal, good resistance to abrasion&flex cracking and very good resistance to alkalis&acids

Thickness: 1mm to 100mm
Width: 1m to 2m
Standard width: 1m, 1.2m
Length: 1m to 50m
Standard length: 5m, 10m, 20m



- Cloth insertion, nylon insertion available.
- Cloth impression finish available
- Custom specifications, shapes and sizes available
- All colors available.
- Cloth insertion, nylon insertion available.
- New product formula can be designed by request.

	Hardness Shore A	Density G/cm3	Tensile Strength	Elongation	Temperture Range
Neoprene rubber sheet	80 +/-5	1.5	4	200%	-20 ~ 80
Neoprene rubber sheet	65 +/-5	1.5	3	250%	-20 ~ 80
Neoprene rubber sheet	65 +/-5	1.5	4	250%	-20 ~ 80
Neoprene rubber sheet	65 +/-5	1.4	5	250%	-20 ~ 90
Neoprene rubber sheet	65 +/-5	1.4	6	300%	-20 ~ 100
Neoprene rubber sheet	65 +/-5	1.4	8	300%	-30 ~ 100
Neoprene rubber sheet	60 +/-5	1.35	10	300%	-30 ~ 100

EPDM Rubber Sheet


EPDM rubber sheet has excellent resistance to weathering and ozone, and very good aging resistance, which makes it perfect material to use under exposed environment. They are highly recommended at areas where surface is exposed to weather, sunlight, heat ozone or gases

Thickness: 3mm to 50mm

Width: 1m

Length: 1m to 20r

Standard length: 5m,10m, 20m

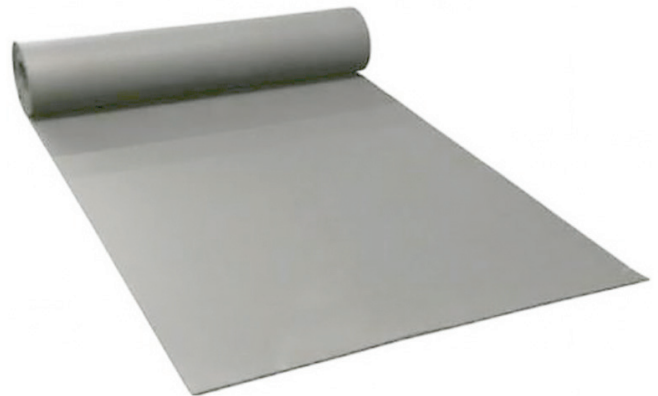

- Custom specifications, shapes and sizes available
- All colors available.
- New product formula can be designed by request.


	Hardness Shore A	Density G/cm3	Tensile Strength	Elongation	Temperture Range
EPDM foam rubber sheet	15 +/-5	0.4	0.7	250%	-60 ~ 135
EPDM foam rubber sheet	25 +/-5	0.5	0.7	250%	-60 ~ 135
EPDM foam rubber sheet	35 +/-5	0.6	0.7	250%	-60 ~ 135
EPDM foam rubber sheet	35 +/-5	0.8	0.8	250%	-40 ~ 120

Butyl Rubber Sheet (IIR Rubber Sheet)



Butyl rubber has good weather resistance, ozone aging resistance, heat aging resistance, excellent polar solvent resistance and water resistance, good point insulation and high air tightness. It is used for equipment sealing projects, industrial and mining enterprises, pipeline sealing, and can also be used as machine gasket, automobile seal, surface laying, buffer gasket, industrial water w pipee seal,, oil pipe seal, etc.

Thickness: 1mm to 50 mm
Width: 1m, 1.2m
Standard width: 1m, 1.2m
Length: 1m to 50m
Standard length: 5m,10m

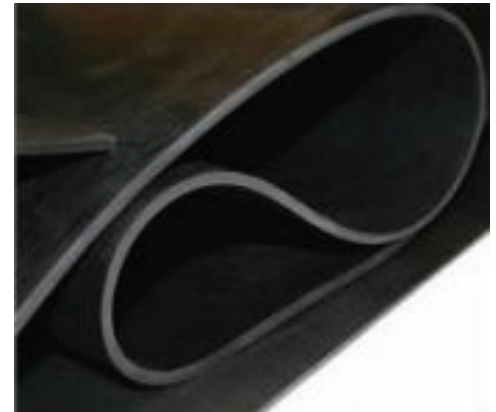

- All colors available
- Cloth insertion, nylon insertion available
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

	Hardness Shore A	Density G/cm ³	Tensile Strength	Elongation	Temperture Range
Butyl Rubber Sheet	55 +/-5	1.5	4	300%	-60 ~ 120

Acid and alkali resistance: 42 % H_2SO_4 and 30% NaOH in 24hours*7days

Insulating Rubber Sheet

Electrical rubber mats are made of specially compounded non-conductive material, designed to prevent human from electric shock working. It can be used on floors around control panels, switch boards, transformers and other high voltage workplace which are prone to electric current

Thickness: 3mm to 50mm
Width: 1m-2m
Standard width: 1m, 1.2m
Length: 1m to 50m
Standard length: 5m,10m



	Hardness Shore A	Density G/cm ³	Tensile Strength	Elongation	Voltage	Temperature Range
3mm	65 +/-5	1.5	4	300	-20 ~ 80	10
6mm	65 +/-5	1.5	4	300	-20 ~ 80	25
9mm	65 +/-5	1.5	4	300	-20 ~ 80	35
12mm	65 +/-5	1.5	4	300	-20 ~ 80	45

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.
- Different patterns are available.

Flame Retardant Rubber Sheet

Our flame retardant rubber sheet is a premium-grade neoprene material that has been manufactured to fully conform to UL94-VO standards. Using this product can greatly help to reduce the spread of flame as well as reducing the smoke density and toxicity. We can also produce this material in a variety of formats such as; full rolls, stripped cut lengths and bespoke gaskets and shapes

Thickness: 1mm to 100mm
Width: 1m to 2m
Standard width: 1m, 1.2m
Length: 1m to 50m
Standard length: 5m, 10m, 20m




	Hardness Shore A	Density G/cm3	Tensile Strength	Elongation	Grade
Flame retardant rubber sheet	70 +/-5	1.5	4	200%	UL94-VO

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.
- Different patterns are available.

Oil Resistant Rubber Sheet

Oil resistant rubber sheets are products which have at base nitrile butadiene resistant to fuel. Can be manufactured also from SBR and NBR compound, resistant at mineral oils and vegetal fats. Very good resistance to oil and gasoline; superior resistance to petroleum-based hydraulic fluids; wide range of service temperatures; good resistance to hydrocarbon solvents.

Thickness: 1mm to 100mm
Width: 1m to 2m
Standard width: 1m, 1.2m
Length: 1m to 50m
Standard length: 5m, 10m, 20m

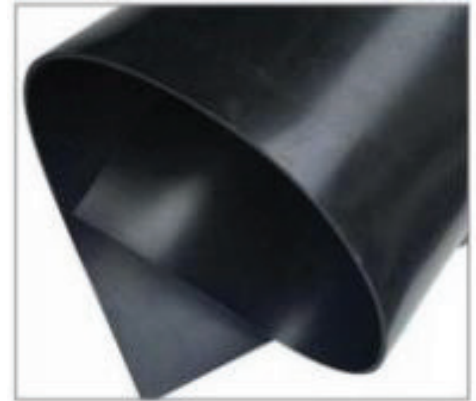


Hardness Shore A	Density G/cm ³	Tensile Strength	Elongation	Temp.	Grade
65 +/-5	1.5	4	250%	-20 ~ 100	Timely cleaning oil drop
65 +/-5	1.4	5	350%	-20 ~ 100	Resistant to gasoline
65 +/-5	1.3	10	400%	-20 ~ 100	Resistant to gasoline, engine oil and diesel, can be soaked for a long time

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

Abrasion Resistant Rubber Sheet

Abrasion-resistant rubber sheet is highly resistant to corrosion, and also give excellent resistance to impact. They also have a wide range of temperatures within which they can operate without any problems. We supply abrasion resistant rubber sheeting in a range of different grades and to an array of different industries. Quarry linings, mining applications, chute lining, target backing curtains and many more

Thickness: 1mm to 100mm
Width: 1m to 2m
Standard width: 1m, 1.2m
Length: 1m to 50m
Standard length: 5m, 10m, 20m

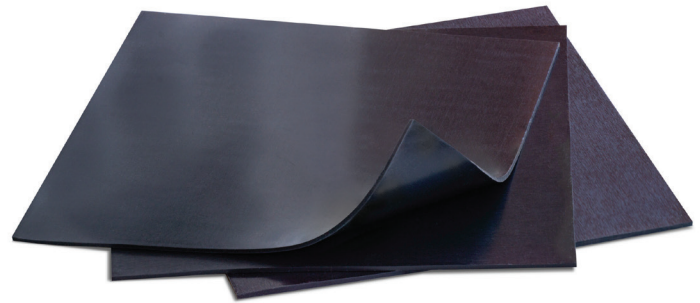

Hardness Shore A	Density G/cm3	Tensile Strength	Elongation	Temp.	Grade	
Natural rubber sheet	40 +/-5	1	17	650%	-20 ~ 80	60
Natural rubber sheet	40 +/-5	1.05	17	650%	-20 ~ 80	120
Natural rubber sheet	60 +/-5	1.2	15	300%	-20 ~ 80	90
Natural rubber sheet	65 +/-5	1.25	10	300%	-20 ~ 80	150

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

Acid and Alkali Resistance Rubber Sheet

Acid-resistant rubber sheets have excellent performance against alkalis, acids, and gases. This characteristic of acid-resistant rubber, along with its flexibility and endurance against aging makes it frequently used rubber for many industrial applications.

Thickness: 1mm to 100mm
Width: 1m to 2m
Standard width: 1m, 1.2m
Length: 1m to 50m
Standard length: 5m, 10m, 20m



	Hardness Shore A	Density G/cm ³	Tensile Strength	Elongation	Temp.
Acid and alkali resistance rubber sheet	70 +/-5	1.5	4	280%	-60 ~ 120

High-temperature Rubber Sheets

Excellent high and low temperature range without failure. The best oil resistance, high temperature resistance, anti-chemical corrosion and aging resistance.


Thickness: 0.1mm to 30mm

Width: 1m to 3m

Standard width: 1m, 1.2m

Length: 1m to 50m

Standard length: 5m, 10m

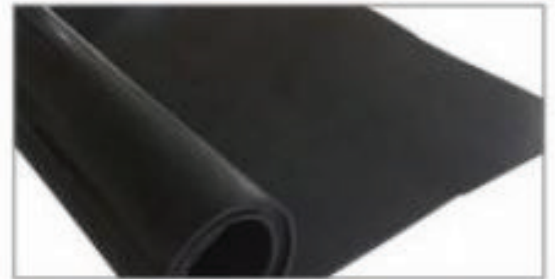


- All colors available
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

	Hardness Shore A	Density G/cm ³	Tensile Strength	Elongation	Temp.
Silicone rubber sheet	40 +/-5	1.25	7	350%	-60 ~ 220
Silicone rubber sheet	55 +/-5	1.25	7	400%	-60 ~ 300
FKM rubber sheet	70 +/-5	2	6	200%	-60 ~ 220

High Tear-resistance Rubber Sheet

High tear-resistance rubber sheet it is a silicone membranes for vacuum presses machine. Our high-quality silicone rubber membranes are suitable for all types of vacuum membrane presses and solar laminators. The silicone membranes for vacuum presses have an elasticity of 700%. The silicone sheets for laminating machines have high resistance to tearing, dynamic tension, and compression loads.

Thickness: 0.1mm to 30mm
Width: 1m to 3m
Standard width: 1m, 1.2m
Length: 1m to 50m
Standard length: 5m,10m

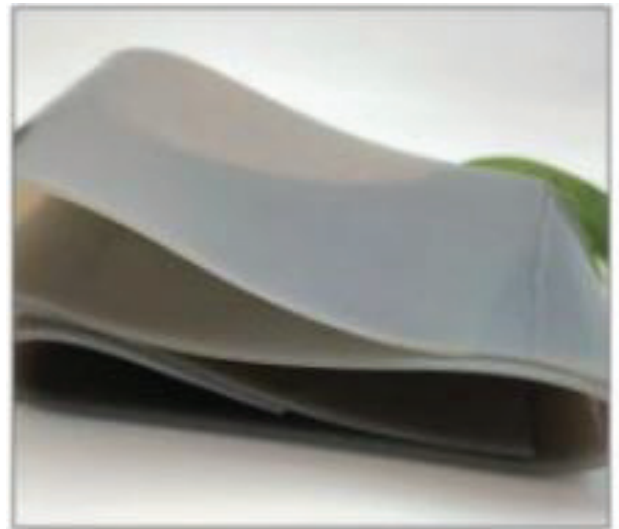

- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

	Hardness Shore A	Density G/cm3	Tensile Strength	Elongation	Temp.
High tear-resistance rubber sheet	40 +/-5	1.25	10	700%	-60 ~ 260

Aging Resistant Rubber Sheet

EPDM rubber sheet has excellent resistance to weathering and ozone, and very good aging resistance, which makes it perfect material to use under exposed environment. They are highly recommended at areas where surface is exposed to weather, sunlight, heat, ozone or gasses.

Thickness: 1mm to 100mm
Width: 1m to 2m
Standard width: 1m, 1.2m
Length: 1m to 50m
Standard length: 5m, 10m, 20m



- All colors available
- Cloth insertion, nylon insertion available
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

Hardness Shore A	Density G/cm3	Tensile Strength	Elongation	Temp.	Grade
65 +/-5	1.35	7	350%	-30 ~ 120	Mainly used for gasket, dam protection, bridge support and roof protection
65 +/-5	1.2	10	450%	-40 ~ 130	Used on outdoor place with high requirements and long service time

Food Grade Rubber Sheet

Usually we have four most popular food-grade rubber materials: Neoprene, EPDM, NBR and silicone, they have many characteristics in common; they are all recommended for repeated food contact, are manufactured with non-toxic and non-allergenic material

Thickness: 1mm to 100mm
Width: 1m to 2m
Standard width: 1m, 1.2m
Length: 1m to 50m
Standard length: 5m, 10m, 20m



- All colors available
- Cloth insertion, nylon insertion available
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

	Hardness Shore A	Density G/cm3	Tensile Strength	Elongation	Temp.
Food grade Neoprene rubber sheet	65 +/-5	1.5	5	300%	-20 ~ 100
Food grade EPDM rubber sheet	65 +/-5	1.5	5	300%	-20 ~ 120
Food grade NBR rubber sheet	65 +/-5	1.5	5	300%	-20 ~ 100
Food grade Silicone rubber sheet	55 +/-5	1.25	7	400%	-60 ~ 220

Skirt-board Rubber Sheet

Skirt-board is a sturdy sheet product designed for use as a general industrial padding and gasket. Typical applications include street sweepers, abrasion resistant applications, snowplow blades, airfield applications, bet wiper.

Thickness: 1mm to 100mm
Width: 20mm to 2m
Standard width: 100mm, 150mm, 200mm, 250mm
Length: 1m to 50m
Standard length: 5m, 10m



- All colors available
- Cloth insertion, nylon insertion available
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.

	Hardness Shore A	Density G/cm ³	Tensile Strength	Elongation	Temp.
Skirt-board rubber sheet	65 +/-5	1.5	3	250%	-20 ~ 120
Skirt-board rubber sheet	65 +/-5	1.4	6	300%	-20 ~ 120
Skirt-board rubber sheet	65 +/-5	1.3	10	350%	-20 ~ 120
Skirt-board rubber sheet	40 +/-5	1.05	17	650%	-20 ~ 80

Rubber Block

Rubber block can be used wet or dry without the chance of slipping. It allows one to remove dents and straighten metals without without distort distorting or scratching the surface. This block is very handy for hammering, filing and other uses.

Thickness: 1mm to 100mm
Width: 40mm to 2m
Standard width: 0.5m, 1m, 1.2m
Length: 1m to 50m
Standard length: 1m,2m



- All colors available
- Cloth insertion, nylon insertion available
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

	Hardness Shore A	Density G/cm3	Tensile Strength	Elongation	Temp.
Rubber Block	65 +/-5	1.5	3	250%	-20 ~ 110
Rubber Block	65 +/-5	1.4	6	300%	-20 ~ 110

Anti-slip rubber mat


Rubber block can be used wet or dry without the chance of slipping. It allows one to remove dents and straighten metals without without distort distorting or scratching the surface. This block is very handy for hammering, filing and other uses.




Rubber Sheet 1



Rubber Sheet 2



Stud / Round Button Rubber Mat




Fine Ribbed Rubber Mat




Checker Rubber Mat




Diamond Rubber Mat



Middle Ribbed Rubber Mat



Wide Ribbed Rubber Mat



Round small Rubber Mat

Thickness: 1mm to 100mm

Width: 40mm to 2m

Standard width: 0.5m, 1m, 1.2m

Length: 1m to 50m

Standard length: 1m, 2m

- All colors available
- Cloth insertion, nylon insertion available
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

Material	Hardness Shore A	Density G/cm3	Tensile Strength	Elongation	Temp.
SBR/NR	65 +/-5	1.5	3	250%	-20 ~ 120

Anti Static Rubber Mat

Our anti static rubber mat manufactured using electrostatic conductive materials. electrostatic dissipative material and synthetic rubbers. Our ESD matting is often used in high grade laboratories and workshops for electronic semiconductor devices, computers communication devices, and integrated circuits, as a table top mat, work surface mat, shelf mat or floor mat.



All colors available.
Cloth impression back surface and pattern front surface available.
Custom specifications, shapes and sizes available
New product formula can be designed by request.

Type: 2 layers; 3 layers
Thickness: 2mm; 3mm; 5mm
Length: 5m-30m
Width: 1.2-0.6m
Standard size: 2mm x 0.6m x 10m;
2mm x 0.9m x 10m;
2mm x 1.0m x 10m; 2mm x 1.2m x 10m
Pattern: Smooth or textured
Specific Gravity: 1.5g/cm³
Color: Blue+Black, Grey+Black, Green+Black
Surface resistivity of the top layer:
9¹⁰-6¹⁰ Ohms
Surface resistivity of the bottom layer:
5¹⁰-3¹⁰ Ohms
Typical Value Tensile: 3.0Mpa
Elongation: 260%

Material	Hardness Shore A	Density G/cm ³	Tensile Strength	Elongation	Temp.
SBR/NR	65 +/-5	1.5	3	250%	-20 ~ 120

Rubber Sheet Storage Guide



Most rubber products suffer alterations in their physical properties if stored for a certain period of time. Therefore, these items will not retain all their properties if stored for a long period of time before use (excessive hardness, softening of the rubber, or cracking of the exterior are some examples).

These changes may be the result of a particular factor or a combination of circumstances, such as the effects caused by oxygen, ozone, sunlight, heat or humidity. The adverse effects of these factors can be reduced by careful storage conditions.

Protective measures - Storage area conditions

COOL

Optimum temperature is 10° C. The temperature should not be less than 0°C and should not exceed +30°C. In case the temperature is expected to be below 0° C, care should be taken to increase the temperature of the parts gradually in order to avoid damage.

DRY ENVIRONMENT

It is advisable to maintain an ambient humidity level between 45 and 70%, as an excessively dry environment is detrimental to the rubber. Small deviations during short periods are however admissible.



Thank You ..

www.marso-egy.com