

Measuring Cognitive Load Based on EEG Data in the Intelligent Learning Systems

Marina Murtazina^a and Tatiana Avdeenko^a

^a Novosibirsk State Technical University, 20, Karla Marksa av., Novosibirsk, 630073, Russia

Abstract

The article presents the application of the EEG neuroheadset as a component of intelligent learning systems. Traditionally, intelligent learning systems include three knowledge representation models: an expert model, a mentor model, and a student model. The student model reflects the level of his knowledge, as well as how the task is perceived, how the student reacts to the warning and help of the mentor. The inclusion into the student model of the indicators of his reaction to the task based on the analysis of physiological signals seems to be an extremely promising direction of research aimed at improving learning outcomes and developing individual computer-based teaching methods based on feedback. One of the important indicators that can be monitored using the EEG is cognitive load. The paper analyzes methods for measuring cognitive load based on EEG data. An approach to organizing the monitoring of cognitive load using Python libraries is proposed. The MNE library was used to process the EEG data, and the PyEEG library was used to extract the features from the EEG.

Keywords ¹

Intelligent learning systems, EEG, cognitive load

1. Introduction

Currently, one of paradigms for constructing intelligent learning systems is presentation of the educational process as a student knowledge management process. Intelligent learning systems are based on the idea of selecting an individual training scenario, taking into account the cognitive abilities of the student. It is known from educational psychology that teaching is most effective when the educational process is organized in such a way that to prevent cognitive overload of the student which results in dulling physiological attention. Learning performance can be improved by adapting learning tasks to human information processing capabilities. Currently, within pedagogical neuroscience, innovative methodologies are being developed for analyzing cognitive load of students on the basis of measuring physiological indicators. The electroencephalogram (EEG) is considered as a highly sensitive tool for adapting the process of human-computer interaction to the psychophysiological student state. The availability of devices based on non-invasive EEG allows to improve understanding of basic mechanisms of perception of teaching materials [1]. In this regard, the issues of monitoring the cognitive load of a student to increase the effectiveness of his work in the training system, as well as issues of choosing information technologies that provide such monitoring, are relevant.

The development of methods for measuring cognitive load from the EEG data is an area of active research. Thus, the work [2] investigates the EEG frequency ranges that can be used to measure cognitive load, and proposes a method for measuring cognitive load using the EEG power spectrum. The advantages of the method proposed in [2] for measuring cognitive load from the EEG data is its

SLET-2020: International Scientific Conference on Innovative Approaches to the Application of Digital Technologies in Education, November 12-13, 2020, Stavropol, Russia

EMAIL: murtazina@corp.nstu.ru (Marina Murtazina); avdeenko@corp.nstu.ru (Tatiana Avdeenko)

ORCID: 0000-0001-6243-9308 (Marina Murtazina); 0000-0002-8614-5934 (Tatiana Avdeenko)



© 2020 Copyright for this paper by its authors.

Use permitted under Creative Commons License Attribution 4.0 International (CC BY 4.0).

CEUR Workshop Proceedings (CEUR-WS.org)

independence from the assessment method. The disadvantages include the need of using expensive equipment, long analysis time, and the necessity for expert knowledge while interpretation. The work [3] discusses the issues of determining the optimal sets of EEG electrodes resistant to differences between people, tasks and sessions for monitoring cognitive load. In [4] electroencephalography is proposed as an additional tool for assessing cognitive load.

The work [5] presents methodology for measuring cognitive load in a multimedia learning environment using EEG data. The effectiveness of subtitles as educational support in educational videos is investigated. It is recommended to use the power spectrum in the alpha band when investigating the effect of various components of multimodal texts on cognitive load. The work [6] touches upon the development of intelligent learning systems that can assess the state of a student according to EEG data and adapt to this state. Spectral features extracted from EEG data are used to simulate the cognitive load of a user of an intelligent learning system. In [7], a multi-agent system is proposed that predicts the emotional response of a student based on brain waves.

This paper analyzes possibilities of using the EEG data for intelligent learning systems. The object of the research is the organization of monitoring of cognitive load based on EEG data. The paper is organized as follows. Section 1 substantiates the relevance of the research topic and provides an overview of publications on the research topic. Section 2 analyzes the main ideas of using the EEG neuroheadset as a component of intelligent learning systems. Section 3 discusses the issues of measuring cognitive load based on EEG data and proposes an approach to organizing monitoring of cognitive load using Python libraries. Section 4 summarizes the work done.

2. Using a EEG neuroheadset as an intelligent learning system component

2.1. EEG neuroheadset

Development of neurotechnologies has led to the emergence of consumer-grade neurointerfaces that allow recording EEG signals. In this regard, the possibilities of using EEG neuroheadsets in the educational process, in particular, for monitoring the cognitive load of a student, began to be actively investigated. The Emotiv Epoc and OpenBCI neuroheadsets are among the market leaders between portable neurotechnical research devices [8]. It is explained by the large number of electrodes compared to other neuroheadsets using from 1 to 4 electrodes. For registration the EEG data by professional electroencephalographs, the International Federation of Electroencephalography and Clinical Neurophysiology have recommended the Electrode Placement System 10-20. The name of the electrode placement system reflects the technique of placing the electrodes on the head surface. System 10-20 originally determined positions of 21 electrodes. With the development of multichannel EEG hardware systems, the number of electrodes has increased to 74. This extended 10-20 system is known as the 10-10 system. When applying electrodes according to the 10-20 (10-10) system, the distance between the nasion (middle of the bridge of the nose) and the inion (hard bone tubercle on the back of the head) is measured. The distance between the left and right ear fossa is also measured. The electrodes are positioned at intervals of 10% or 20% of the measured distances. The name of each electrode consists of the Latin letter and the number. The letter indicates the name of the brain region: prefrontal (Fp), frontal (F), temporal (T), parietal (P), occipital (O), central (C). The Z marker is used to mark the electrodes placed on the median line. The electrode placed on the inion is designated with the letter I. The electrodes on the earlobes are marked with the letter A. The number in the name of the electrode indicates the hemisphere. Even numbers are used for electrodes placed on the right hemisphere, odd numbers on the left. T8, T7, P8 and P7 electrodes from the 10-10 arrangement are equivalent to the T4, T3, T6, T5 electrodes from the 10-20 arrangement [9].

Compliance with the standard 10-20 (10-10) system is also carried out when creating various consumer-grade neurodevices. However, if in professional electroencephalographs the number of electrodes involves the installation of at least 21 electrodes, then the number of electrodes in consumer-grade neurodevices is much less. Figure 1 shows a comparison between the international 10-10 electrode placement system and the Emotiv Epoc neuroheadset. The latter includes 14 electrodes. The location of electrodes is fixed.

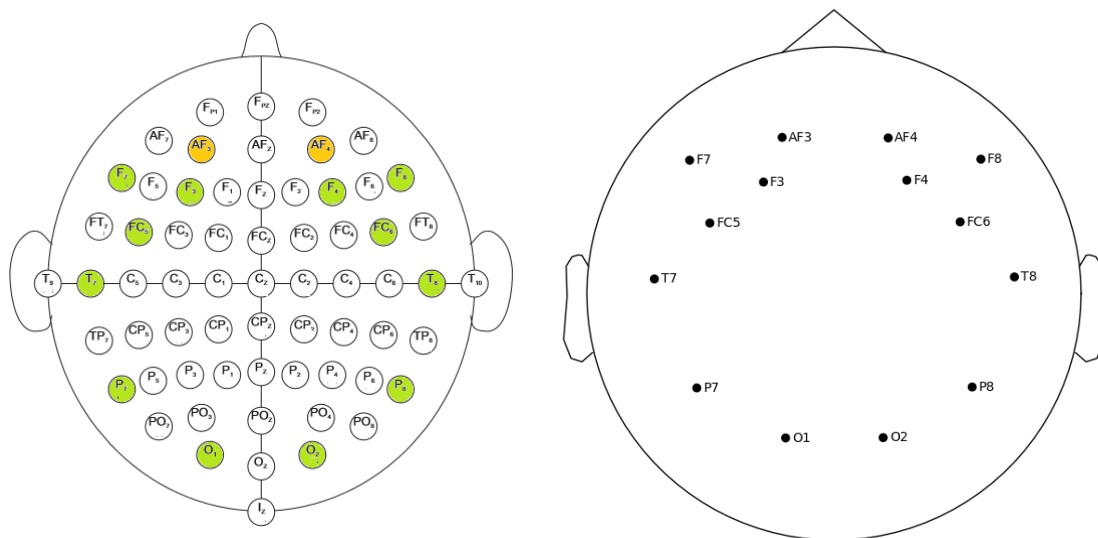


Figure 1: Placement of electrodes according to the international system 10-10 and Emotiv Epoc neuroheadset

OpenBCI is an open platform based on the ADS1299 Texas Instrument micro-controller to provide users with an access to the raw data on brain wave activity without rigid restrictions on the number and placement of electrodes. OpenBCI offers a variety of data acquisition boards (4, 8 and 16 electrodes) that connect to PCs, laptops, smartphones, and any Bluetooth enabled device. OpenBCI board electrodes can be used with a 3D printed headset, an OpenBCI EEG Electrode Cap, and any traditional system of cup electrode attachment. Figure 2 shows a comparison of the international 10-10 electrode placement system and a typical electrode placement on an OpenBCI EEG 3D printed headset.

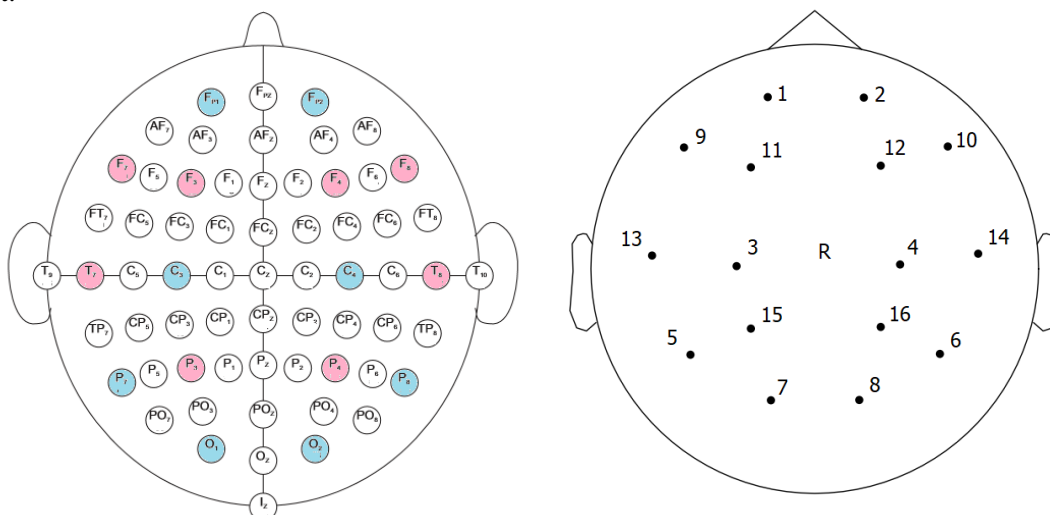


Figure 2: Placement of electrodes according to the international system 10-10 and OpenBCI neuroheadset

Traditionally, five frequency ranges are distinguished in the EEG: δ delta (less than 4 Hz), θ theta (from 4 to less than 8 Hz), α alpha (from 8 to less than 13 Hz), β beta (from 13 to less than 30 Hz), γ gamma (more than 30 Hz) [10]. With neurological activity in different areas of the brain, electrical waves are generated at different frequencies with greater or lesser strength, depending on the cognitive task being performed. EEG allows recording electrical signals that are generated during activation and deactivation of neurons involved in a cognitive task.

2.2. Intelligent learning systems

Intelligent learning systems are aimed at optimizing the learning process for each user of the system. To this end, they create and maintain domain knowledge models, learning process model, student model, and an interface model. A domain knowledge model (or an expert's model) defines a set of elementary knowledge that a student must assimilate in the process of studying an academic discipline. The learning process model (or mentor model) formalizes pedagogical strategies and provides a decision-making process on the tactics of providing educational information to the user, based on the student's knowledge model. The student model includes facts and relationships regarding the student's knowledge and skills in the field of knowledge being studied. The student's model is a formatted description of the learner in the educational process: how he perceives the task, what he does, how he answers questions, how he asks, how he reacts to the warning and help of the mentor. The interface model controls the interaction between the user and the intelligent learning system [11, 12].

The first intelligent learning environments appeared in the 1970s. Since then, many learning systems of this class have been developed. The best known among them are SHERLOCK, SQL-Tutor, ActiveMath, Guru [11, 13]. Nowadays, creating intelligent learning systems is a rapidly growing field that develops and implements customized computer-based teaching and feedback methods without human intervention. One of the latest trends in the development of intelligent learning systems has become the use of technologies for collecting and analyzing physiological signals, such as EEG and ECG, to ensure adaptation of the content provided by the intelligent learning system to the user, depending on the mood, cognitive load, attentiveness and emotional reactions of the student [13, 14].

The architecture of an intelligent learning system with the use of an EEG neuroheadset assumes that the intelligent learning system receives, as additional data, the results of the assessment and / or the predicted state of the student according to the EEG data. Figure 3 shows a generalized architecture of an intelligent learning system using an EEG neuroheadset.

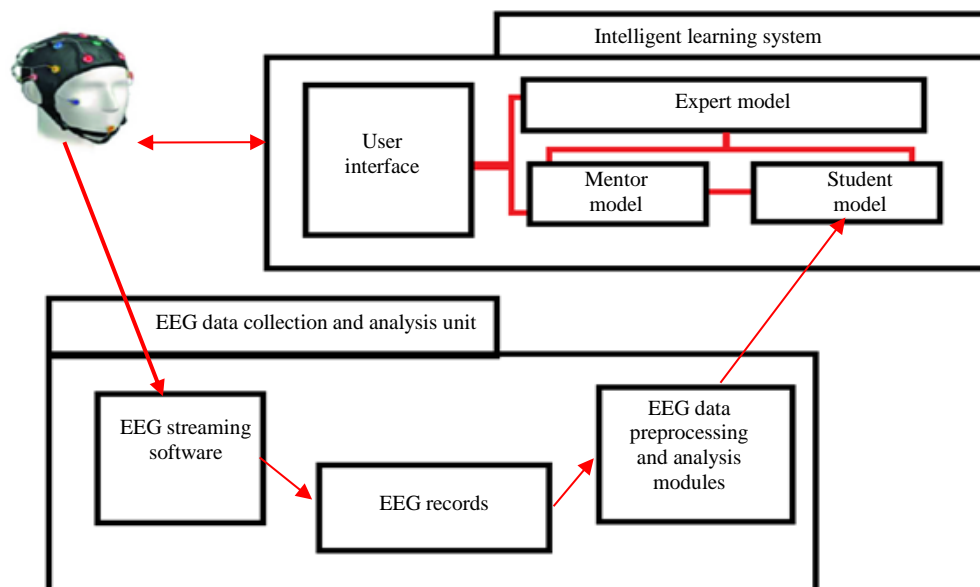


Figure 3: Generalized architecture of intelligent learning system using an EEG neuroheadset

The student wears an EEG neuroheadset when interacting with the intelligent learning system through the user interface. The EEG Analysis module processes physiological EEG signals and transmits the results for inclusion into the student's model. The main limitations of using EEG neuroheadsets include the following: cost, the need of training the system to interpret EEG data for a specific user, response delay, since the data is analyzed over a certain period of time, discomfort from

wearing the headset. In addition, the differences in the number of electrodes challenge the developers of EEG data processing and analysis modules for intelligent learning systems with the task of comparing the electrodes arrangement on neuroheadsets and applying feature extraction methods taking into account a specific set of electrodes on the neuroheadset.

2.3. Measuring cognitive load using EEG data

Cognitive load is a quantitative measure of the mental effort required to complete a task [15]. Cognitive load reflects the resources spent by working memory. Methods for measuring cognitive load are divided into subjective and objective. The first group of methods for measurement uses subjective rating scales, such as NASA-TLX or an adapted version of Paas's 9-point symmetric categorical scale for assessing mental effort. Subjective assessment is usually made by answering the question "Please rate the amount of mental effort invested in the task" on a qualitative scale (from "very very low mental effort" to "very, very high mental effort"). The question is asked immediately after completion of the tasks. Subjective rating scales do not provide an indication of fluctuations in cognitive load during task performance. Objective methods for measuring cognitive load are divided into two groups: methods for measuring cognitive load for secondary tasks and methods based on measuring physiological indicators. The most widely used methods of the latter group are methods for assessing cognitive load according to EEG data [16].

Currently, there is no unambiguous way to assess cognitive load using EEG data. The most commonly used methods include [16, 17]:

- 1) event-related desynchronization and synchronization (ERD / ERS index),
- 2) theta-alpha ratio (TAR index),
- 3) methods based on machine learning.

The first method reflects the percentage decrease (event-related desynchronization, ERD) or increase (event-related synchronization; ERS) in band power during the activation interval compared to the baseline interval. The baseline (or reference) interval usually reflects the period of time before the stimulus without any requirement for the task. The activation interval refers to the time period while working on a task. To assess the cognitive load, the ERD / ERS index is used, which can be calculated using the formula [16]:

$$\frac{ERD}{ERS} \% = \frac{BaseLineIntBandPower - TaskIntBandPower}{BaseLineIntBandPower} \times 100, \quad (1)$$

where BaseLineIntBandPower is baseline interval band power, TaskIntBandPower is task interval band power.

Measurement of the ERD / ERS index is done for each electrode and task and then averaged over the tasks to improve reliability.

The second method is based on the calculation of the theta-alpha ratio, which in recent years has been considered as a potentially important indicator of the study of cognitive abilities. It is assumed that the theta-alpha ratio differs depending on age and cognitive abilities, and therefore this indicator can be used both to measure cognitive load and to identify cognitive impairments in the elderly [18]. The TAR index can be calculated using the following formula [17]:

$$TAR = \frac{\theta F3 + \theta F4}{\alpha P7 + \alpha P8}, \quad (2)$$

where $\theta F3$ and $\theta F4$ are spectral powers of theta band in the electrodes F3 and F4 (frontal region in both hemispheres of the brain), $\alpha P7$ и $\alpha P8$ are the spectral powers of the alpha band in the electrodes P7 and P8 (parietal region of both hemispheres of the brain). Spectral power for frequency bands can be obtained using Fast Fourier Transform.

The third group of methods presupposes the presence of a labeled training sample for training the classifier, the creation of which is extremely problematic in the context of the problem under consideration due to the lengthy process of data collection and labeling.

3. Practical issues of measuring cognitive load based on EEG data

As part of the experimental part of the work, the possibilities of measuring cognitive load from EEG data using Python libraries were investigated. The TAR index was used as a method for measuring cognitive load. A dataset from [19] was used as a data source. In the case of using a neuroheadset to obtain data in real time, it is necessary to use the appropriate technologies for streaming EEG data and libraries for recording EEG data into a file in *.edf format. For example, for the Emotiv Epoc neuroheadset, it is EMOTIV Cortex technology and cortex.py library.

The dataset under consideration contains records of three minutes of rest state and the first minute (out of four minutes of the task) of performing arithmetic tasks in the mind. The dataset contains records for 36 students. Since files with rest state recordings are actually about 3 minutes long (for example, for Subject03 the total duration is 2 minutes 50 seconds), and there are also several seconds with zero amplitude signals at the end of the recording, a fragment was selected from each recording to calculate the TAR index from the 20th second. The fragment was one minute long. For records of the arithmetic tasks execution, a section from 0 to 50 seconds is selected. The record segmentation scheme is shown in Figure 4. The size of the computation window (segment) is 6 seconds, the window overlap is 50%. The average TAR values for 36 participants are shown in Figure 5. As can be seen from Figure 5, for most of the participants, the average TAR index was greater in the first minute of calculations compared to the minute of rest. Perhaps participation in the experiment could be perceived by some participants as a stressful situation in itself, waiting for the assignment to be given could be accompanied by significant anxiety, and not all participants were able to really adapt three minutes before the start of rest state recording.

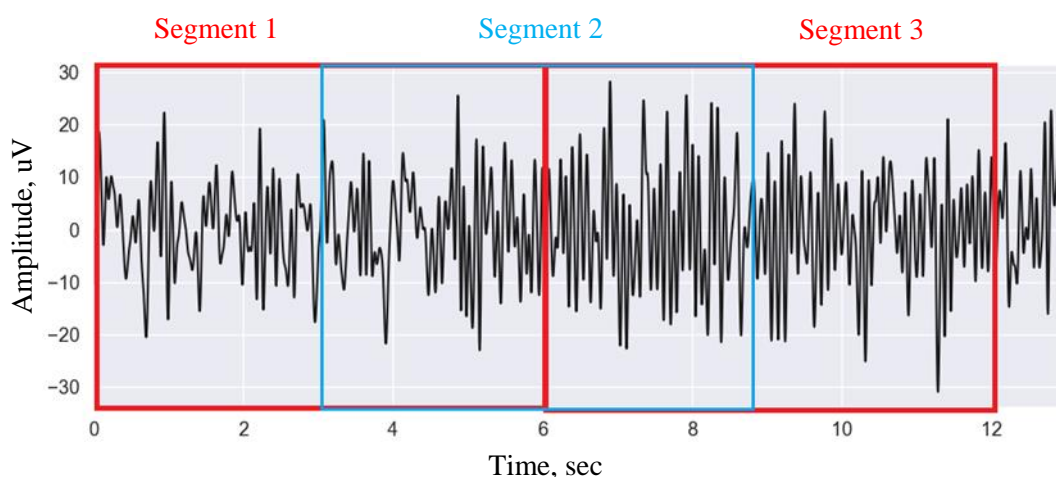


Figure 4: Six second segments with three seconds overlap

At the same time, considering the TAR index values by segment, several situations can be distinguished: 1) the average TAR index at rest state is lower than during arithmetic tasks, the fluctuation of the index at rest is insignificant, at the beginning of the solving of arithmetic tasks the TAR index rises and fluctuates slightly; 2) the average TAR index at rest state is lower than during arithmetic tasks, the fluctuation of the index at rest is insignificant, at the beginning of calculations the TAR index rises and continues to grow; 3) the average TAR index at rest state is higher than during computations, at the beginning of arithmetic tasks computations the TAR index decreases. The change in the TAR index by segments for participant No. 7 is shown in Figure 6.

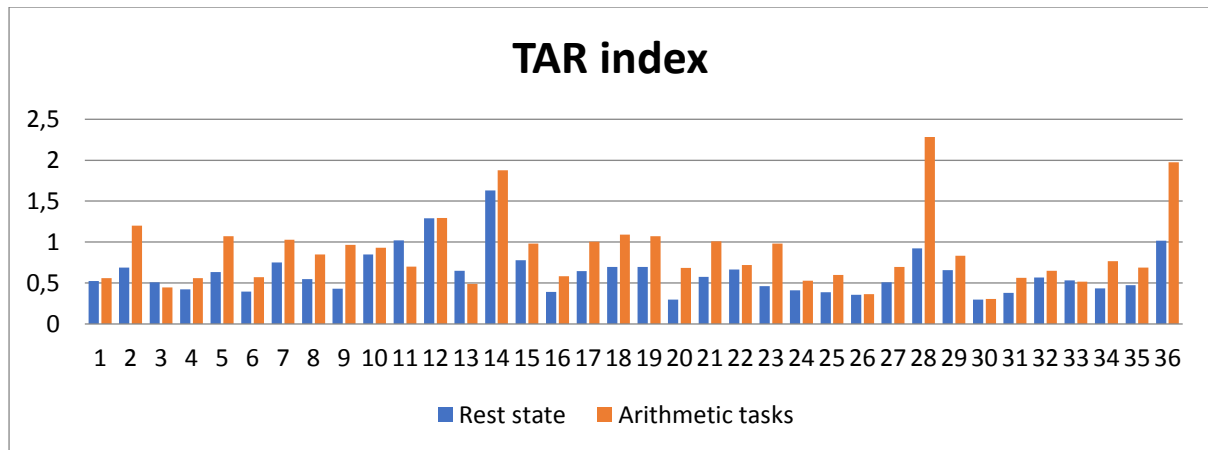


Figure 5: Theta-alpha ratio

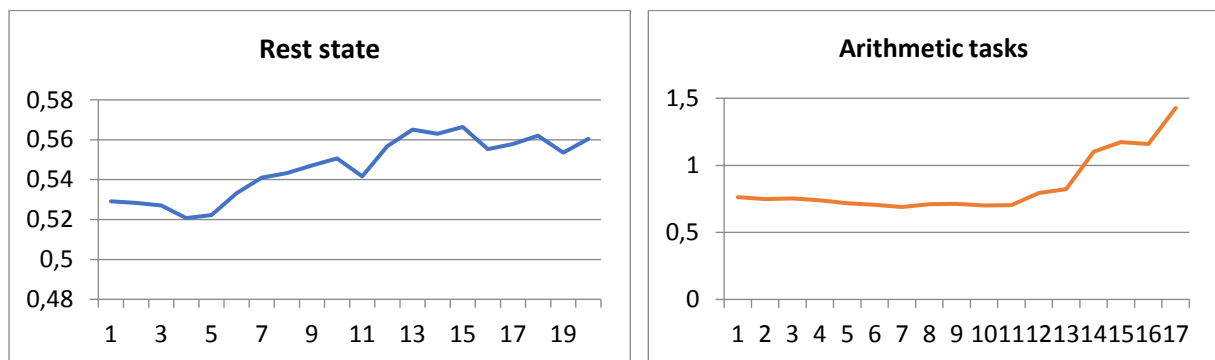


Figure 6: Dynamics of the TAR index for participant No. 7

For processing raw EEG data, a Python program was developed. The MNE Python library was used for loading and preprocessing the EEG data. After loading the data from the EDF file, the channel names are matched to the standard names from the 10-10 system. Next, the channels required for calculating the TAR index are selected. A 2-15 Hz bandpass filter is used to remove frequencies that are not used in the analysis. Then the data is segmented. The theta band spectral power and the alpha band spectral power are extracted for each segment, and then the TAR index is calculated for each segment. The pyEEG library was used to extract features. The average value of the TAR index is calculated from the array of obtained TAR indexes, the results are written to the file.

The conducted research allows us to draw the following conclusions. Monitoring the TAR index within intelligent learning systems can provide objective data on changes in cognitive load. However, its use will require the development of mechanisms that allow you to determine whether the growth of the index is due to the complexity of the task.

4. Conclusion

The need to choose hardware and software inevitably arises when developing intelligent learning systems involving the use of EEG neuroheadsets. These hardware and software should ensure processing of the EEG signals and the transmission of indicators for their inclusion into the model of knowledge about the student. The most suitable option for solving this problem seems to be the development of the software component that will be used to receive and process raw EEG data. This software component should accept information on the types of electrodes as input data, make it possible to choose a suitable method for measuring cognitive load from the knowledge base, and process the data of EEG signals from the electrodes of the neuroheadset. The software component must send to the output the results of the EEG data analysis for inclusion into the model of knowledge

about the student. In present article the issues of measuring cognitive load according to the EEG data were investigated, a software module in Python for performing this task was developed which can be used as a component for collecting and analyzing the EEG data.

5. Acknowledgements

The research is supported by Ministry of Science and Higher Education of Russian Federation (project No. FSUN-2020-0009).

6. References

- [1] A. Dan, M. Reiner. Real Time EEG Based Measurements of Cognitive Load Indicates Mental States During Learning. *Journal of Educational Data Mining*, 9(2):31-44, December 2017. DOI: 10.5281/zenodo.3554719.
- [2] N. Kumar, J. Kumar. Measurement of cognitive load in HCI systems using EEG power spectrum: An experimental study. *Procedia Computer Science*, 84:70–78, 2016. DOI: 10.1016/j.procs.2016.04.068.
- [3] T. Hwang, M. Kim, M. Hwangbo, E. Oh. Optimal set of EEG electrodes for real-time cognitive workload monitoring. *The 18th IEEE International Symposium on Consumer Electronics (ISCE 2014)*, JeJu Island, 2014, pp. 1-2. DOI: 10.1109/ISCE.2014.6884536.
- [4] T. Kosch, M. Funk, A. Schmidt, L. L. Chuang. Identifying Cognitive Assistance with Mobile Electroencephalography: A Case Study with In-Situ Projections for Manual Assembly. *Proc. ACM Hum.-Comput. Interact.*, 2(EICS):11:1–11:20, June 2018.
- [5] J. Kruger, S. Doherty. Measuring cognitive load in the presence of educational video: Towards a multimodal methodology. *Australas. J. Educ. Technol.* 32:19–31, 2016.
- [6] M. Chaouachi, I. Jraidi, C. Frasson. Modeling Mental Workload Using EEG Features for Intelligent Systems. In: Konstan J.A., Conejo R., Marzo J.L., Oliver N. (eds) *User Modeling, Adaption and Personalization. UMAP 2011. Lecture Notes in Computer Science*, vol 6787. Springer, Berlin, Heidelberg. DOI: 10.1007/978-3-642-22362-4_5
- [7] A. Heraz, C. Frasson, C. laude. Towards a Brain-Sensitive Intelligent Tutoring System: Detecting Emotions from Brainwaves. *Adv. Artificial Intelligence*, 2011. DOI: 10.1155/2011/384169.
- [8] P. Sawangjai, S. Hompoonsup, P. Leelaarporn, S. Kongwudhikunakorn, T. Wilaiprasitporn. Consumer Grade EEG Measuring Sensors as Research Tools: A Review. In: *IEEE Sensors Journal*, vol. 20, no. 8, pp. 3996-4024, 15 April 2020. doi: 10.1109/JSEN.2019.2962874.
- [9] G. M. Rojas, C. Alvarez, C.E. Montoya, M. de la Iglesia-Vayá, J.E. Cisternas, M. Gálvez. Study of Resting-State Functional Connectivity Networks Using EEG Electrodes Position As Seed. *Front Neurosci.* 12:235, Apr 2018. doi:10.3389/fnins.2018.0023.
- [10] P. Campisi, D. L. Rocca. Brain waves for automatic biometric-based user recognition. In: *IEEE Transactions on Information Forensics and Security*, vol. 9(5), pp. 782-800, May 2014. doi: 10.1109/TIFS.2014.2308640.
- [11] E. Herder, S. Sosnovsky, V. Dimitrova. Adaptive Intelligent Learning Environments. In: Duval E., Sharples M., Sutherland R. (eds) *Technology Enhanced Learning*. Springer, Cham. 2017. DOI: 10.1007/978-3-319-02600-8_10.
- [12] M. Elsom-Cook. Student modelling in intelligent tutoring systems. *Artif Intell Rev*, 7:227–240, 1993. DOI: 10.1007/BF00849556.
- [13] C. Mills, I. Fridman, W. Soussou, D. Waghay, A. Olney, S. D'Mello. Put your thinking cap on: detecting cognitive load using EEG during learning. *ICPS Proceedings* pp. 80-89. 2017. DOI: 10.1145/3027385.3027431.
- [14] F. Alqahtani, R. Naeem. Comparison and Efficacy of Synergistic Intelligent Tutoring Systems with Human Physiological Response. *Sensors (Basel)*, 19(3):460. 23 Jan. 2019. DOI: 10.3390/s19030460.
- [15] M. Plechawska-Wójcik, M. Tokovarov, M. Kaczorowska, D. Zapala, A Three-Class Classification of Cognitive Workload Based on EEG Spectral Data. *Appl. Sci.* 9:5340, 2019.

- [16] P.Antonenko, F. Paas, R. Grabner, et al. Using Electroencephalography to Measure Cognitive Load. *Educ Psychol Rev*, 22:425–438, 2010. DOI: 10.1007/s10648-010-9130-y.
- [17] L.Cabañero, R.Hervás, I.González, J.Fontecha, T.Mondéjar, J. Bravo. Analysis of Cognitive Load Using EEG when Interacting with Mobile Devices. *Proceedings*, 31:70, 2019.
- [18] J.P. Trammell, P.G .MacRae, G. Davis, D. Bergstedt, A. E. Anderson. The Relationship of Cognitive Performance and the Theta-Alpha Power Ratio Is Age-Dependent: An EEG Study of Short Term Memory and Reasoning during Task and Resting-State in Healthy Young and Old Adults. *Front Aging Neurosci*, 9:364, Nov 2017. DOI: 10.3389/fnagi.2017.00364.
- [19] I. Zyma, S. Tukaev, I. Seleznev, K. Kiyono, A .Popov, M. Chernykh, O. Shpenkov, Electroencephalograms during Mental Arithmetic Task Performance. *Data*, 4:14, 2019.