


INPUT → 20 Hz SUBSONIC HIGH-PASS (U1A) → CUT SUMMER A (U1B)




INVERTER (U1C) → BAND-PASS CELLS ; BOOST SUMMER B (U1D) → OUTPUT

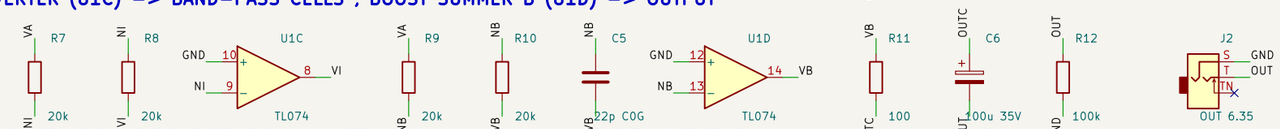

BANDS 31 / 40 / 50 / 63 / 80 Hz: MFB band-pass (gain −1, Q 4.3, JLCPCB Basic values in series) + 20k detent pot, CW = boost

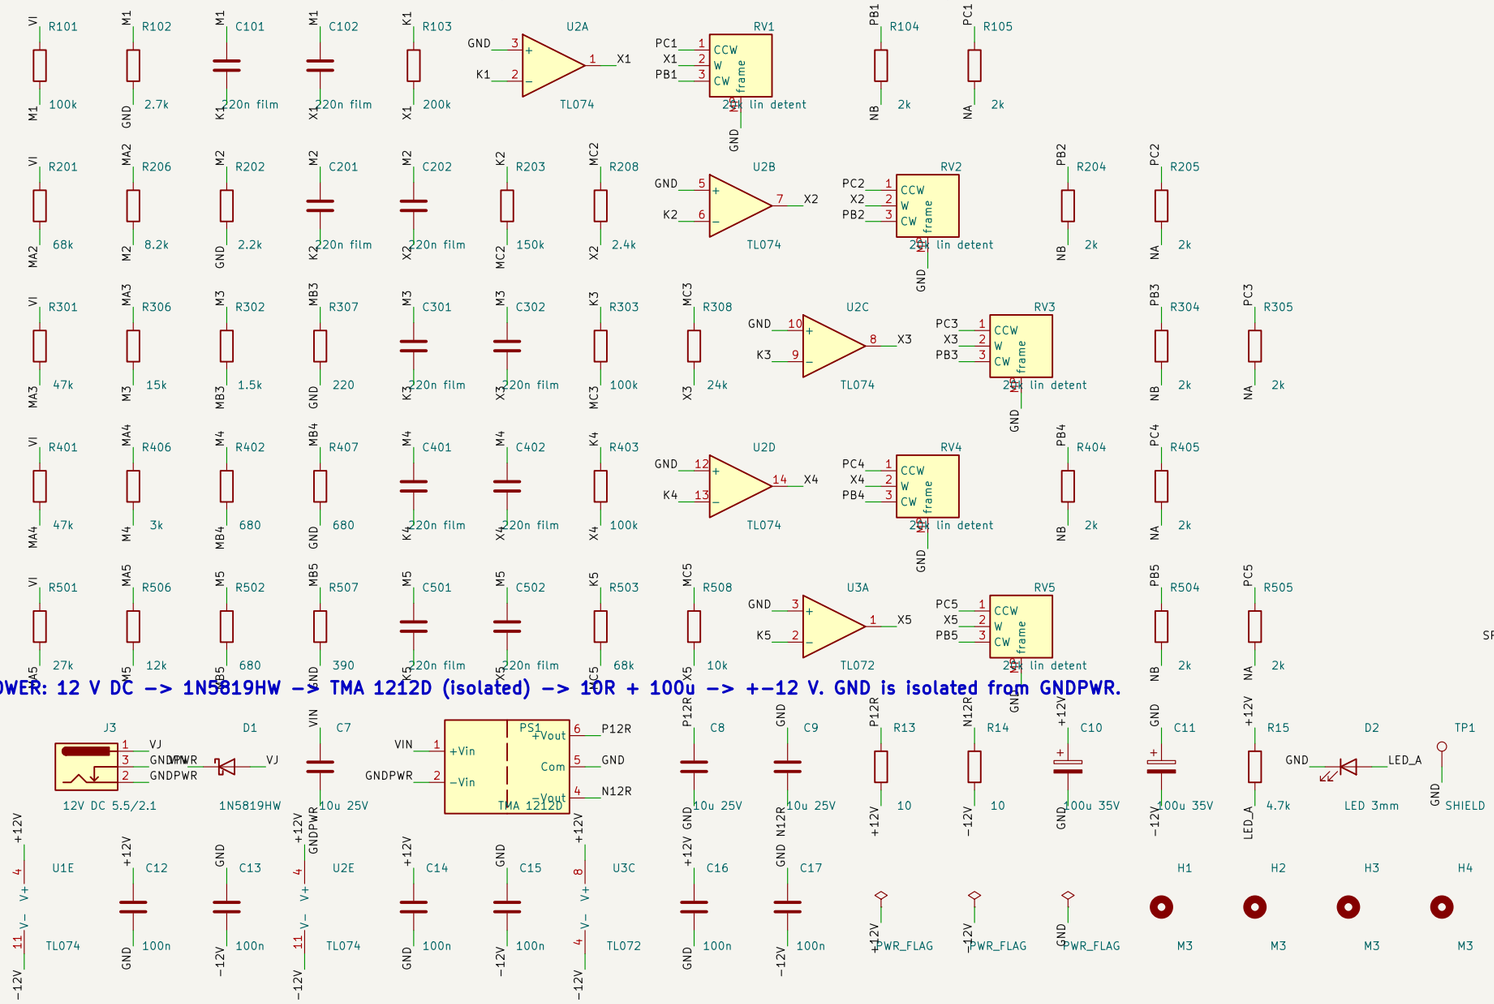

POWER: 12 V DC → 1N5819HW → TMA 1212D (isolated) → 10R + 100u → +−12 V. GND is isolated from GNDPWR.

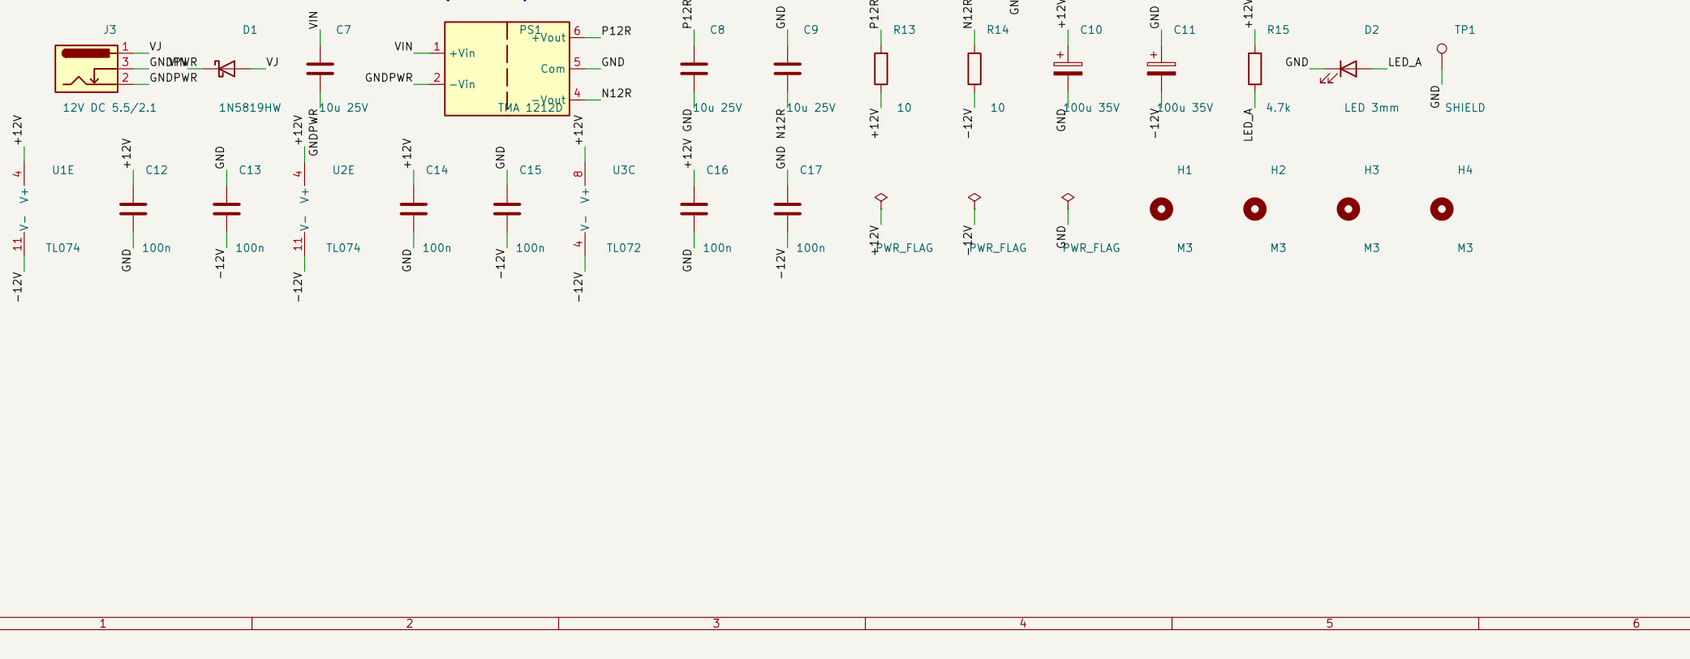

Generated by hardware/scripts/gen_schematic.py from circuit.py

Sheet: /
File: sub-eq.kicad_sch

Title: Sub EQ — 5-band graphic EQ for subwoofers (31 / 40 / 50 / 63 / 8

Size: A3	Date: 2026-11-10	**Rev: 1**
KiCad E.D.A. 10.0.8		Id: 1/1